


Quick Guide to the Sekonic L-308

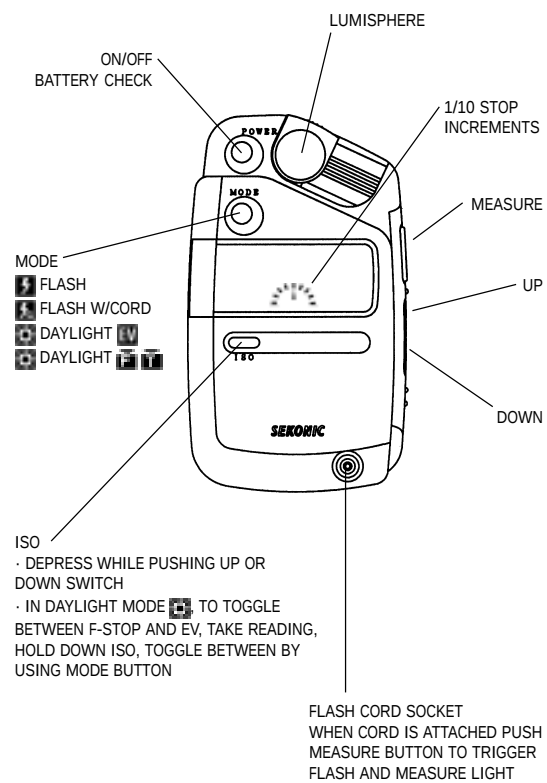

Basic Operation - Sekonic L-308

On/Off/Battery Check

Press Power button. To check battery power hold down button. Power is indicated in 1/10th steps

Set ISO

Hold down ISO button while depressing Up or Down button

Use as Reflected Meter

Slide Lumisphere away to expose meter cell

Use as Incident Meter

Slide Lumisphere over meter cell

Measure Brightness /Contrast Difference

Clip in flat Lumidisc over meter cell

Daylight Reading

Select  Daylight Mode, depress Measure button

Cordless Flash Reading

Select  Flash Mode, depress Measure button, manually trigger flash

Flash Reading Using Flash Cord

Select  Flash with Cord Mode, insert flash cord, depress Measure button

EV Reading

Select  Daylight EV Mode. In Daylight Mode, toggle between F/Stop and EV readout by holding down ISO button and depressing Mode button