











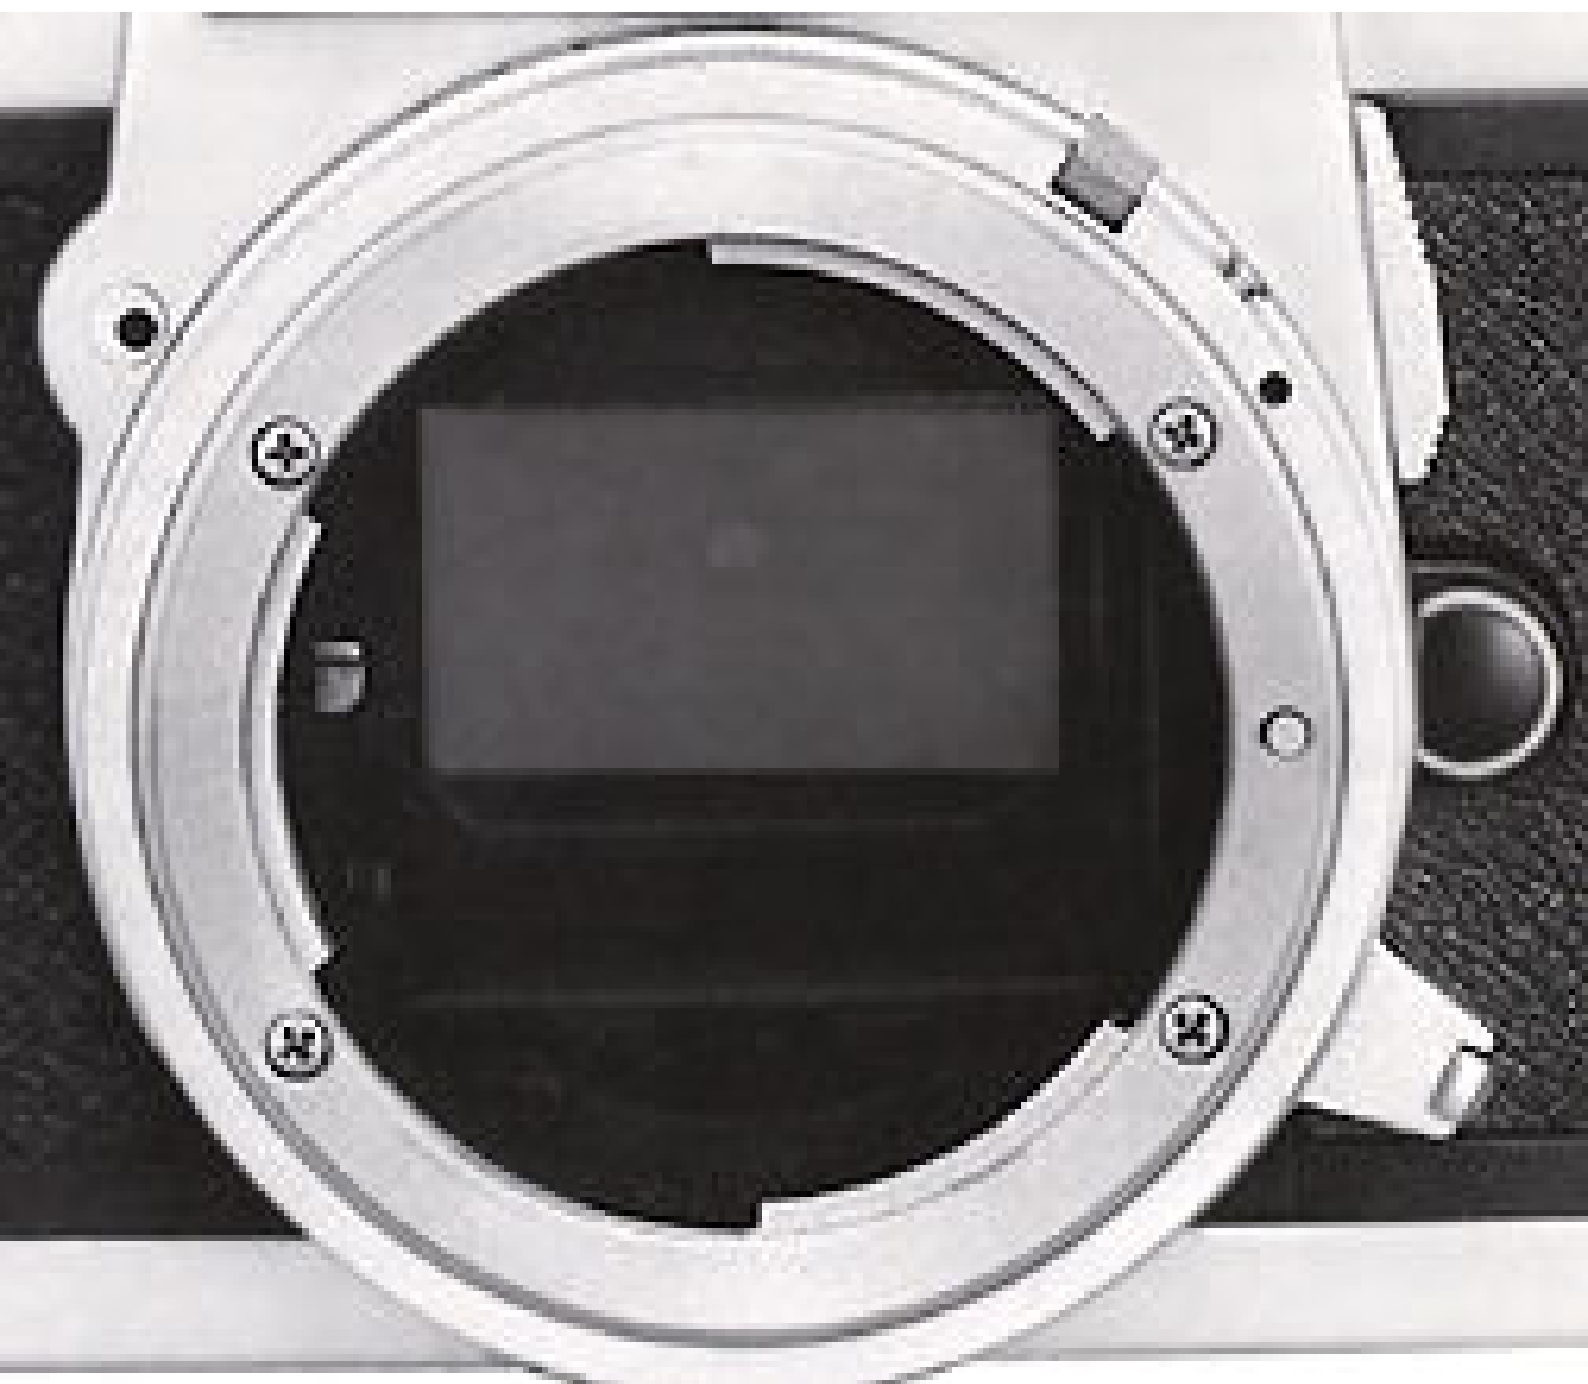

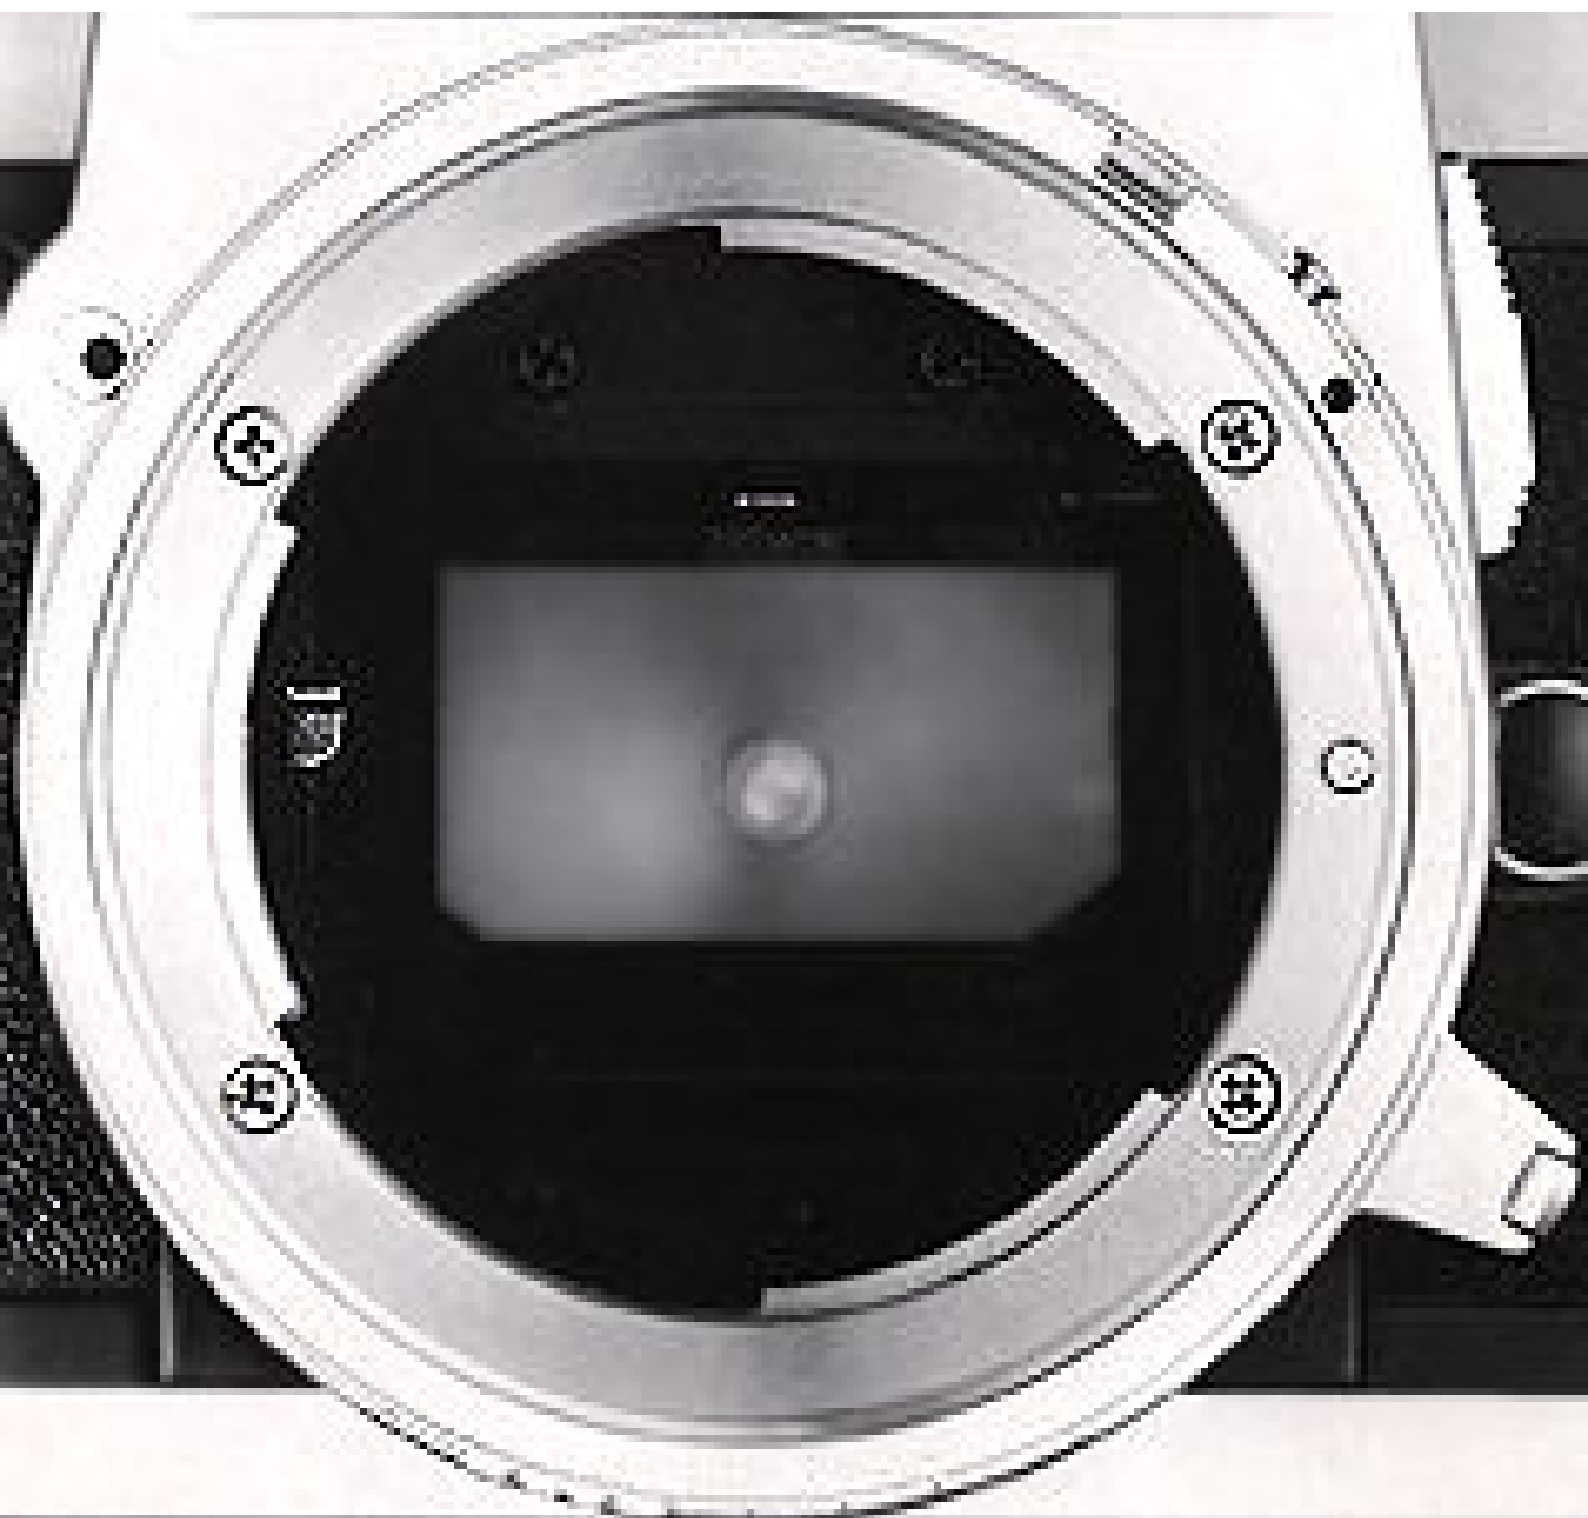


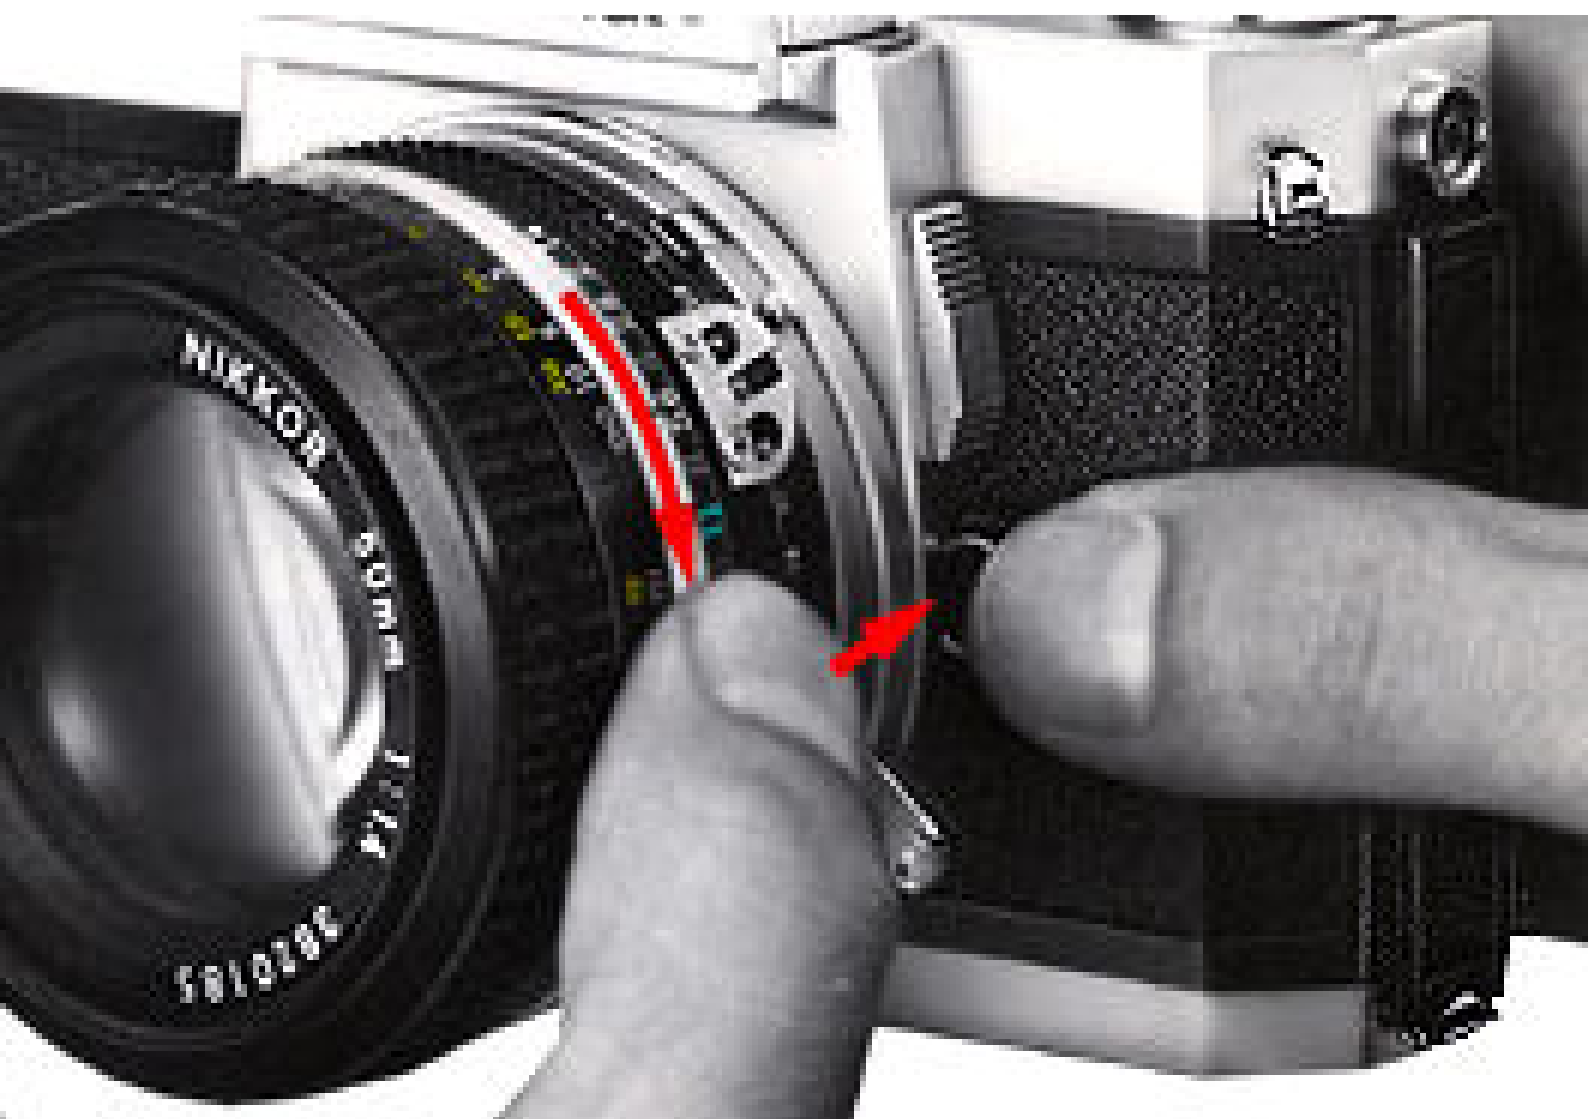

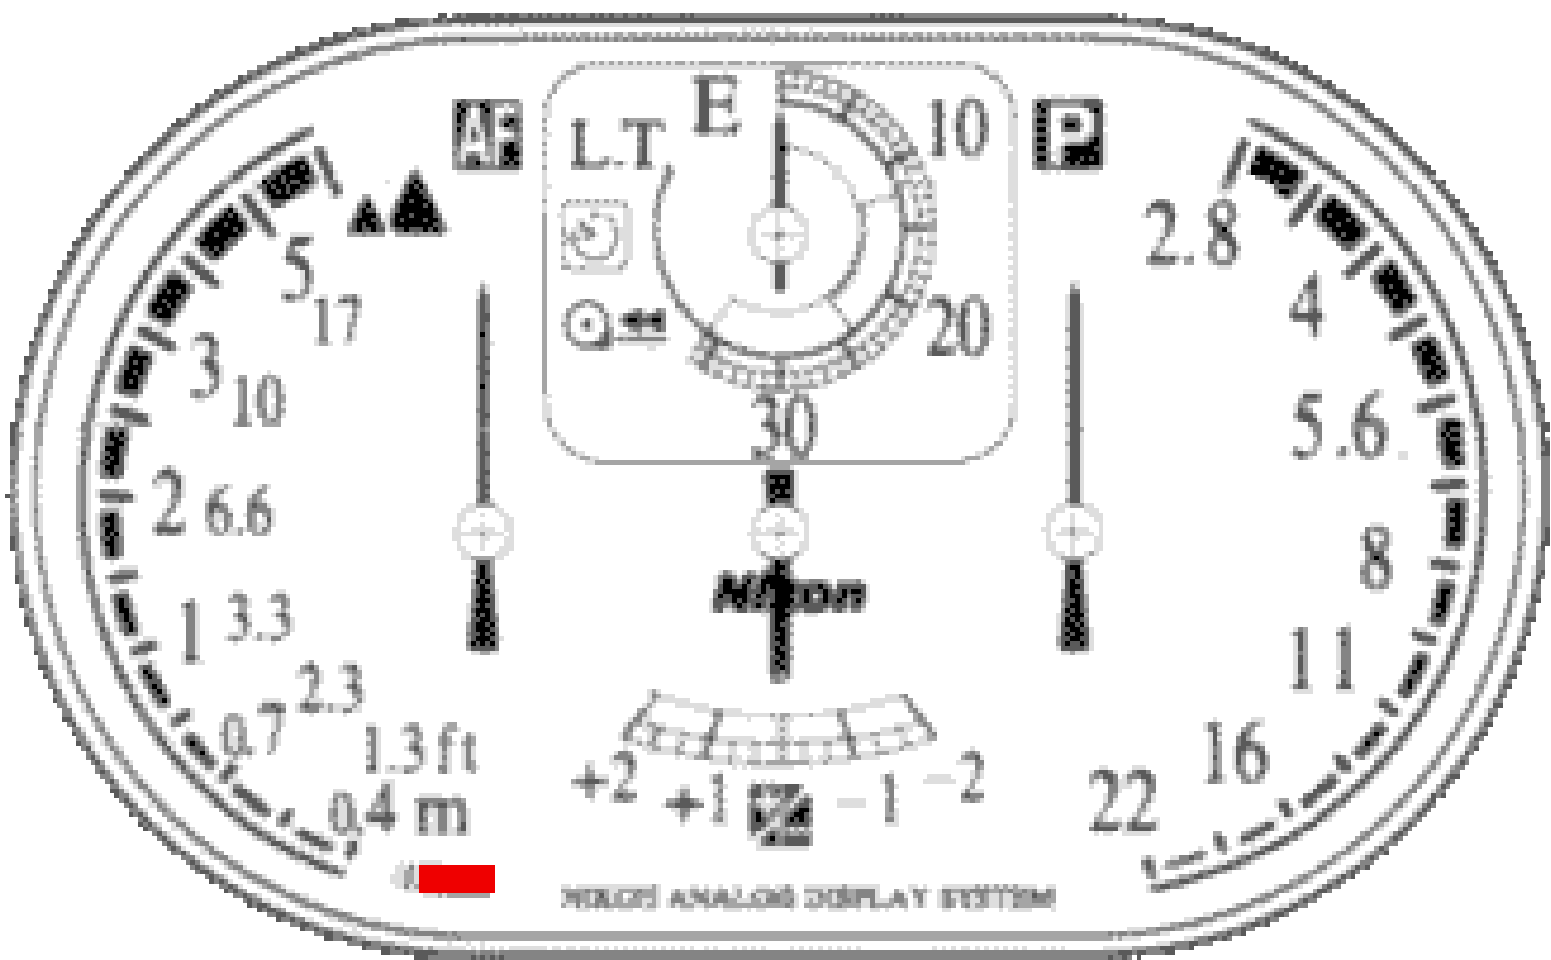





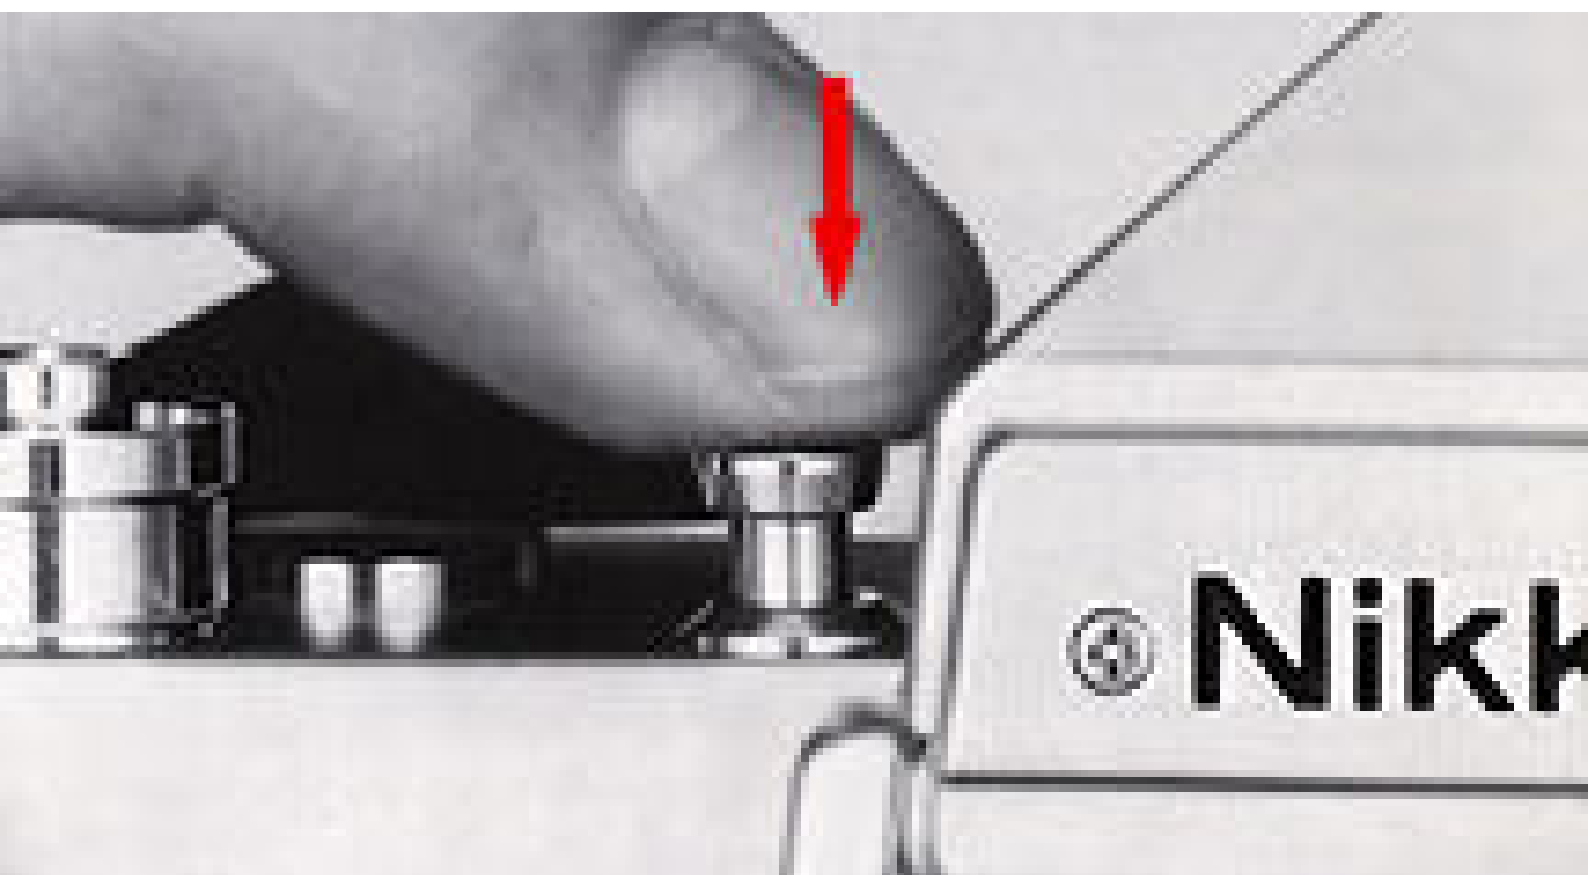





+ ϕ -

FT3 6000060

















Shutter Flashbulb Speed	1000	500	250	125	60	30	15	8	4	2	1	0
M												
FP												
MF												
X												

- Synchronized
- Cannot be used


*Some M class bulbs that have shorter flash duration may not cover these speeds.











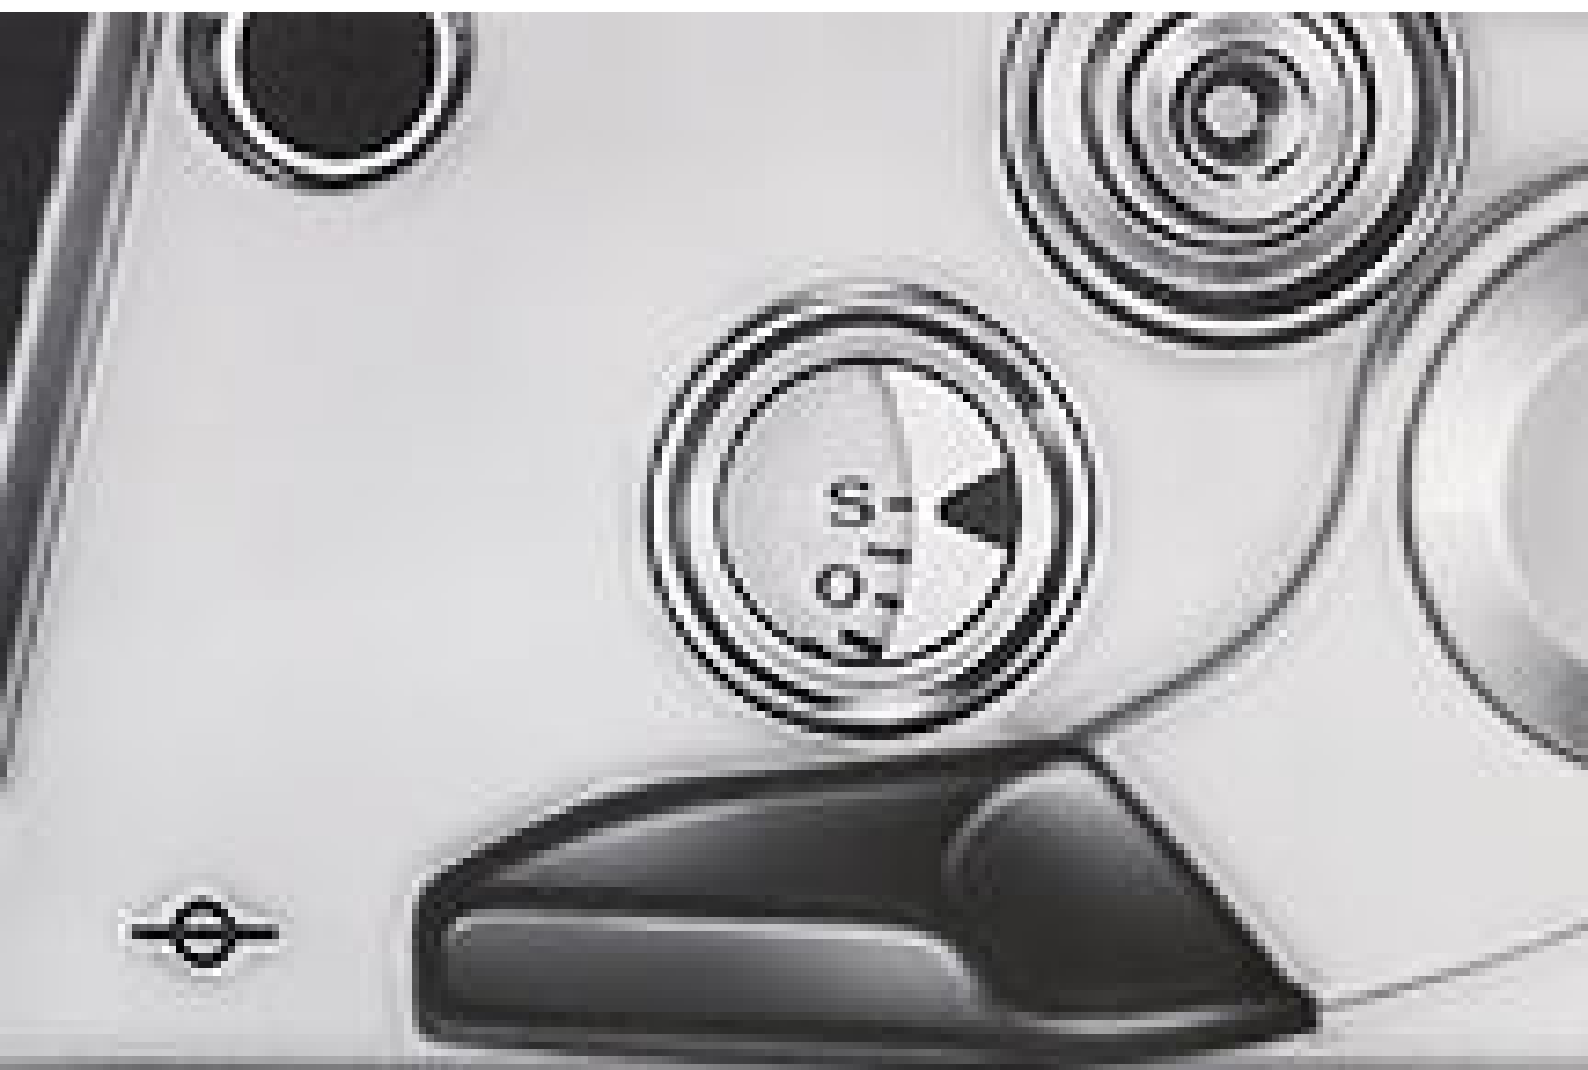


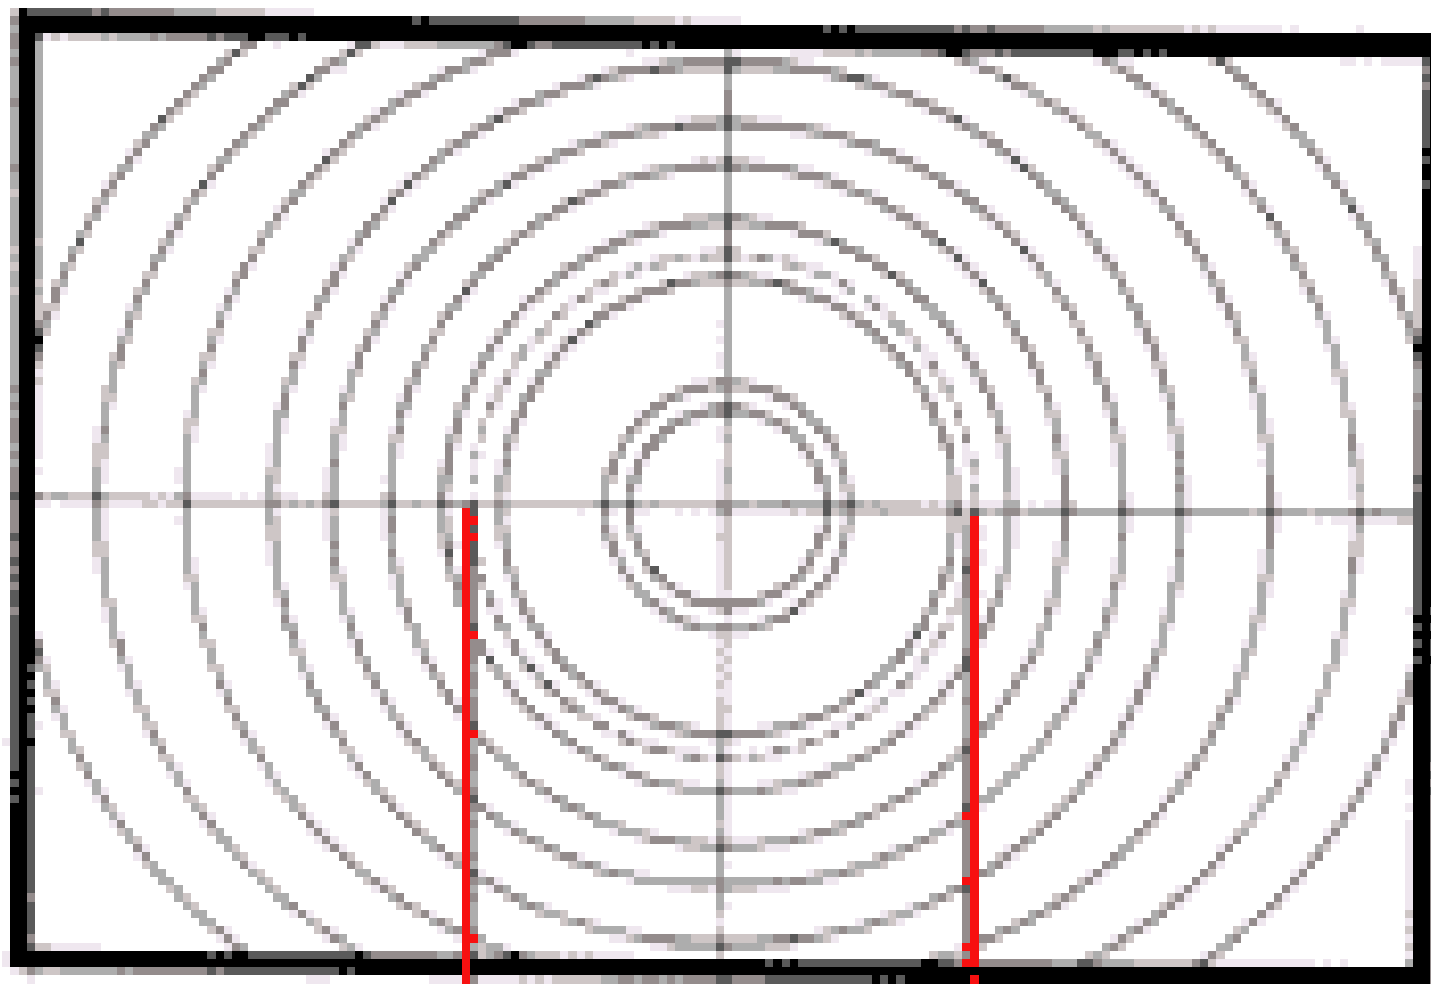

Measuring sensitivity contours

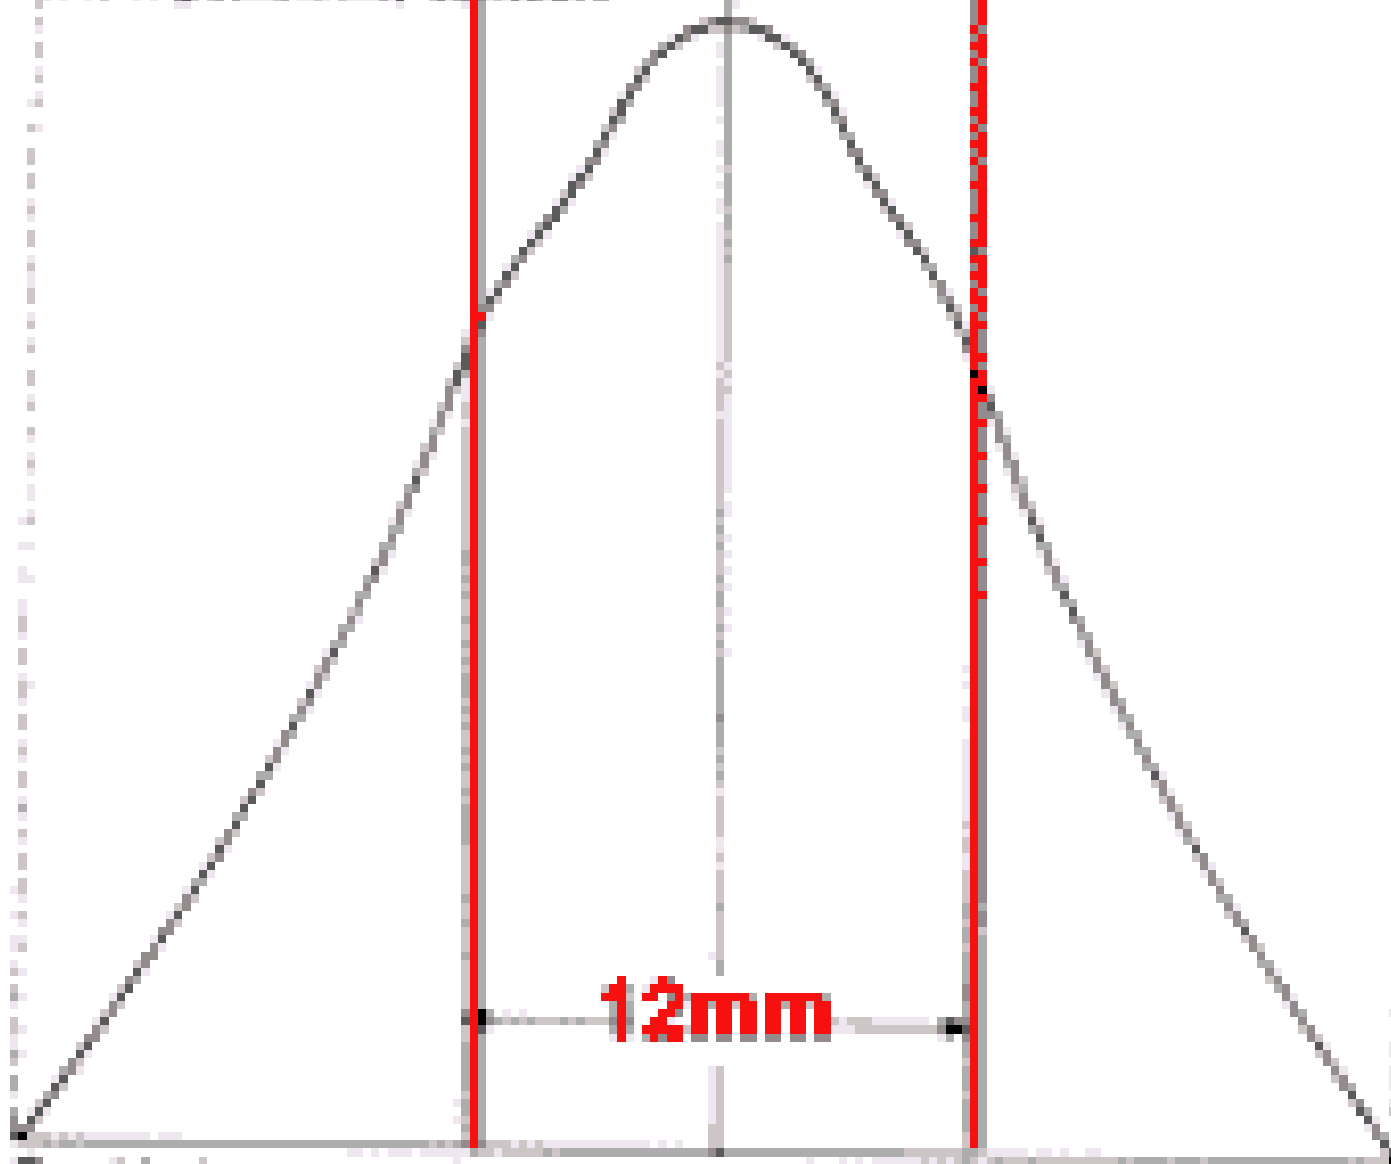

Graphical representation

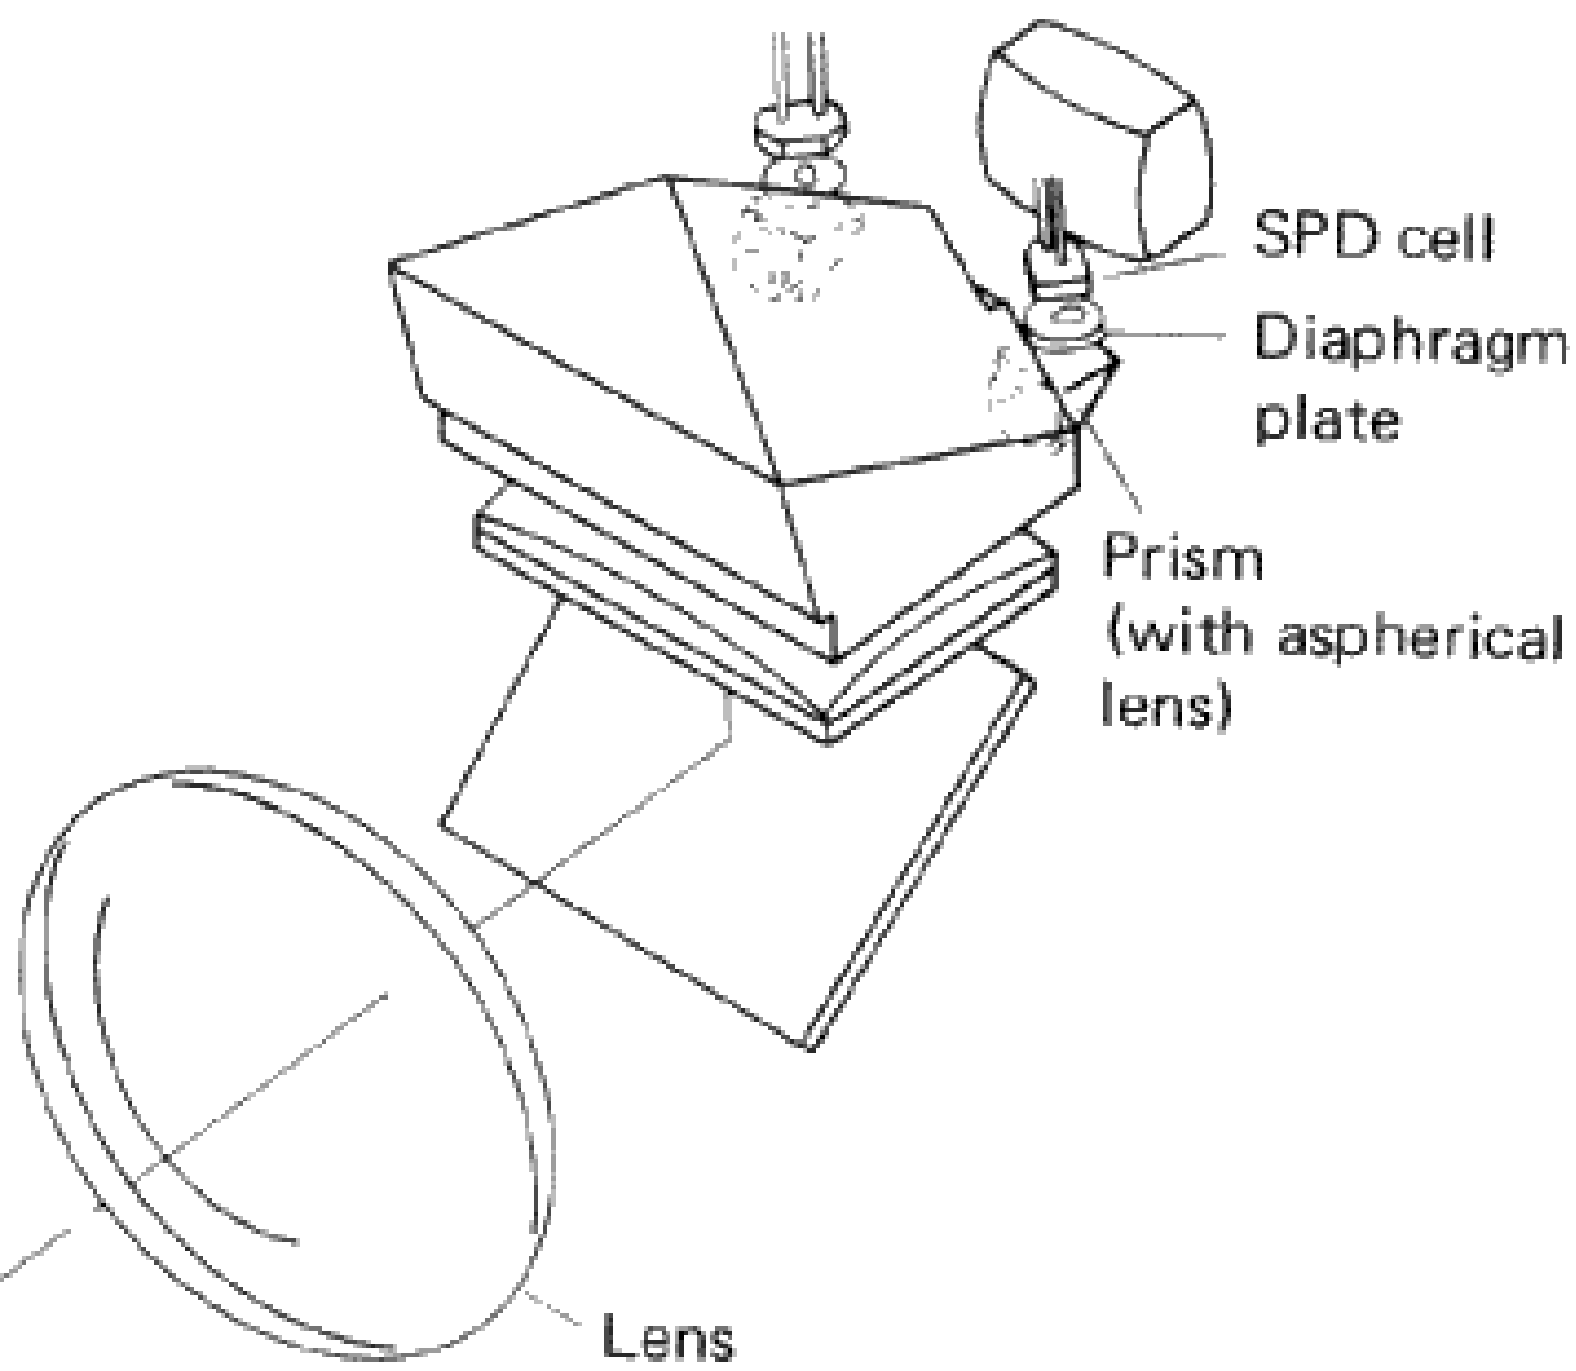
















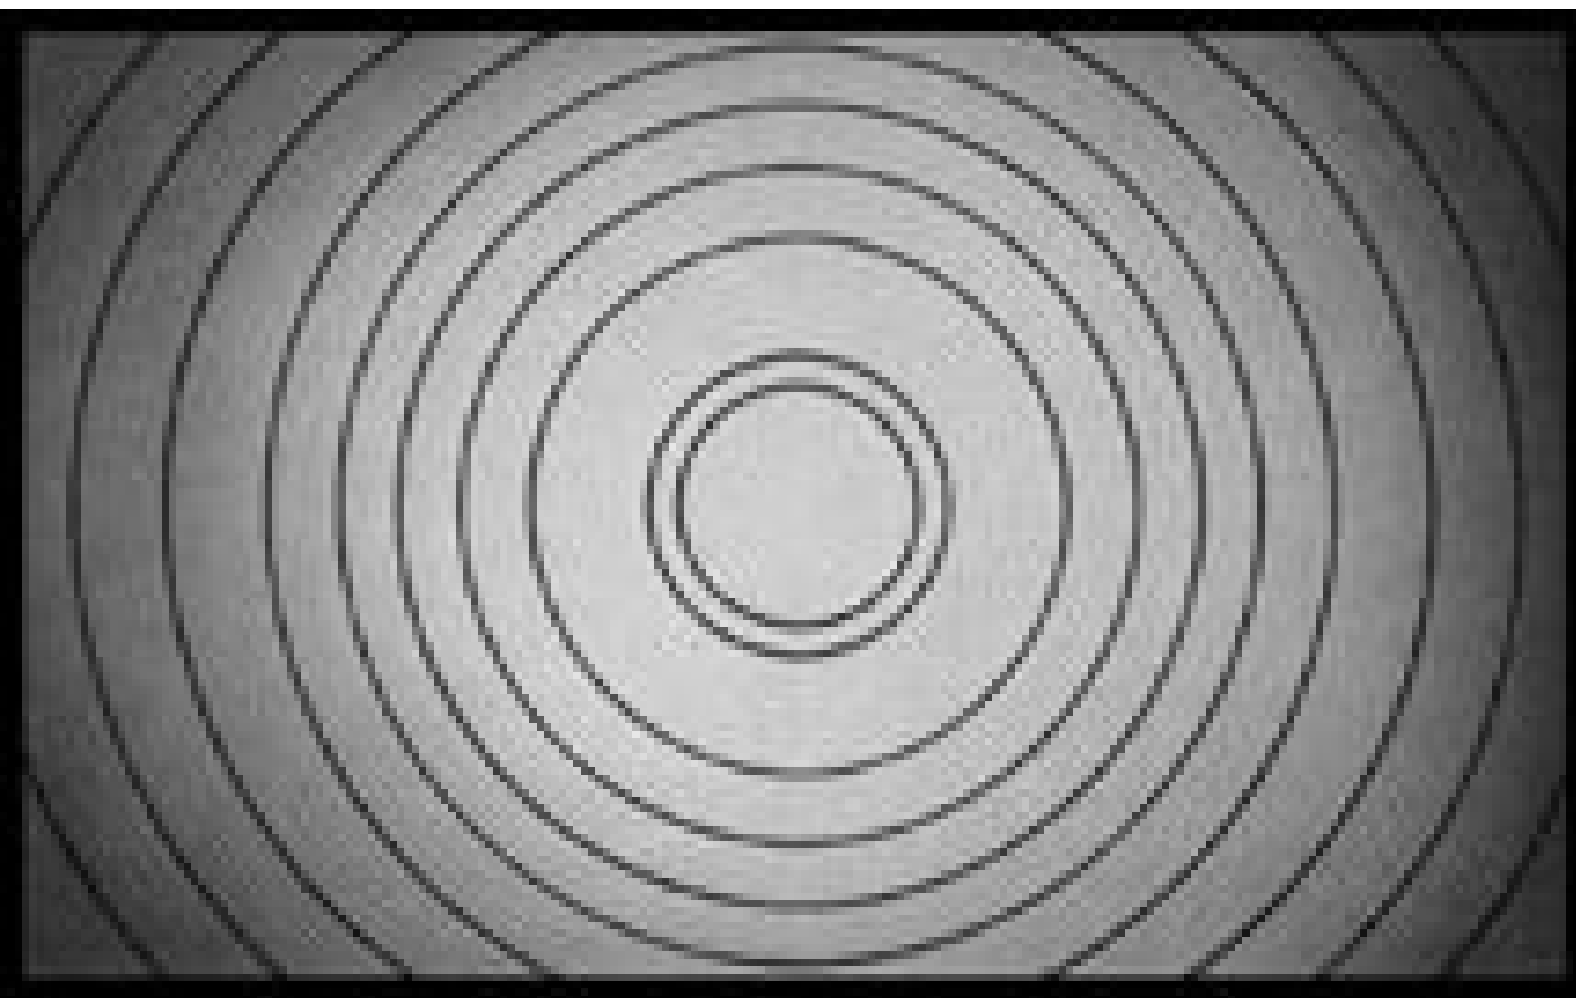



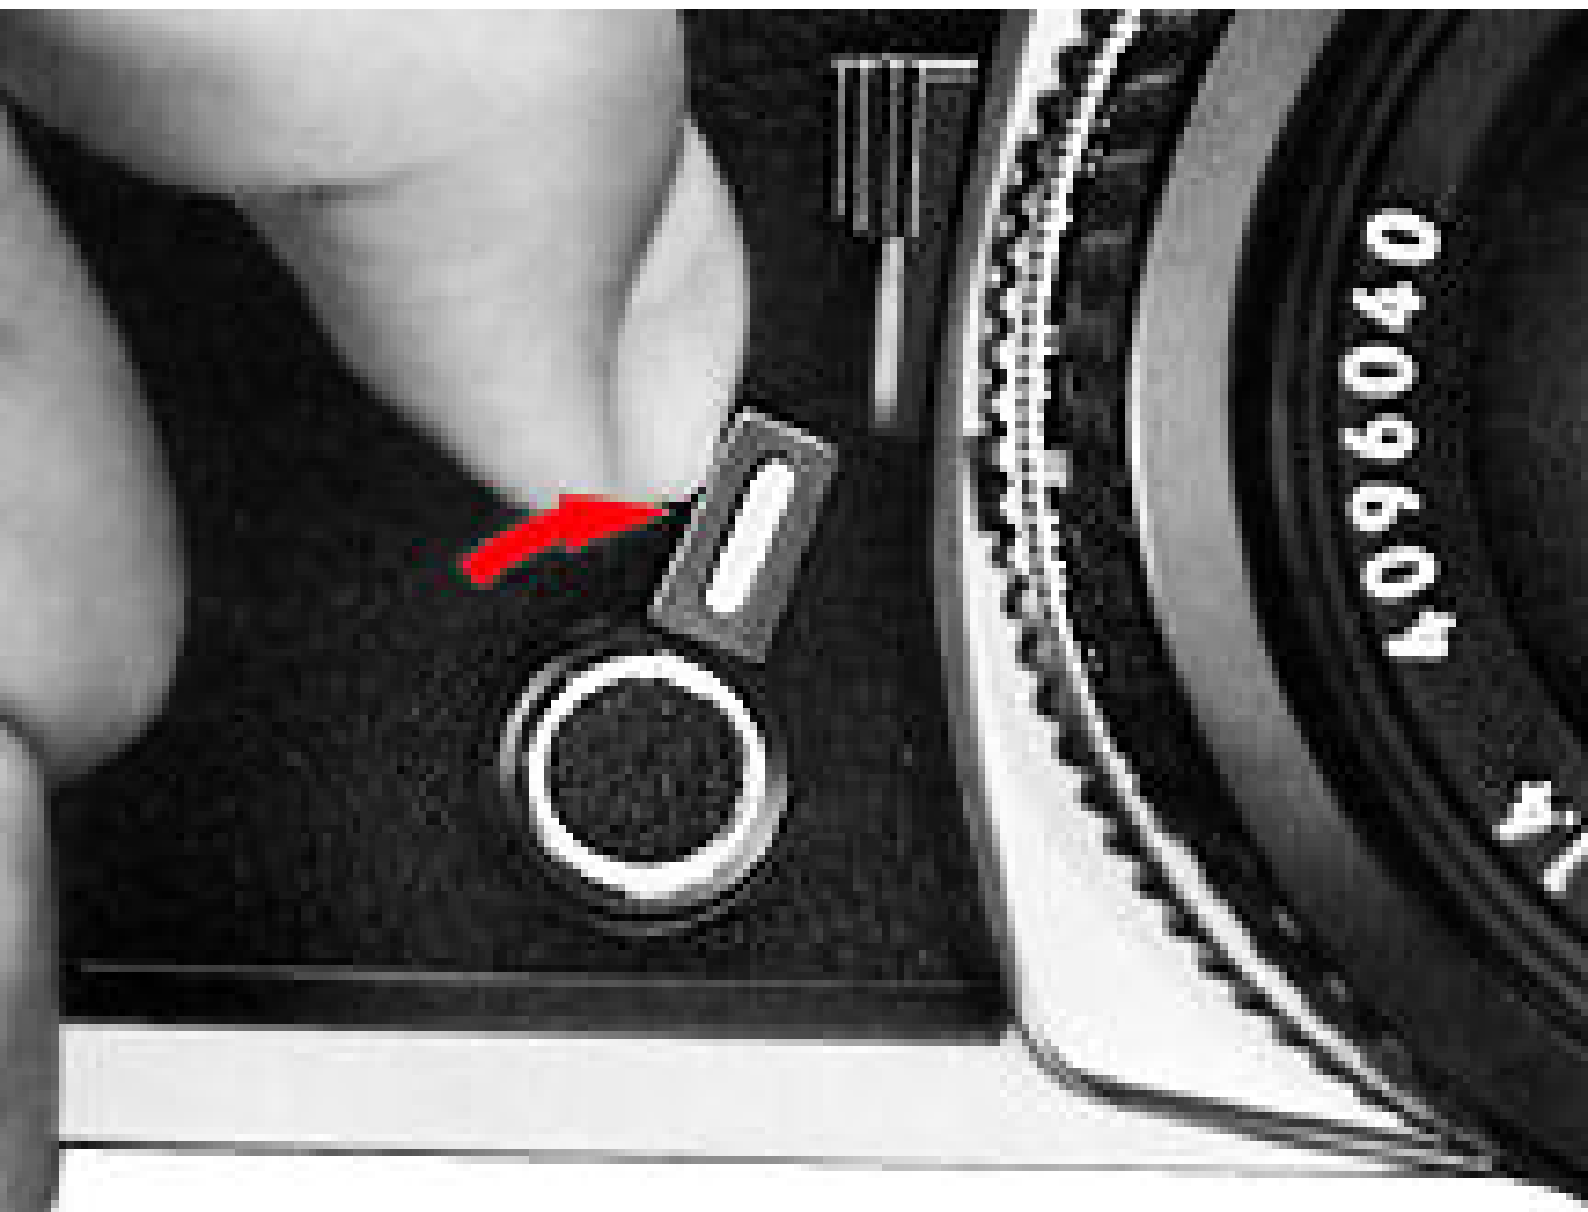




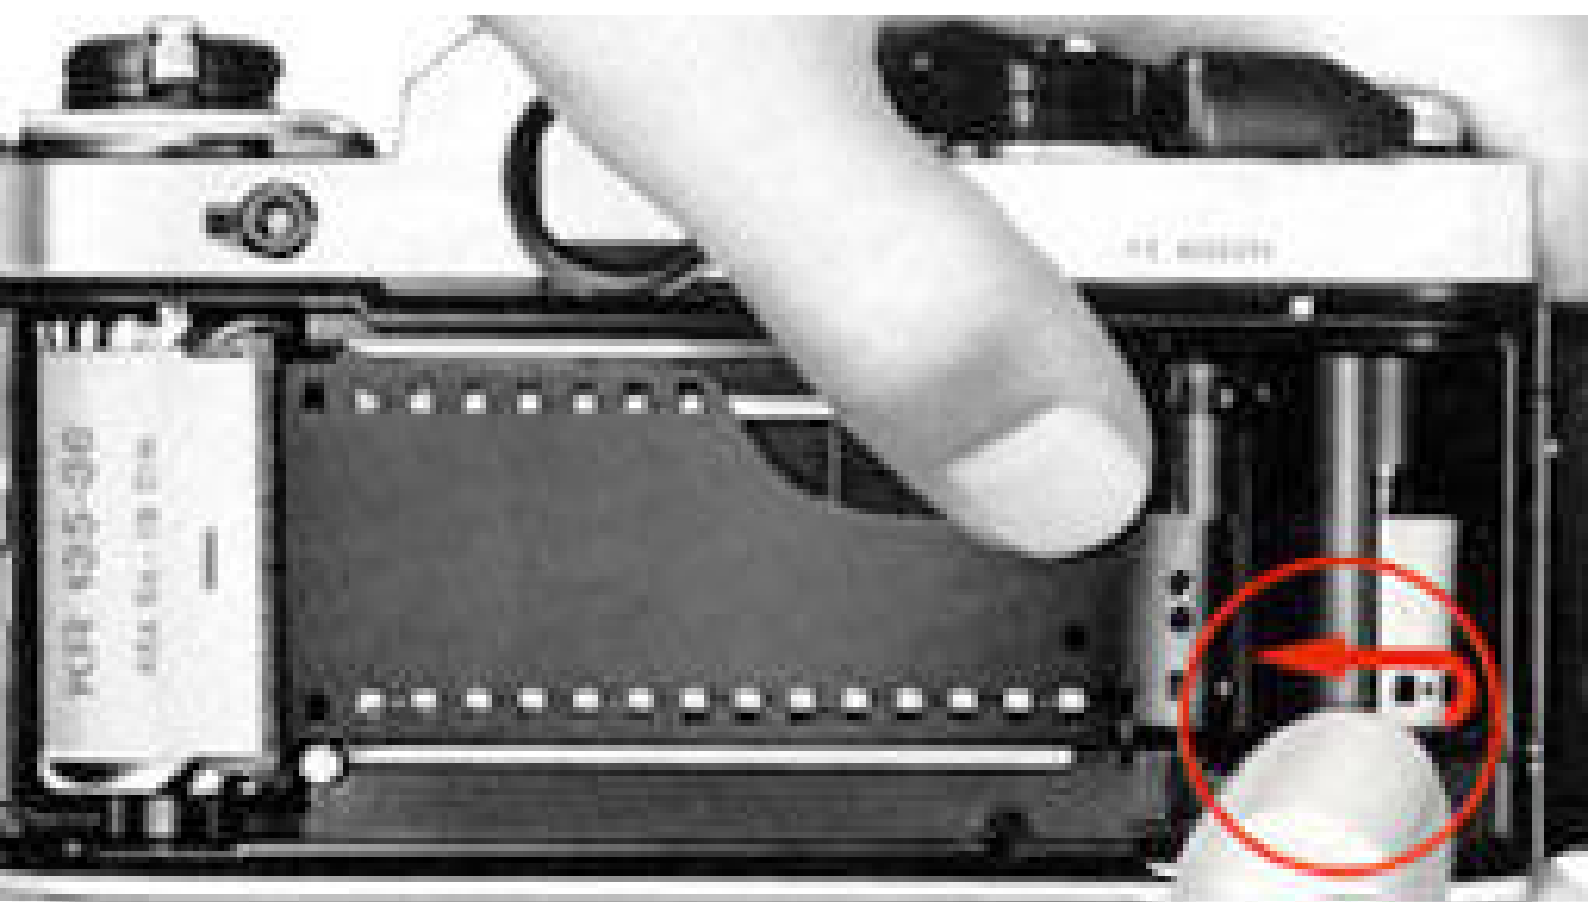







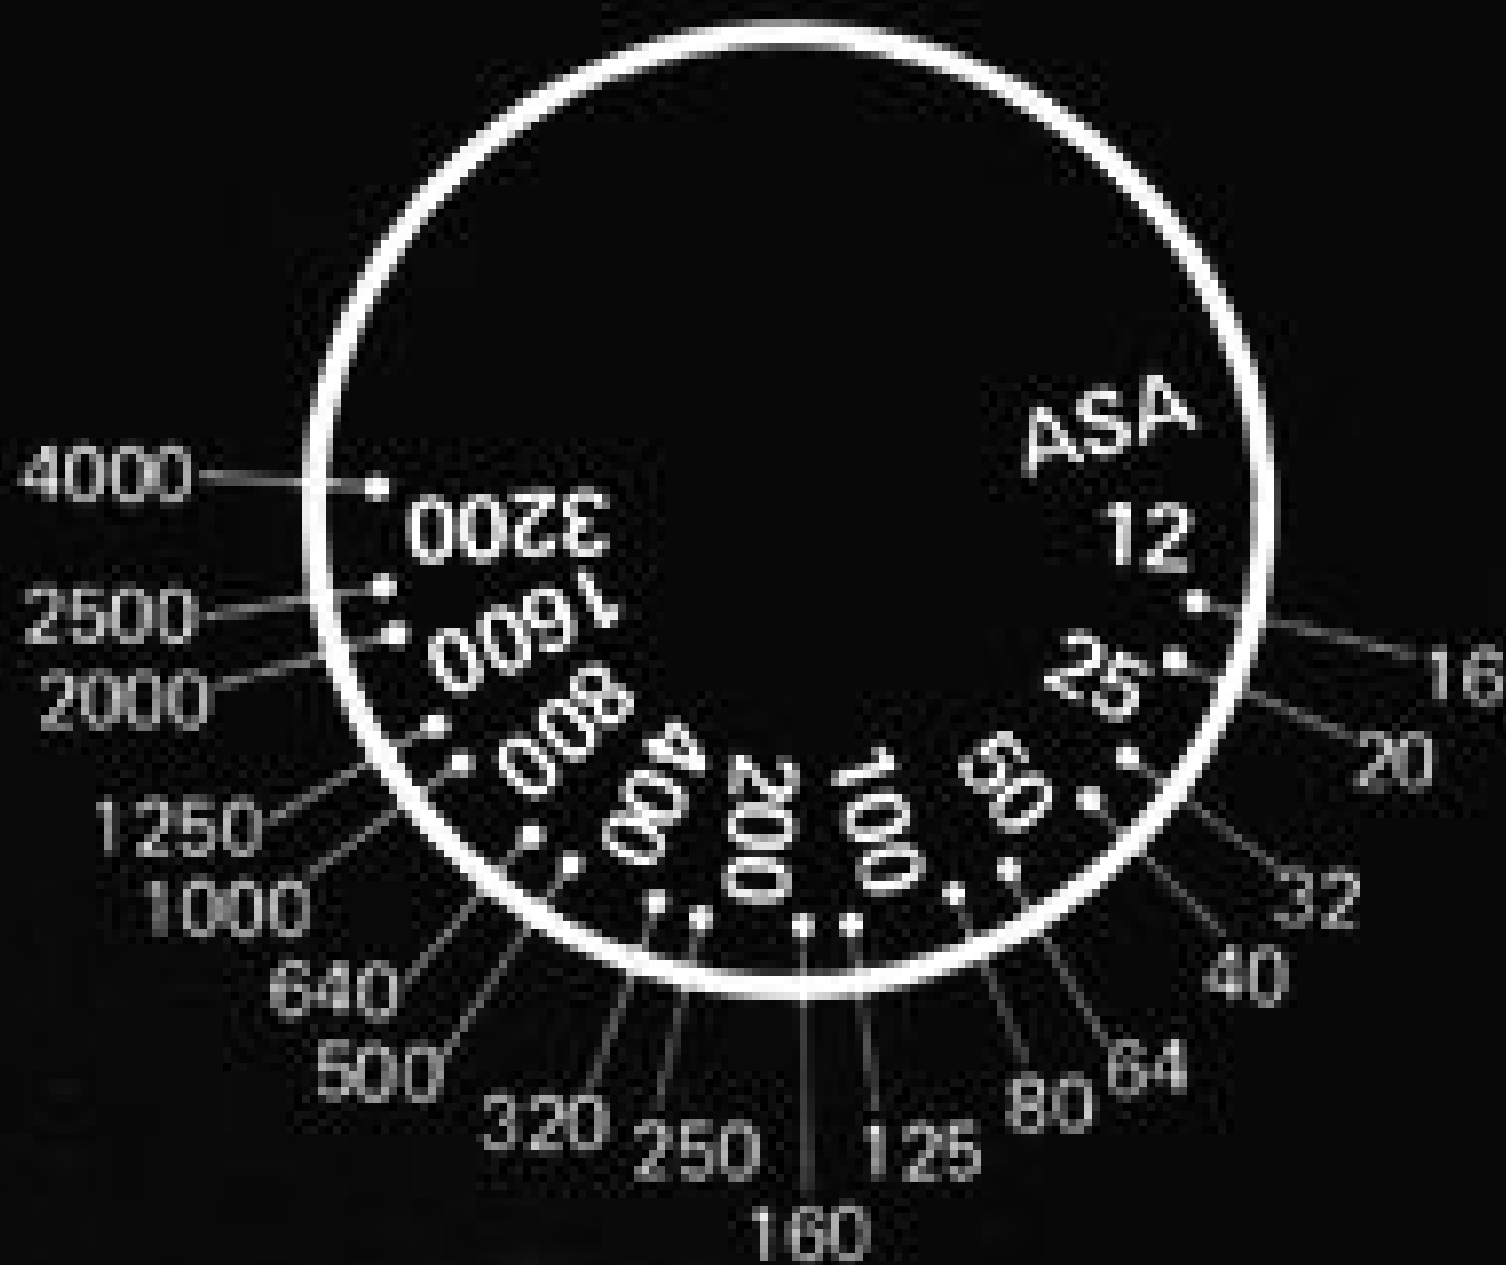







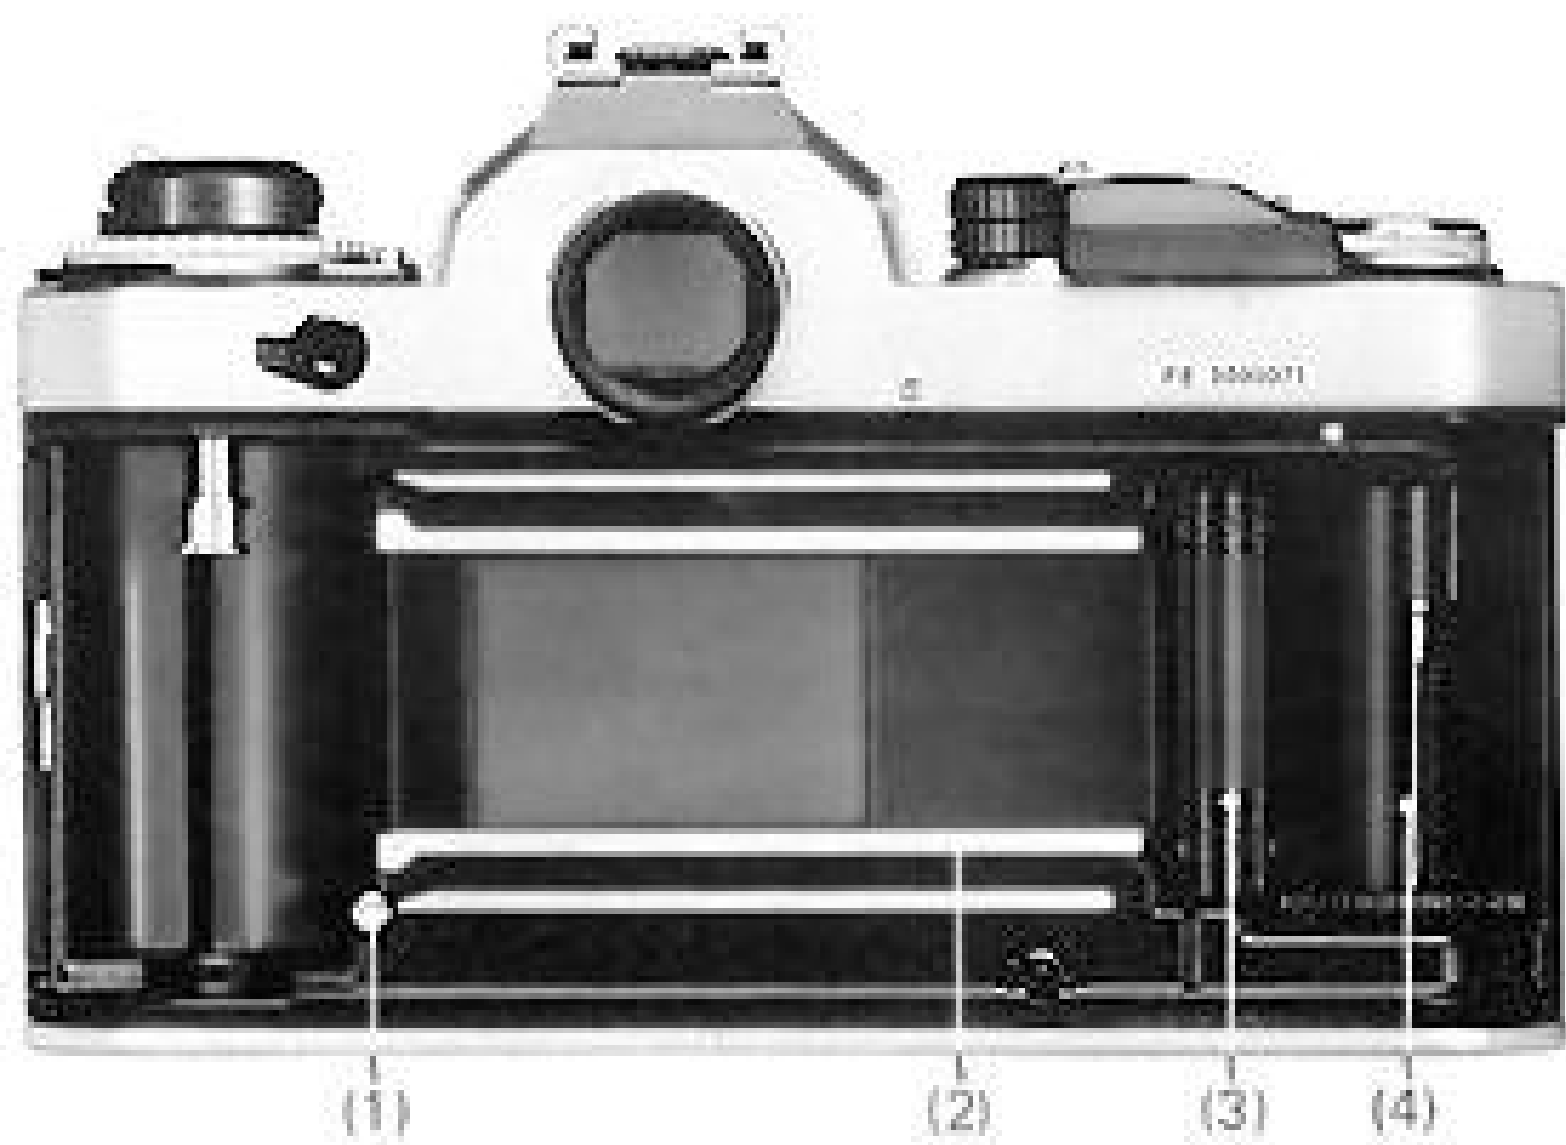


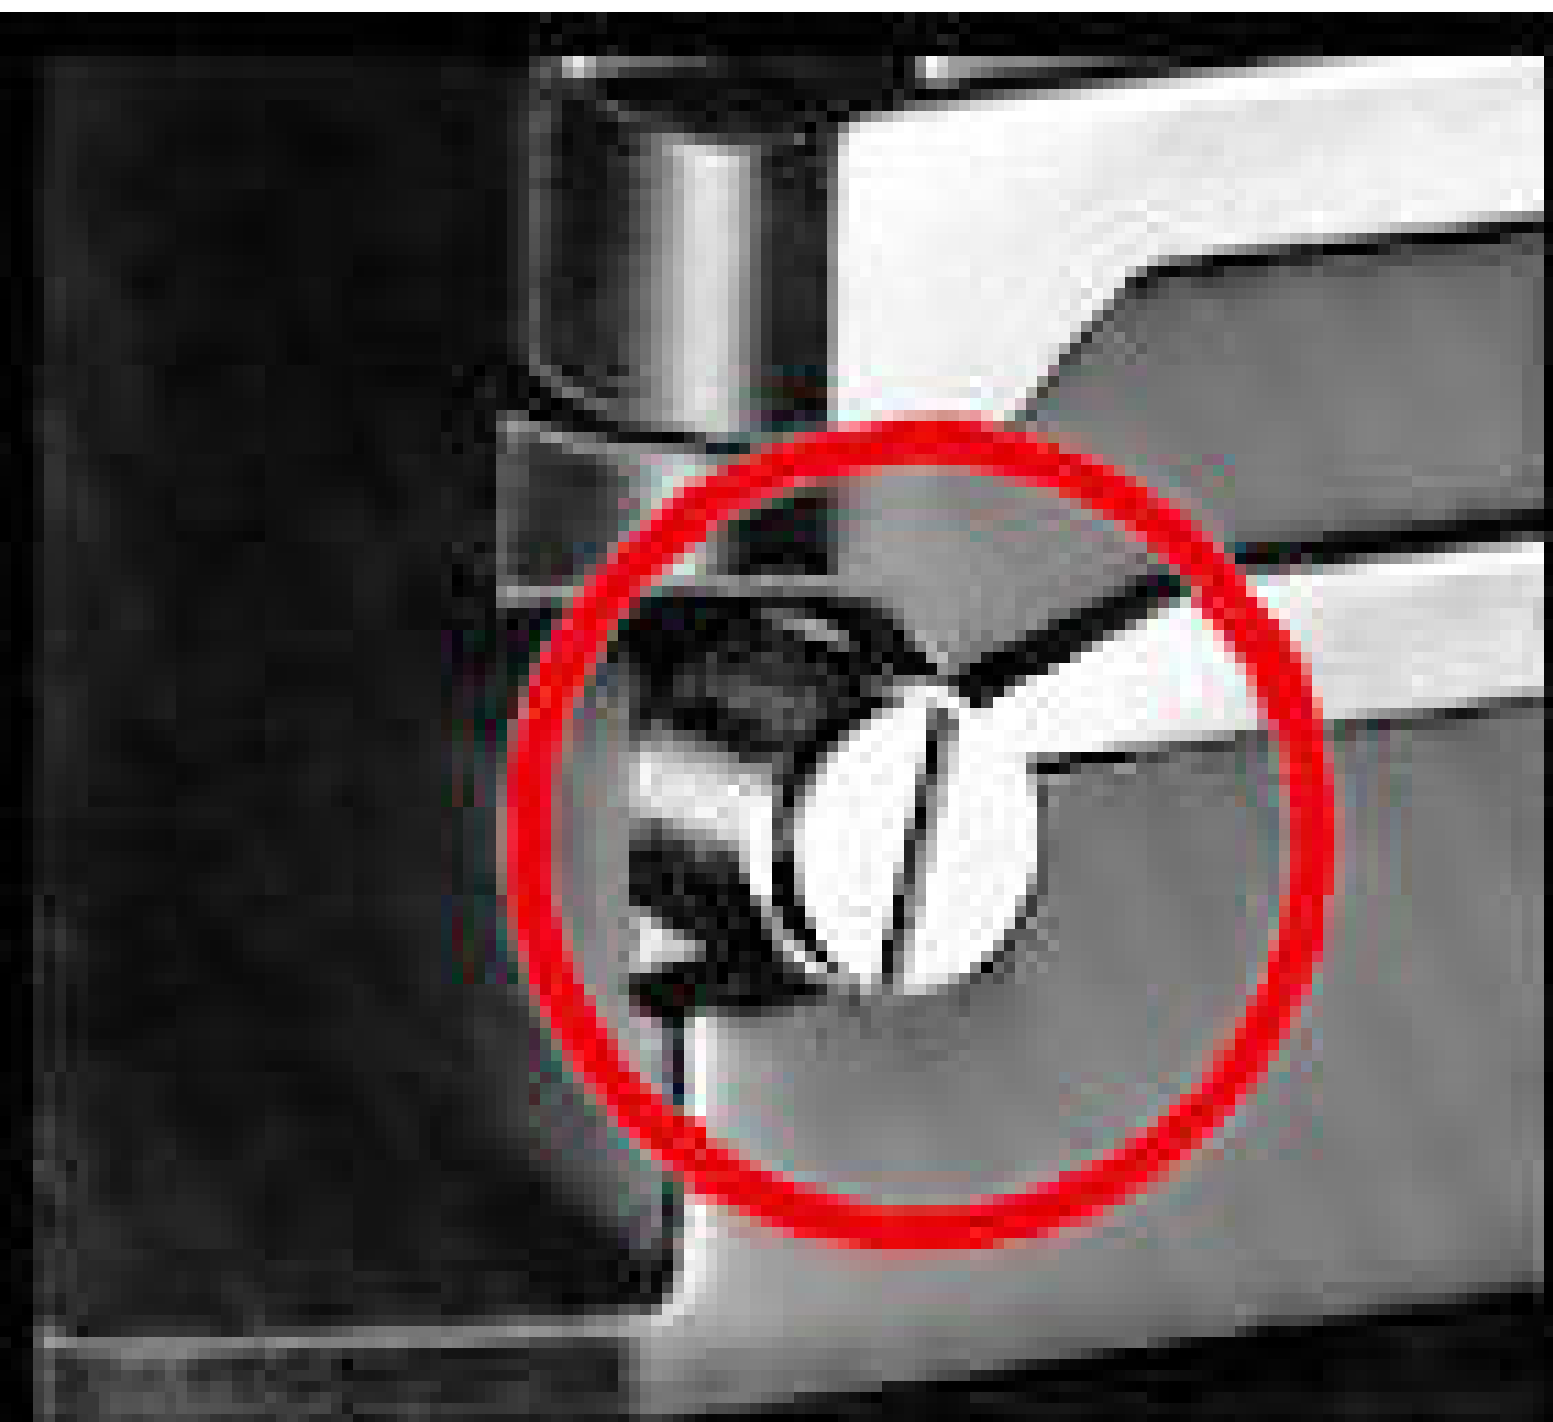


Film Guide Roller

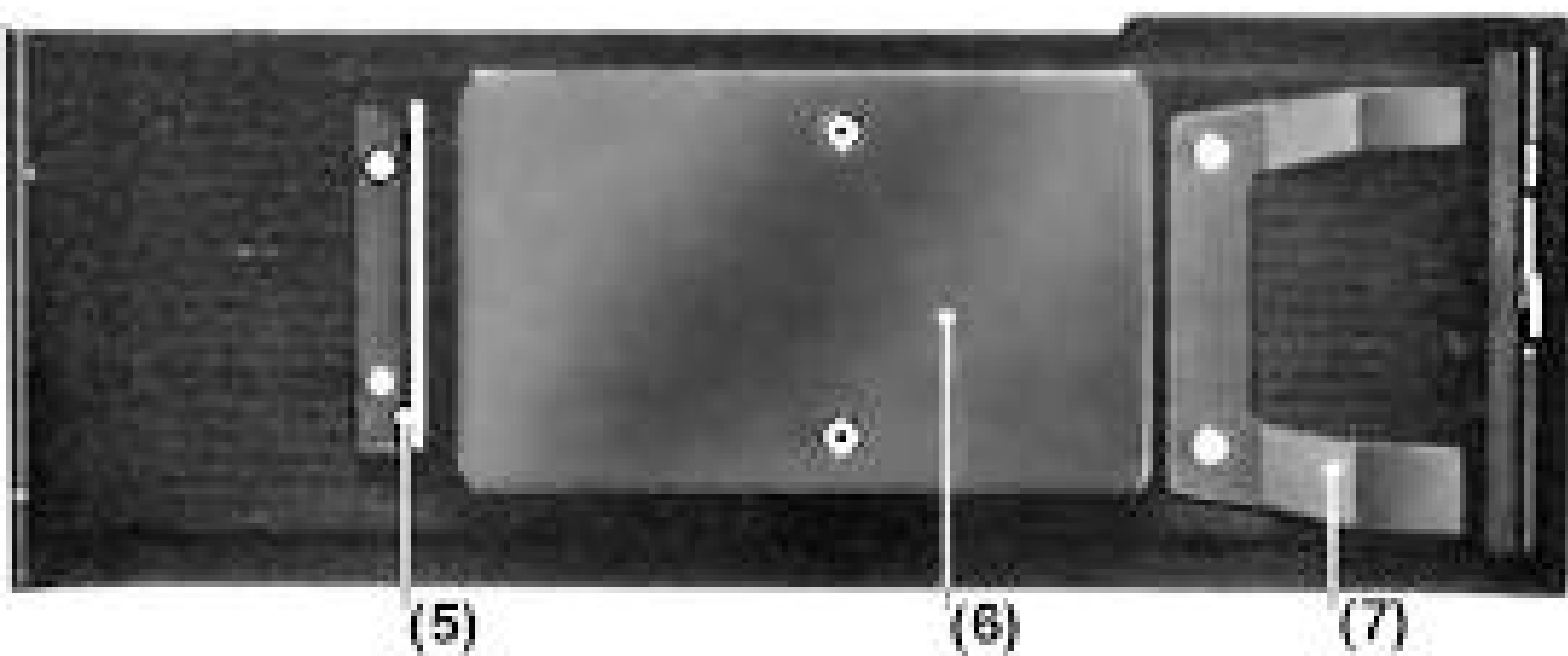

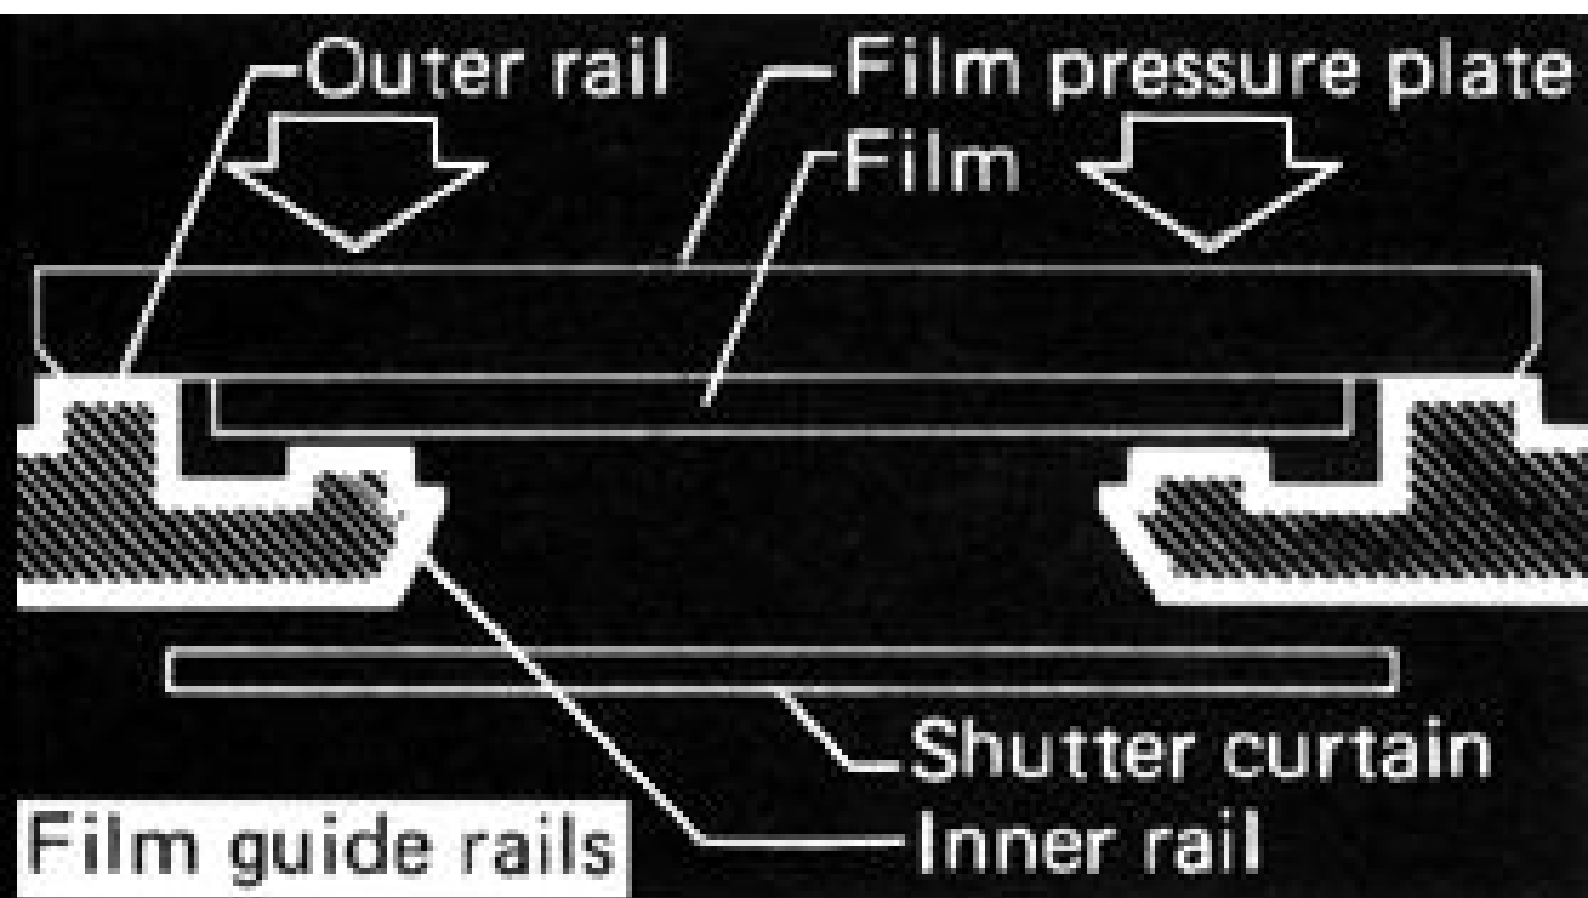



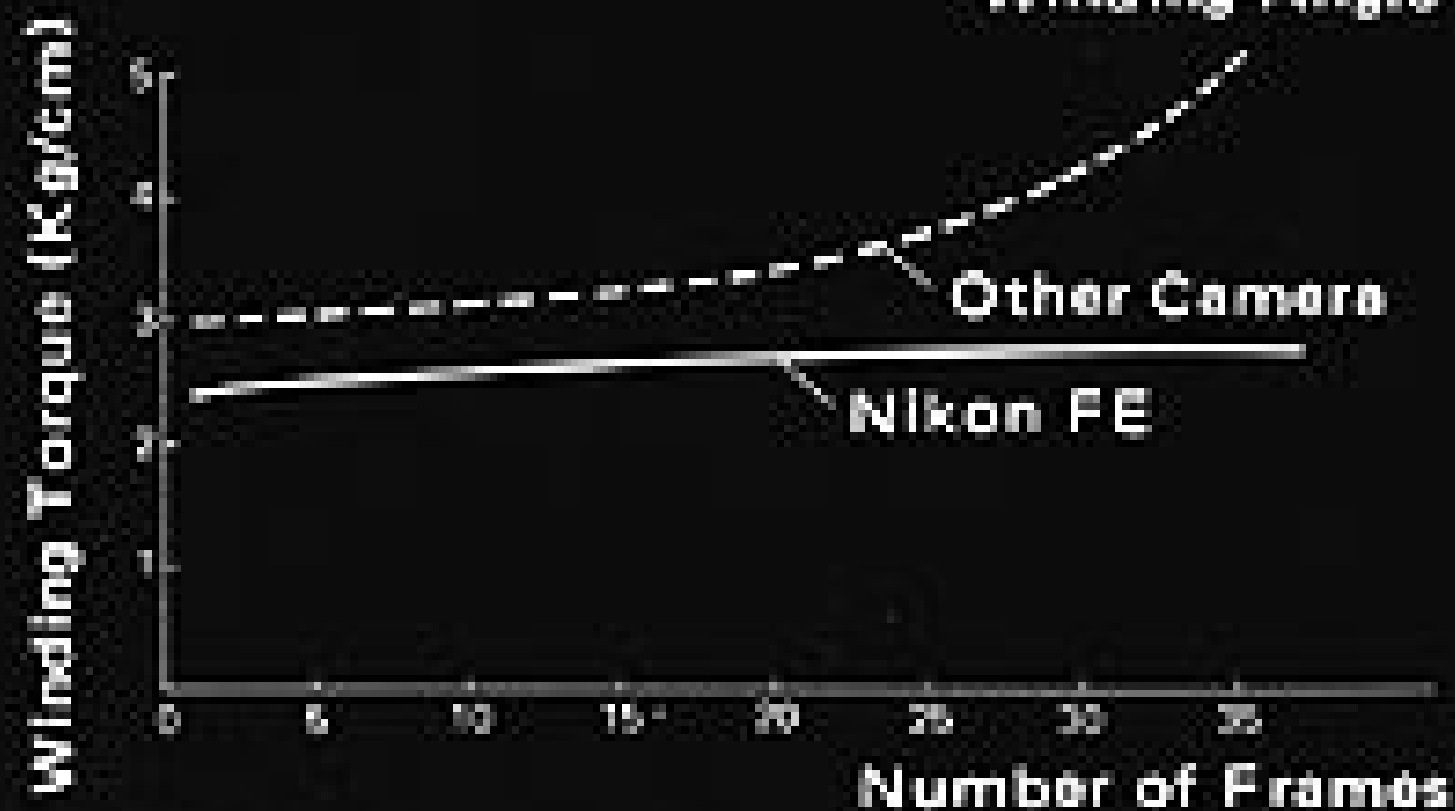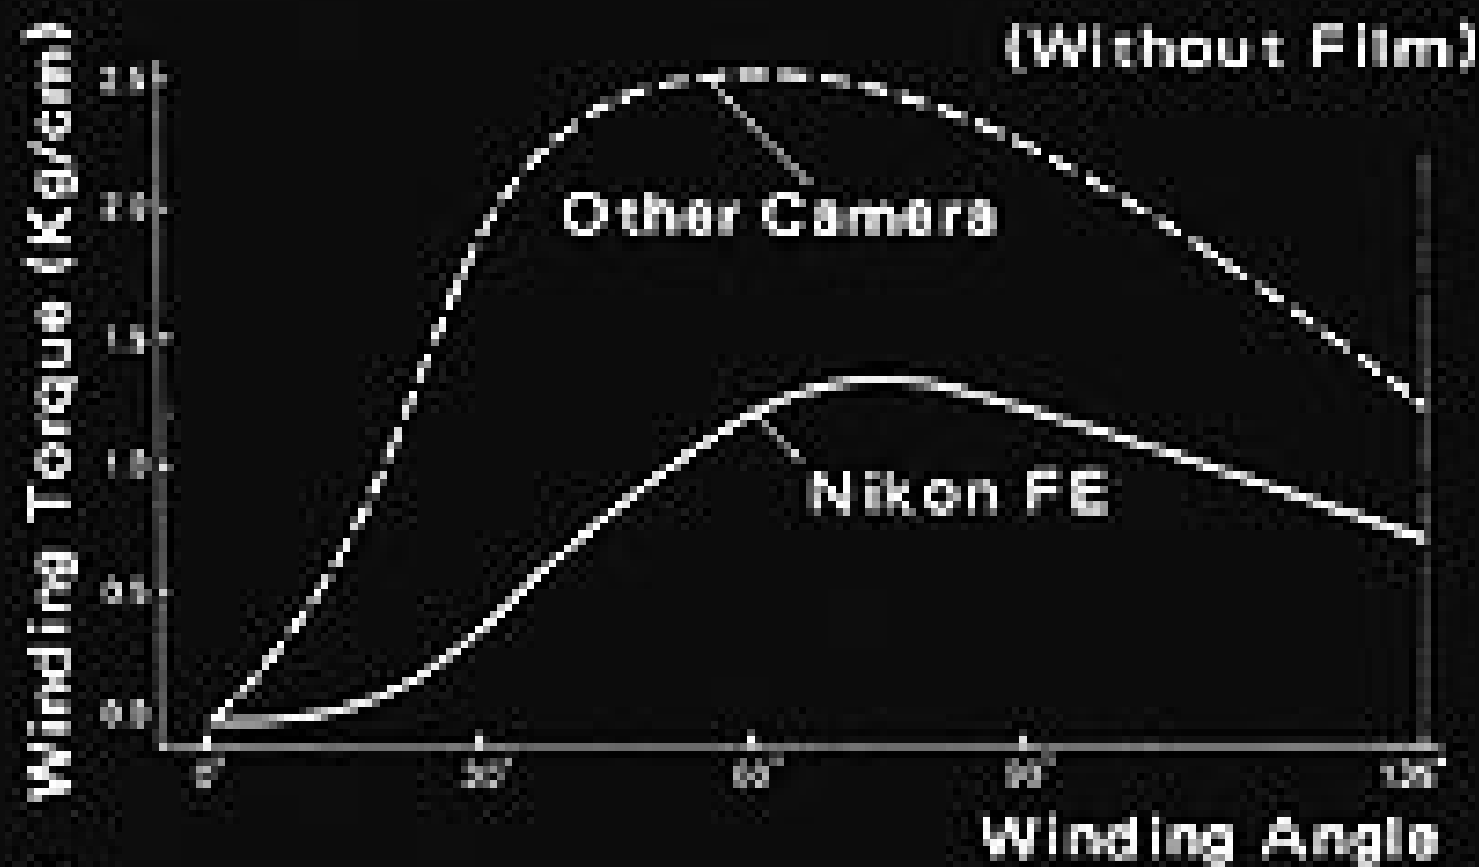










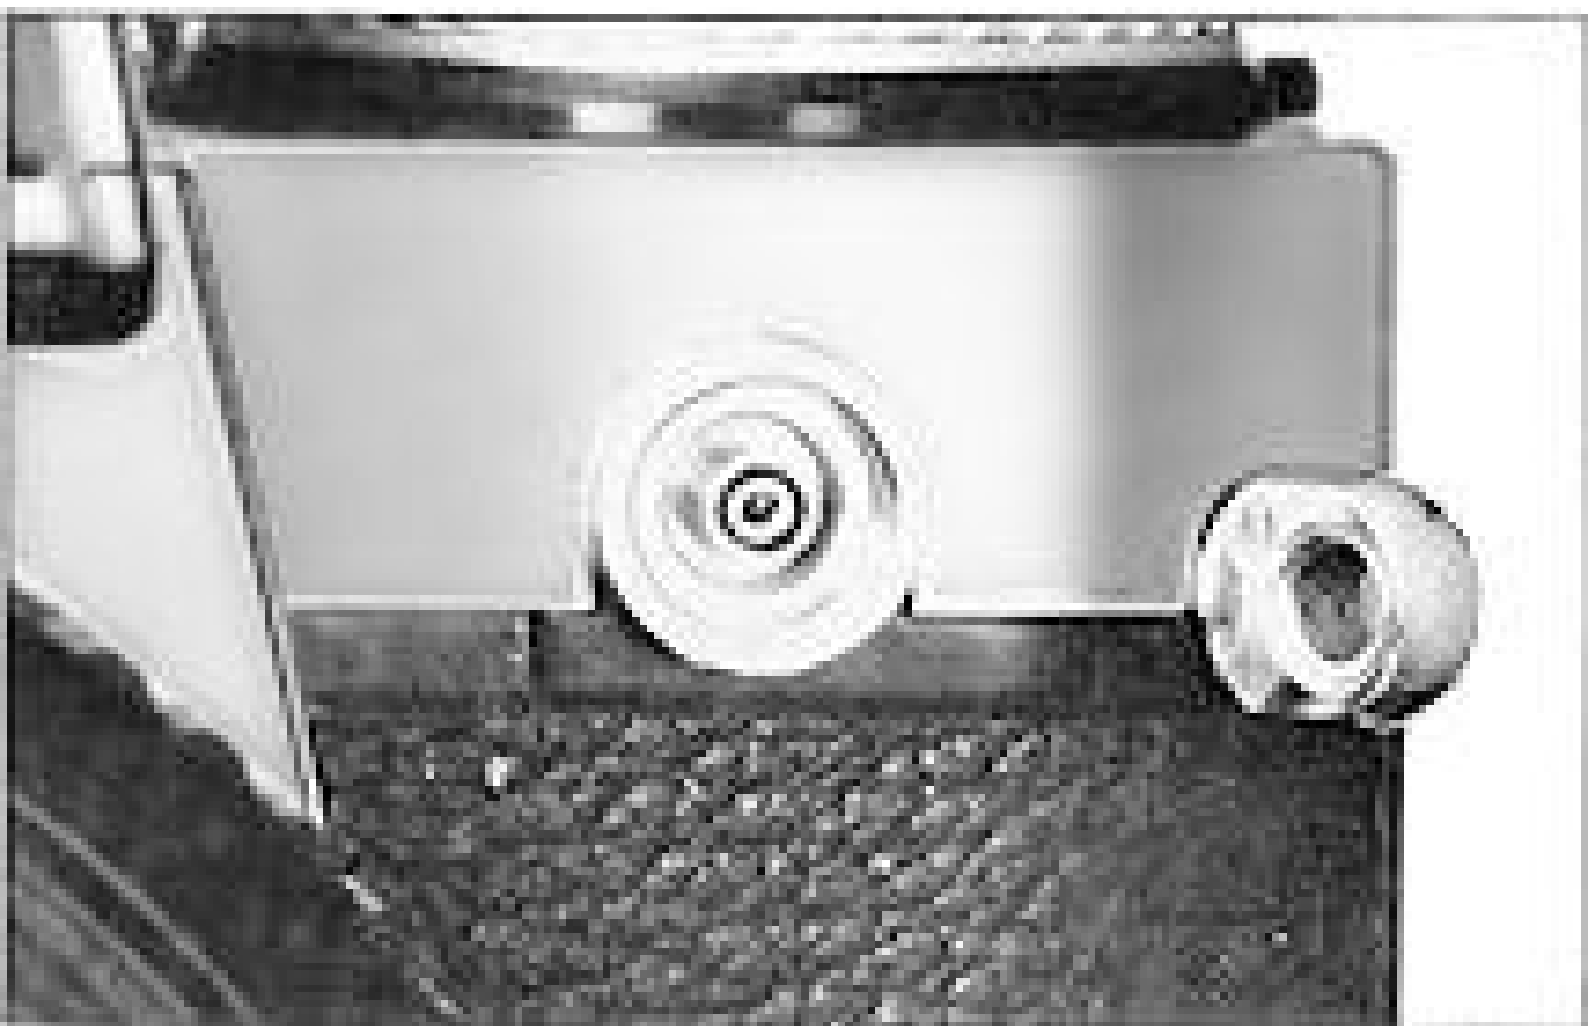


Flashbulb	Shutter speed (sec.)															
	1/1000	1/500	1/250	1/125	1/60	1/30	1/15	1/8	1/4	1/2	1	2	4	8	M90	B
Speedlight																
FP																
M																
MF																

 Synchronized
  Cannot be used





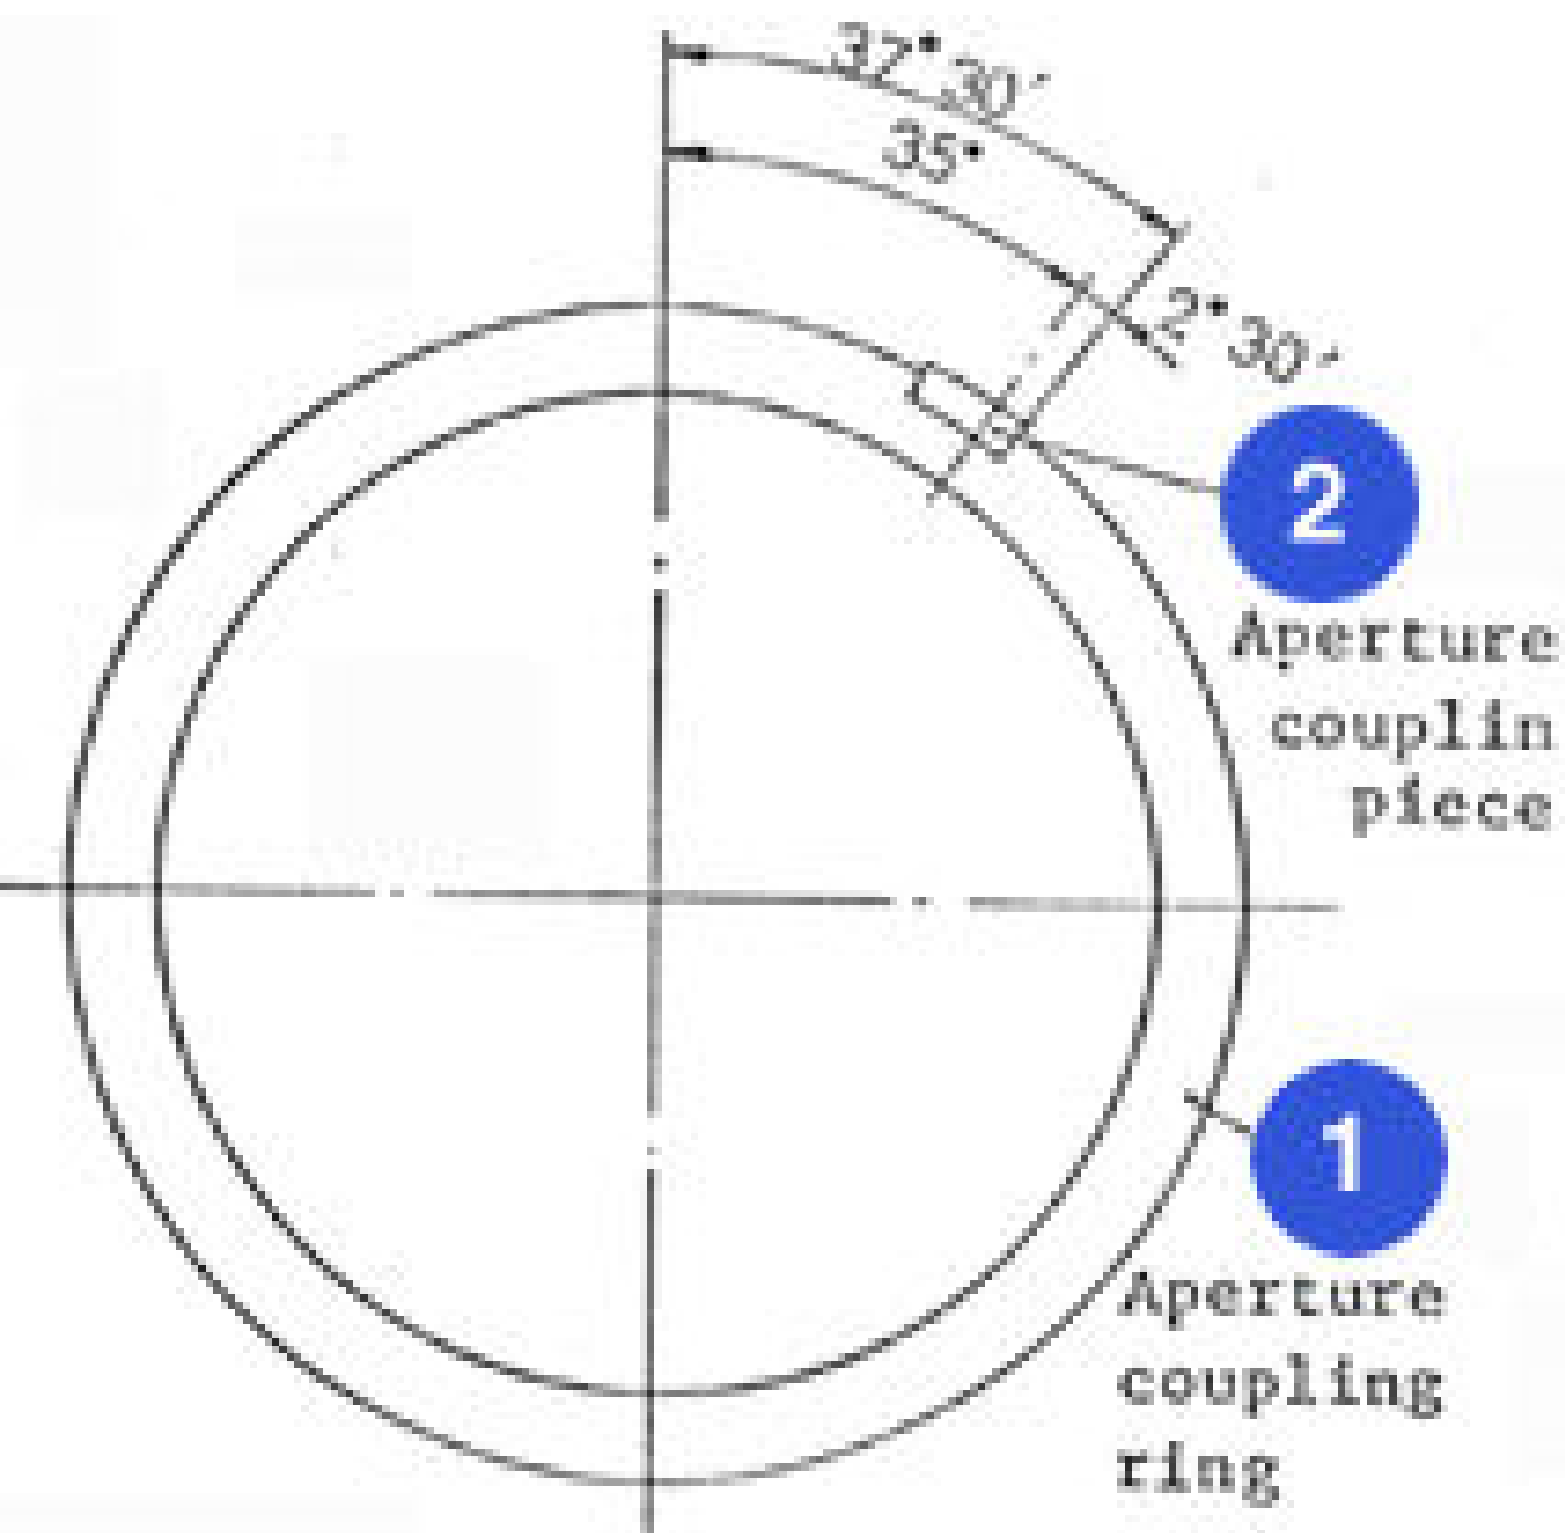


Operational Sequences


Lens Aperture Ring




Compensation of 1/3 Stop

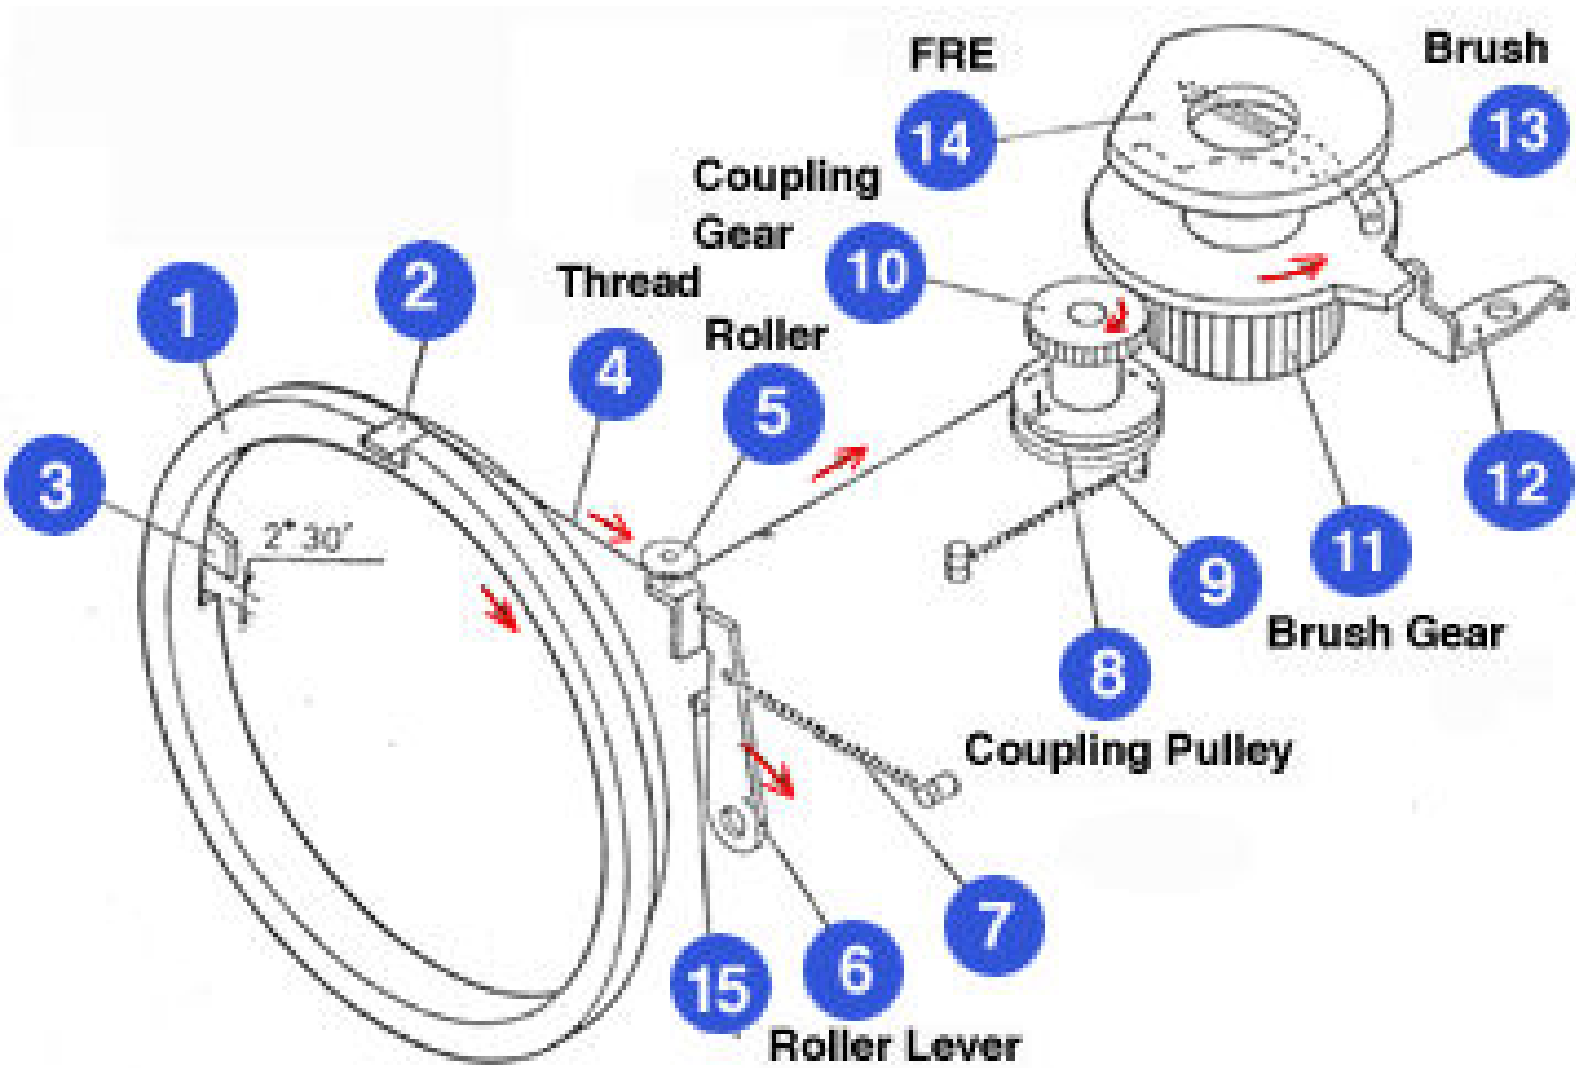

Exposure Control Circuitry System

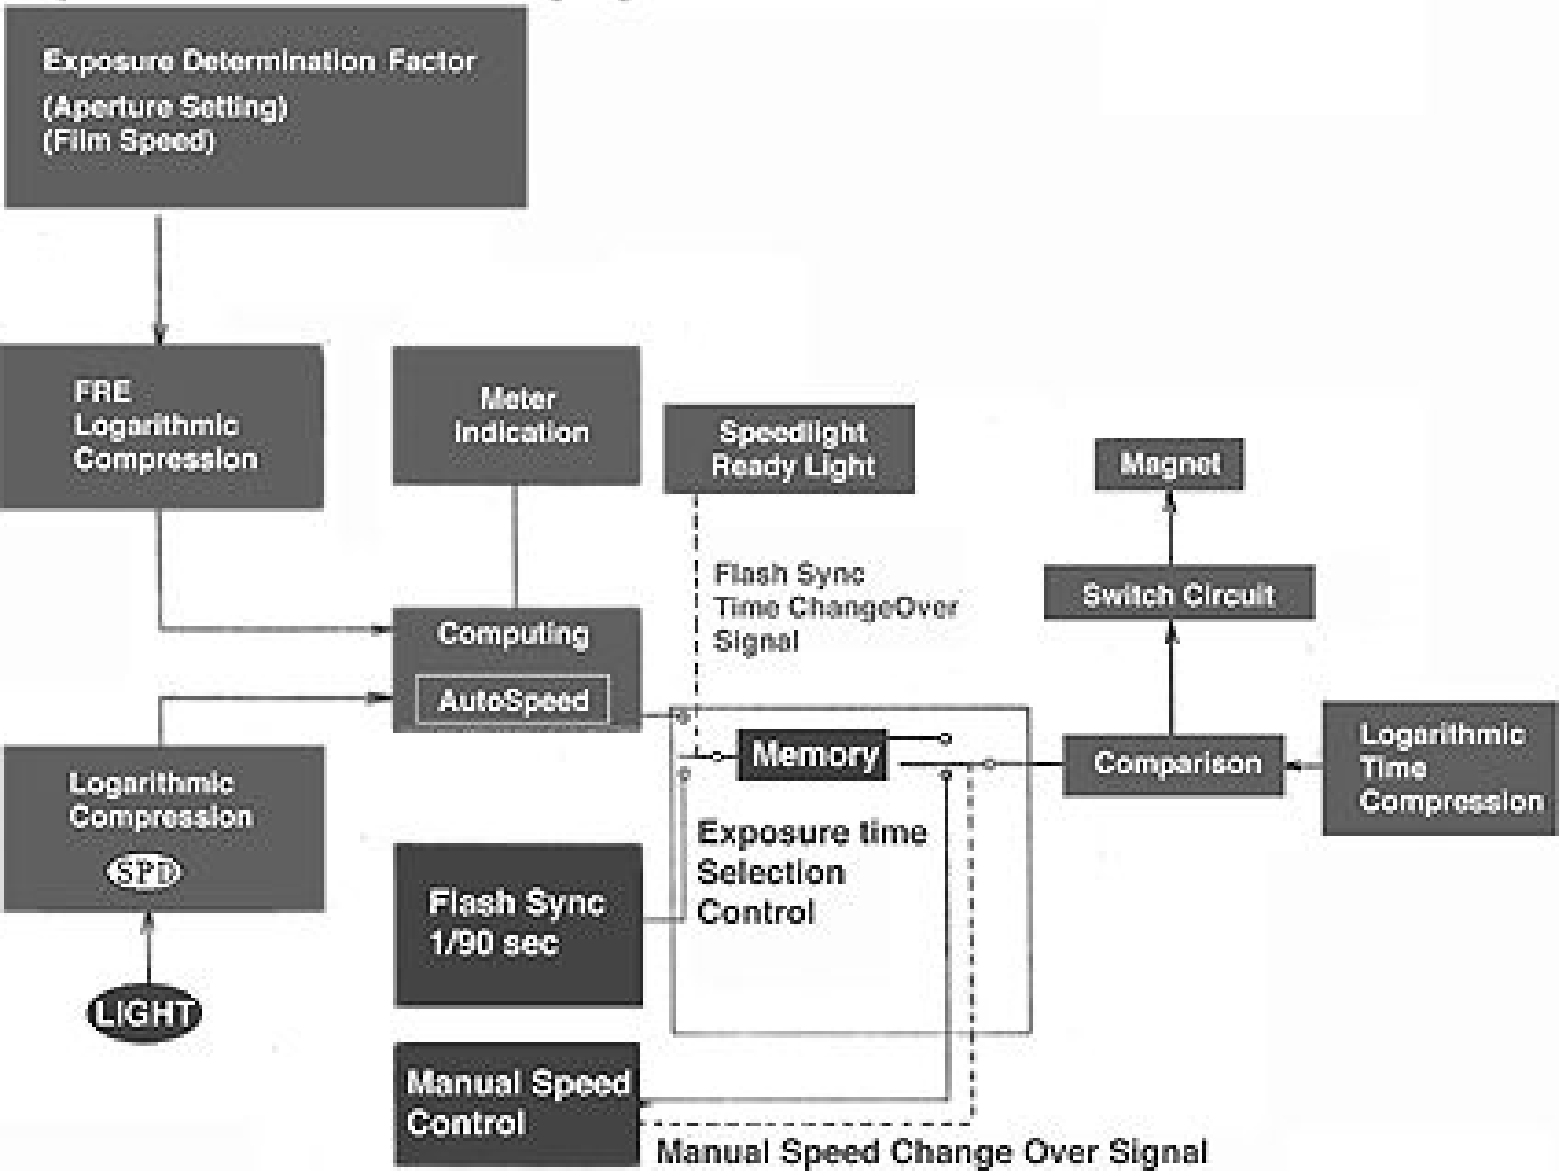

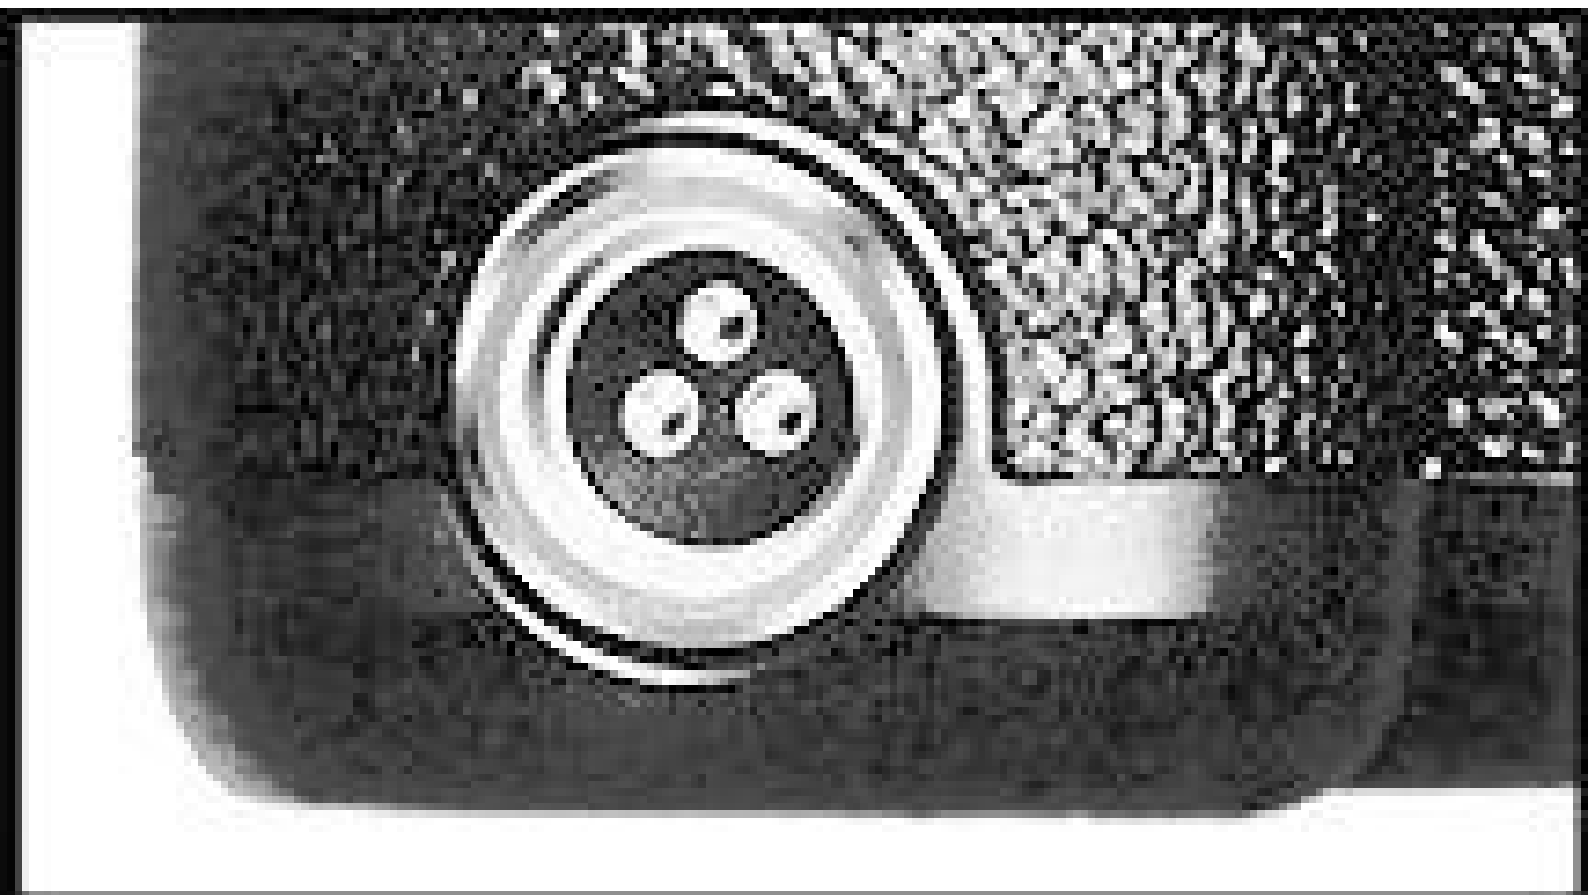











Distance
Scale

Aperture/Distance Scale Index

Focusing
Ring


Meter
Coupling
Ridge

Aperture Ring

Meter Coupling
Shoe

Aperture Direct
Readout (ADR)
Scale


Aperture
Value

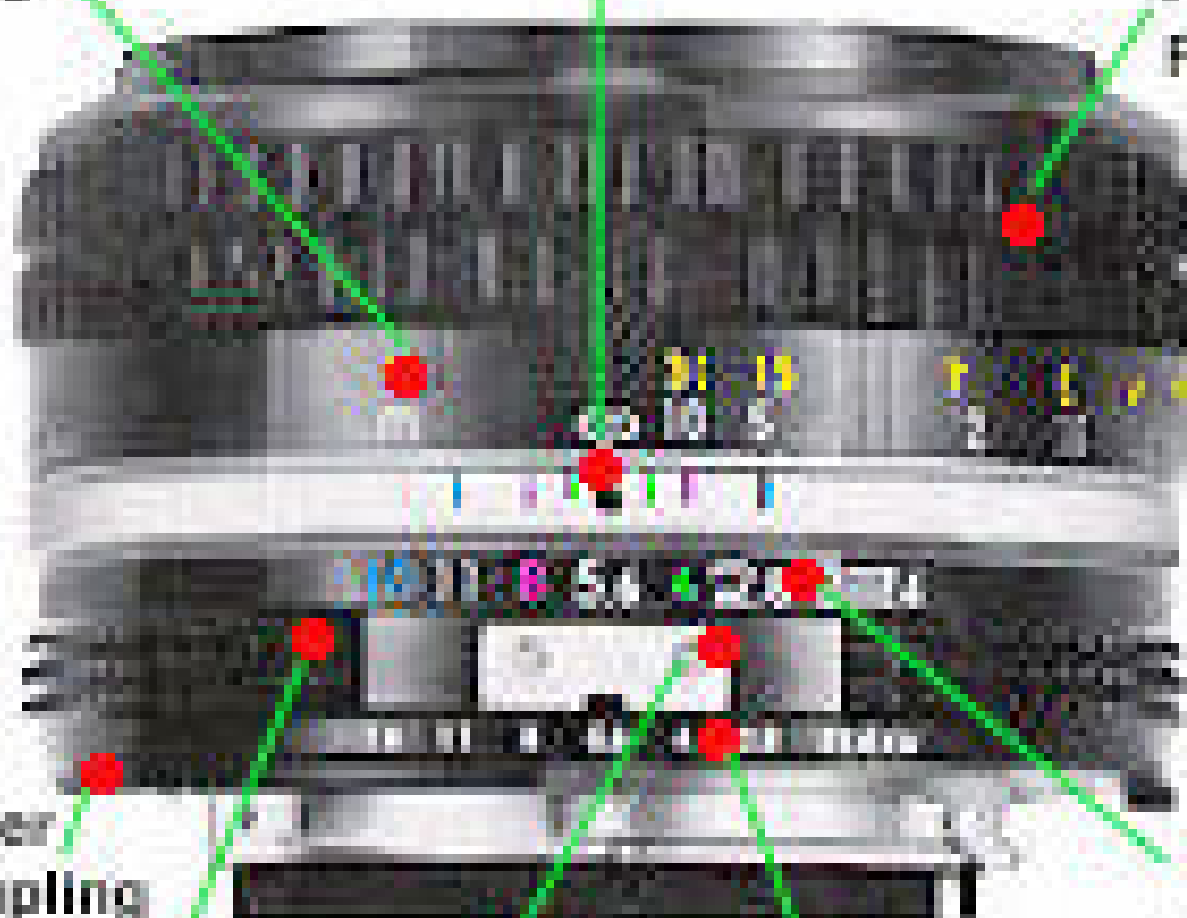








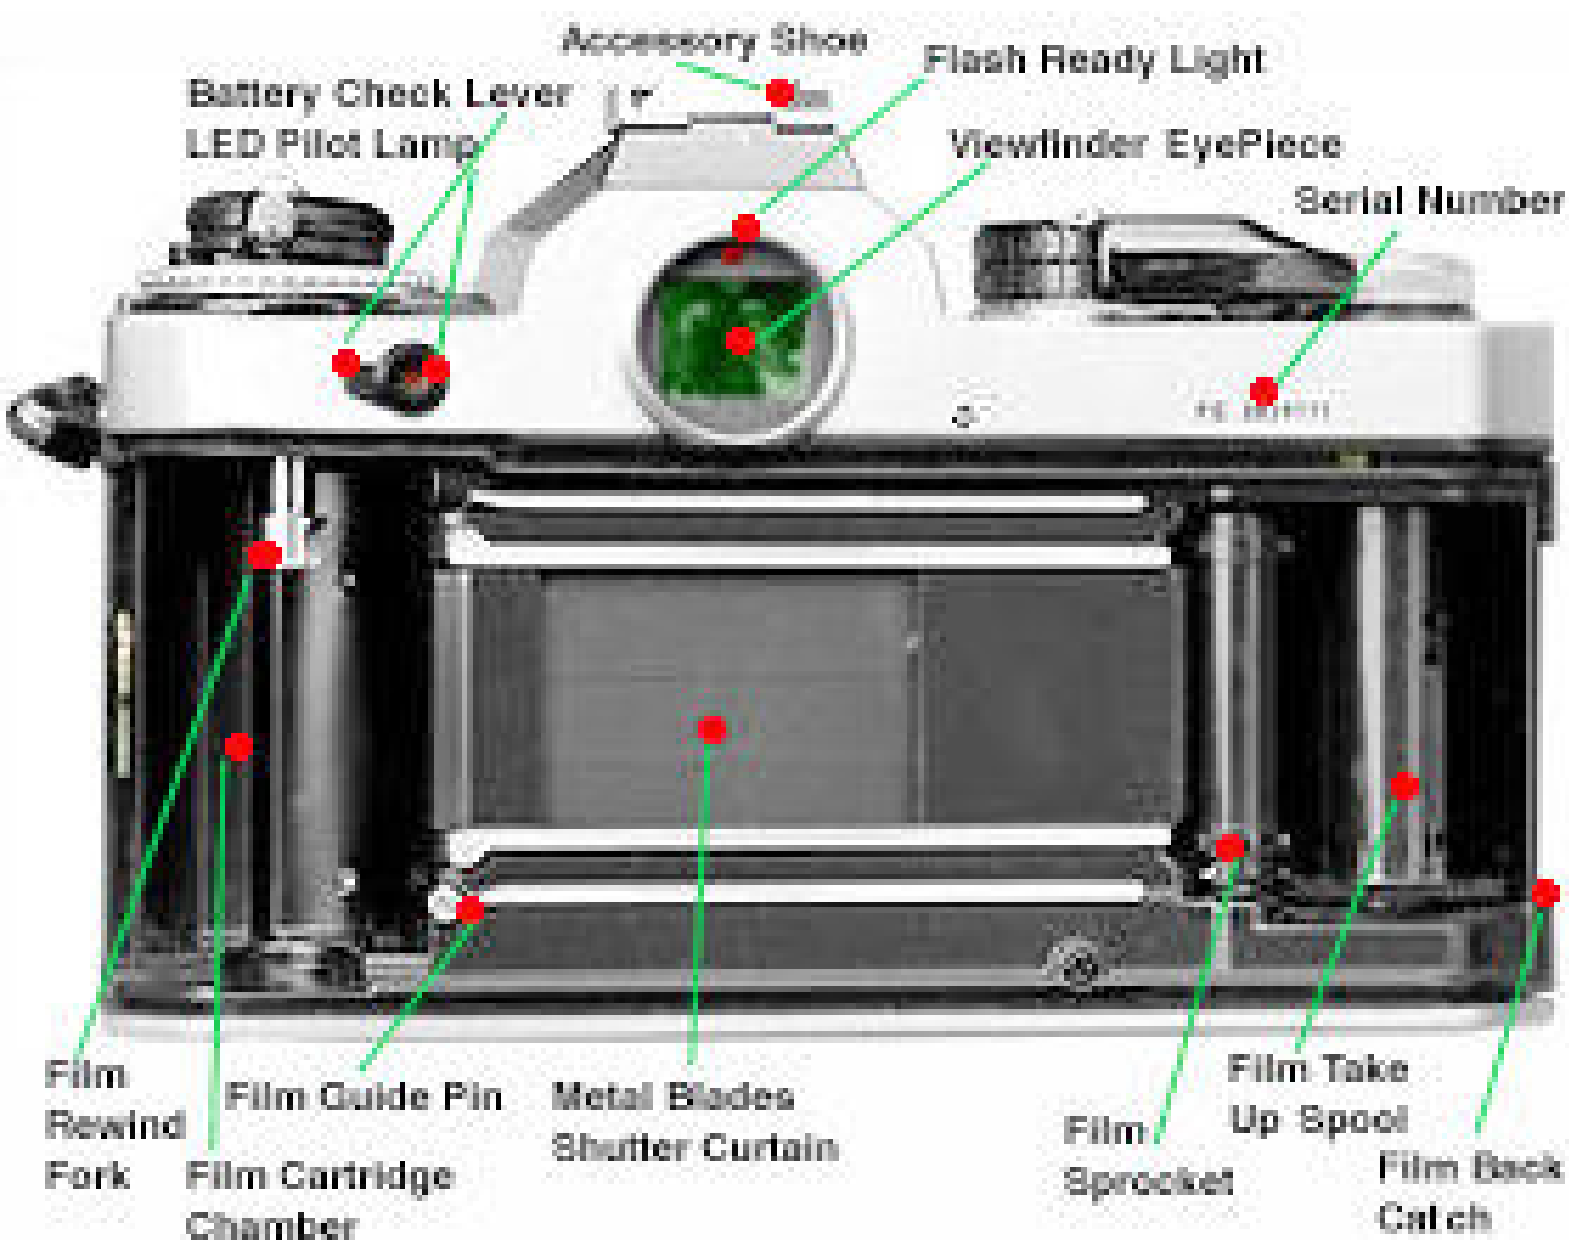




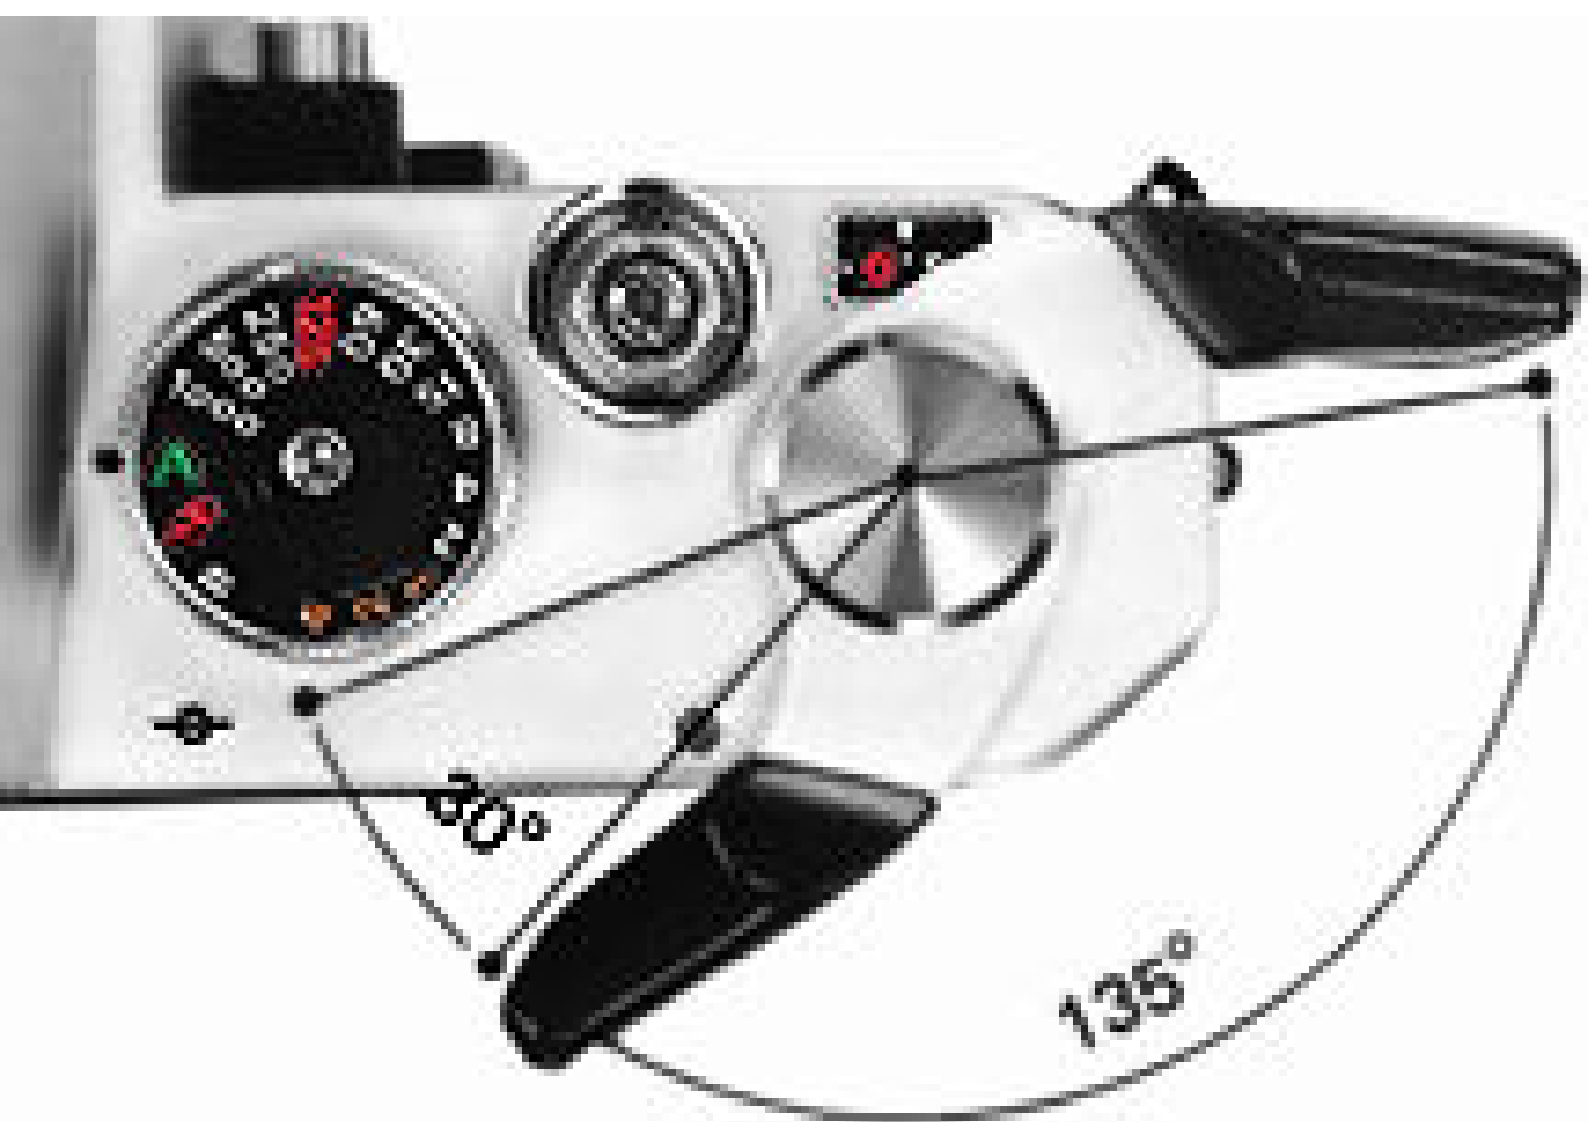





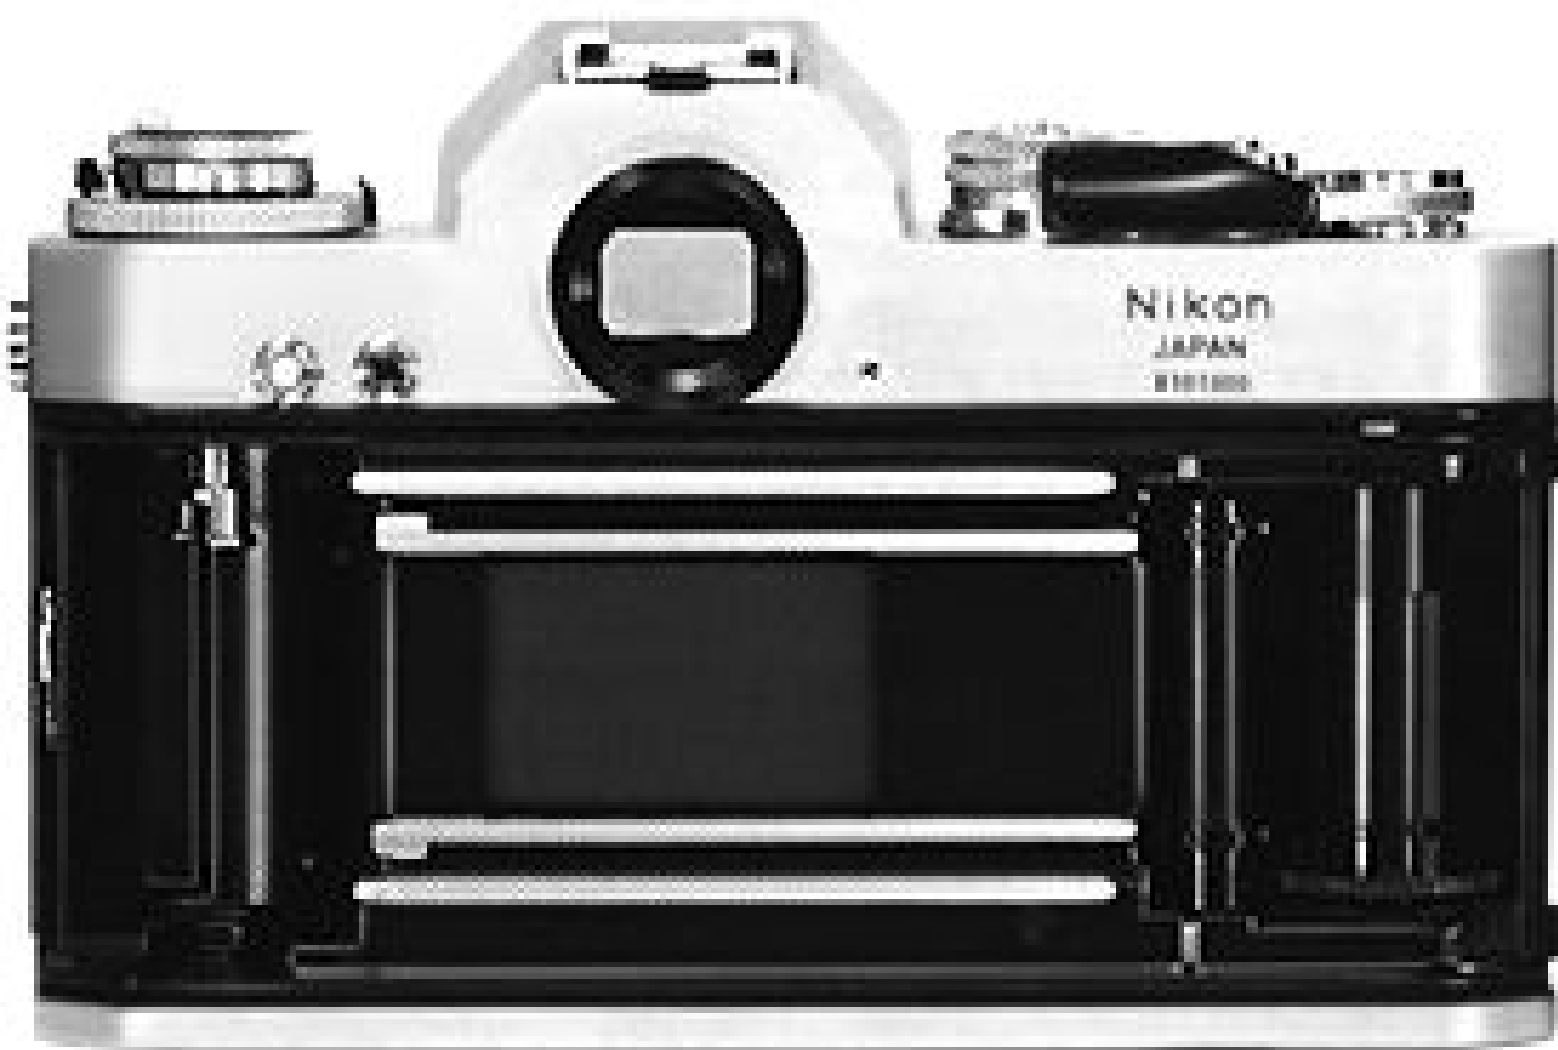





Last gapse of personal life before going on board, air stewardesses..
New Pudong International Airport, Shanghai China. 03. 2005.



