




Hot-shoe

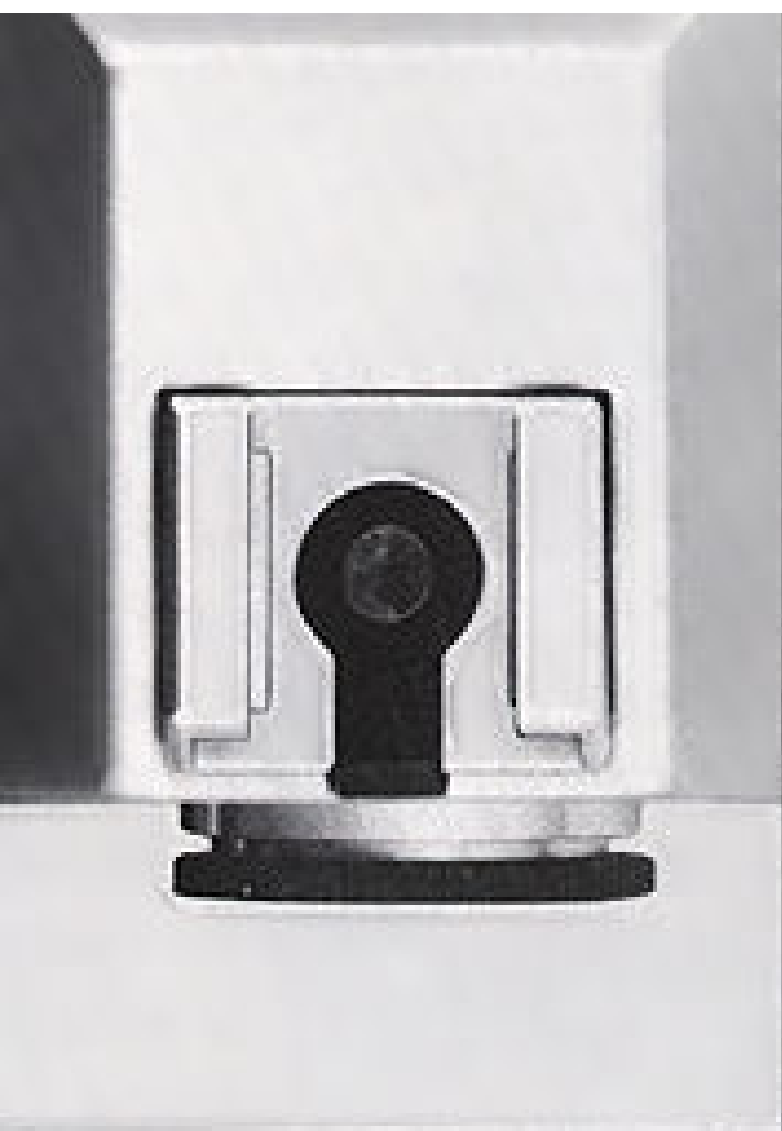

Threaded sync terminal

HI

FINE

NORMAL

BASIC

QUALITY

HIGH


NT



Flashbulb	Shutter speed (sec.)														
	1/1000	1/500	1/250	1/125	1/60	1/30	1/15	1/8	1/4	1/2	1	2	4	8	B
FP															
M	*	*													
MF															
Speedlight															

 Synchronized
  Cannot be used

*Some M class bulbs that have shorter flash duration may not cover these speeds.

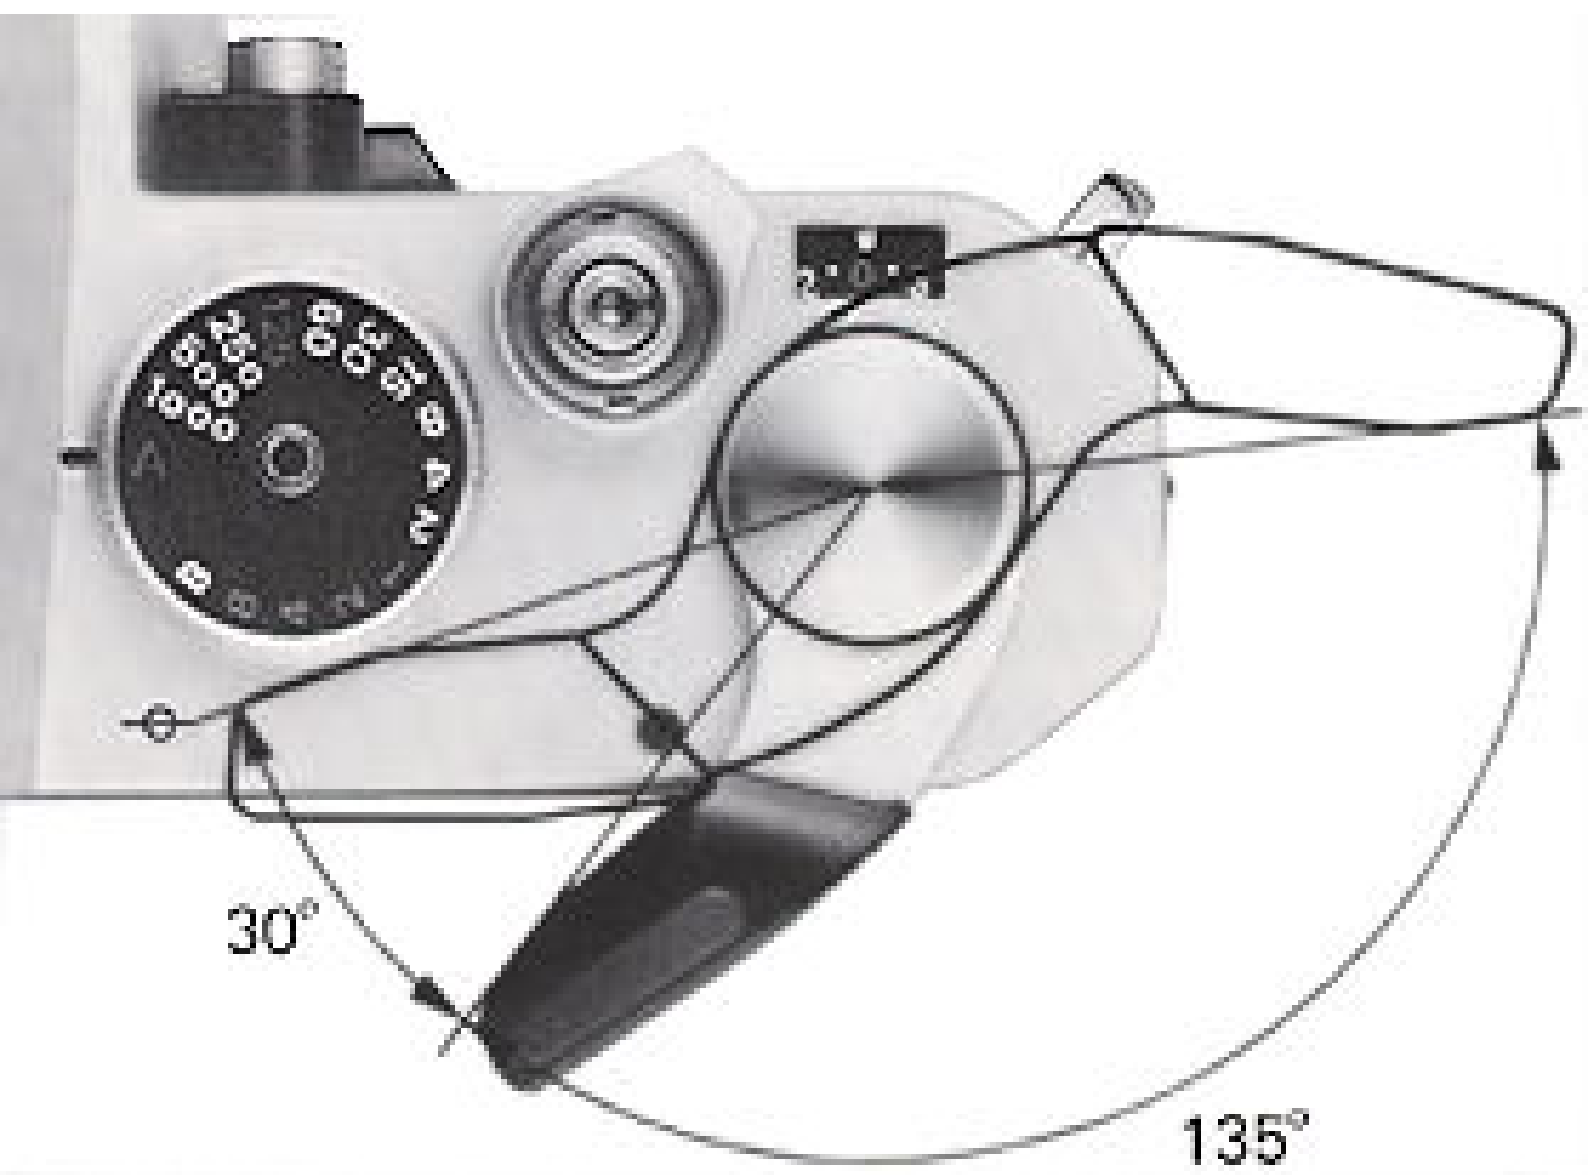











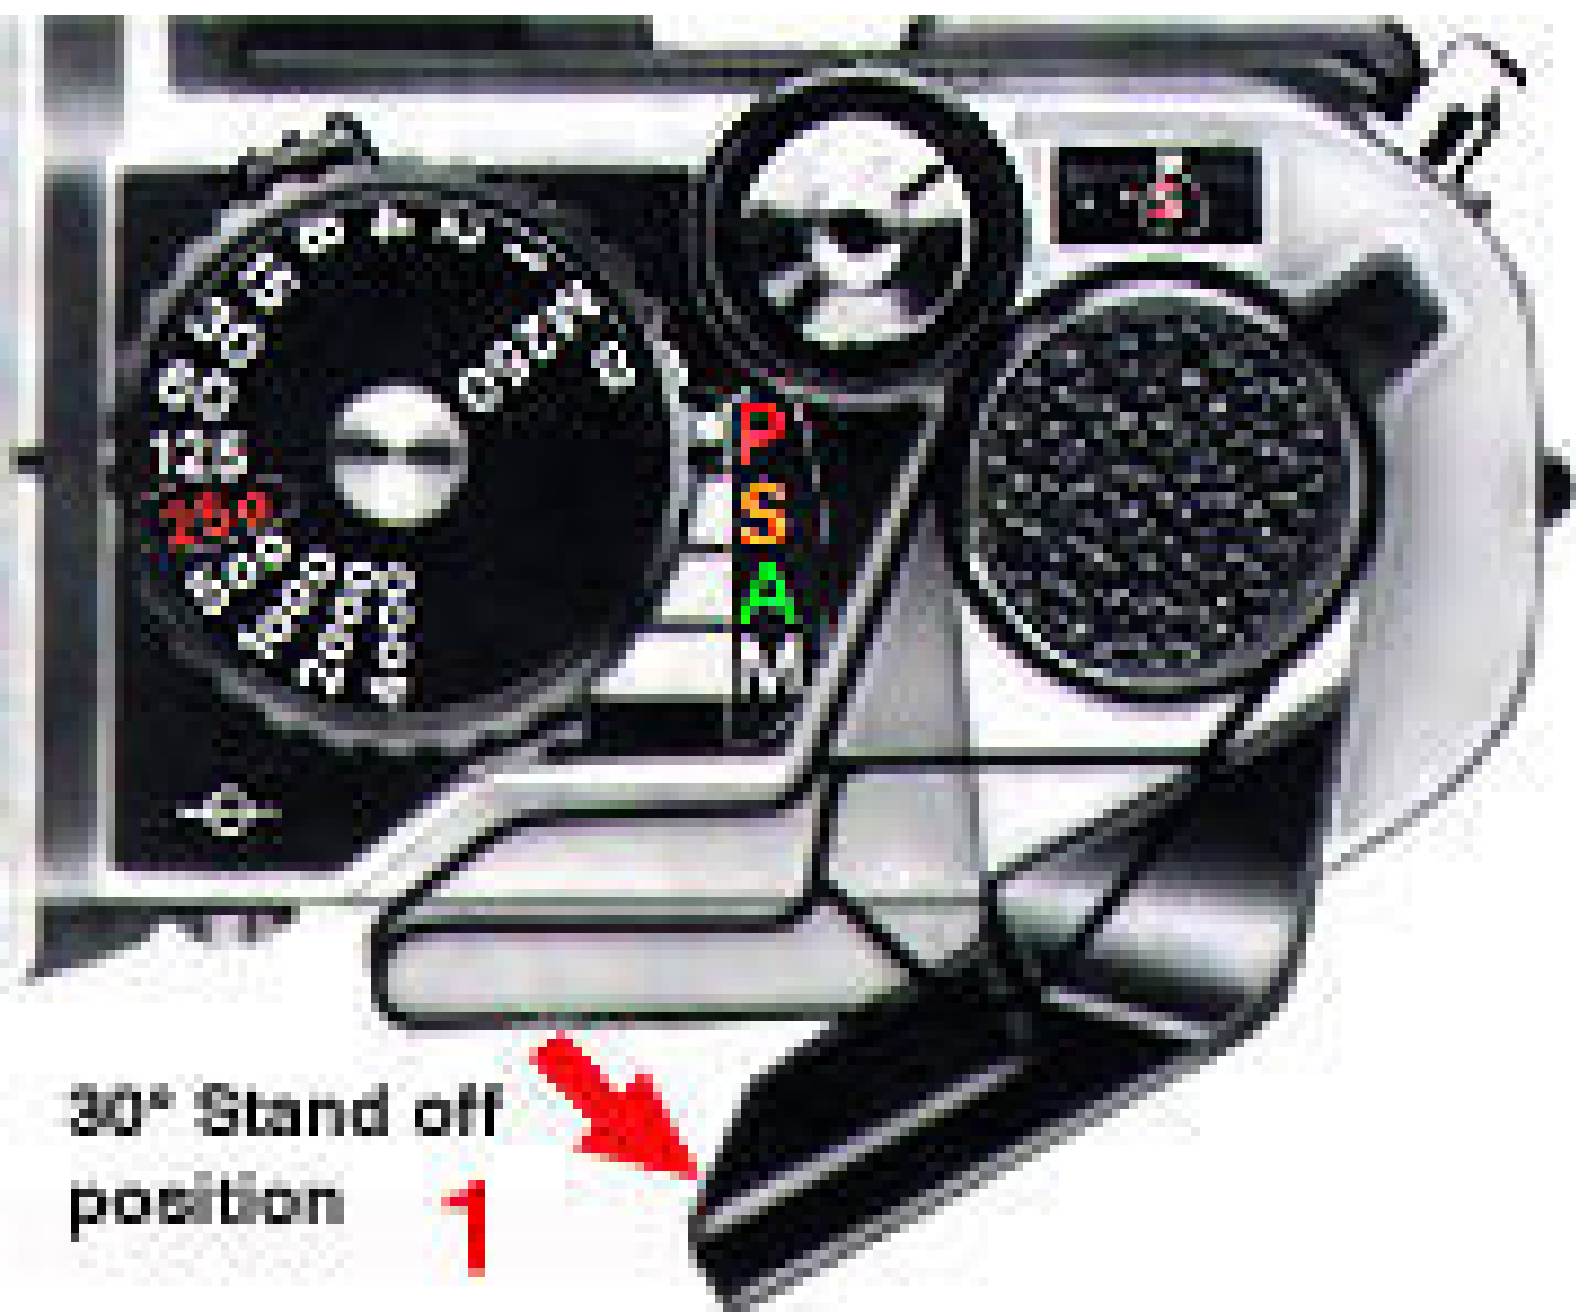

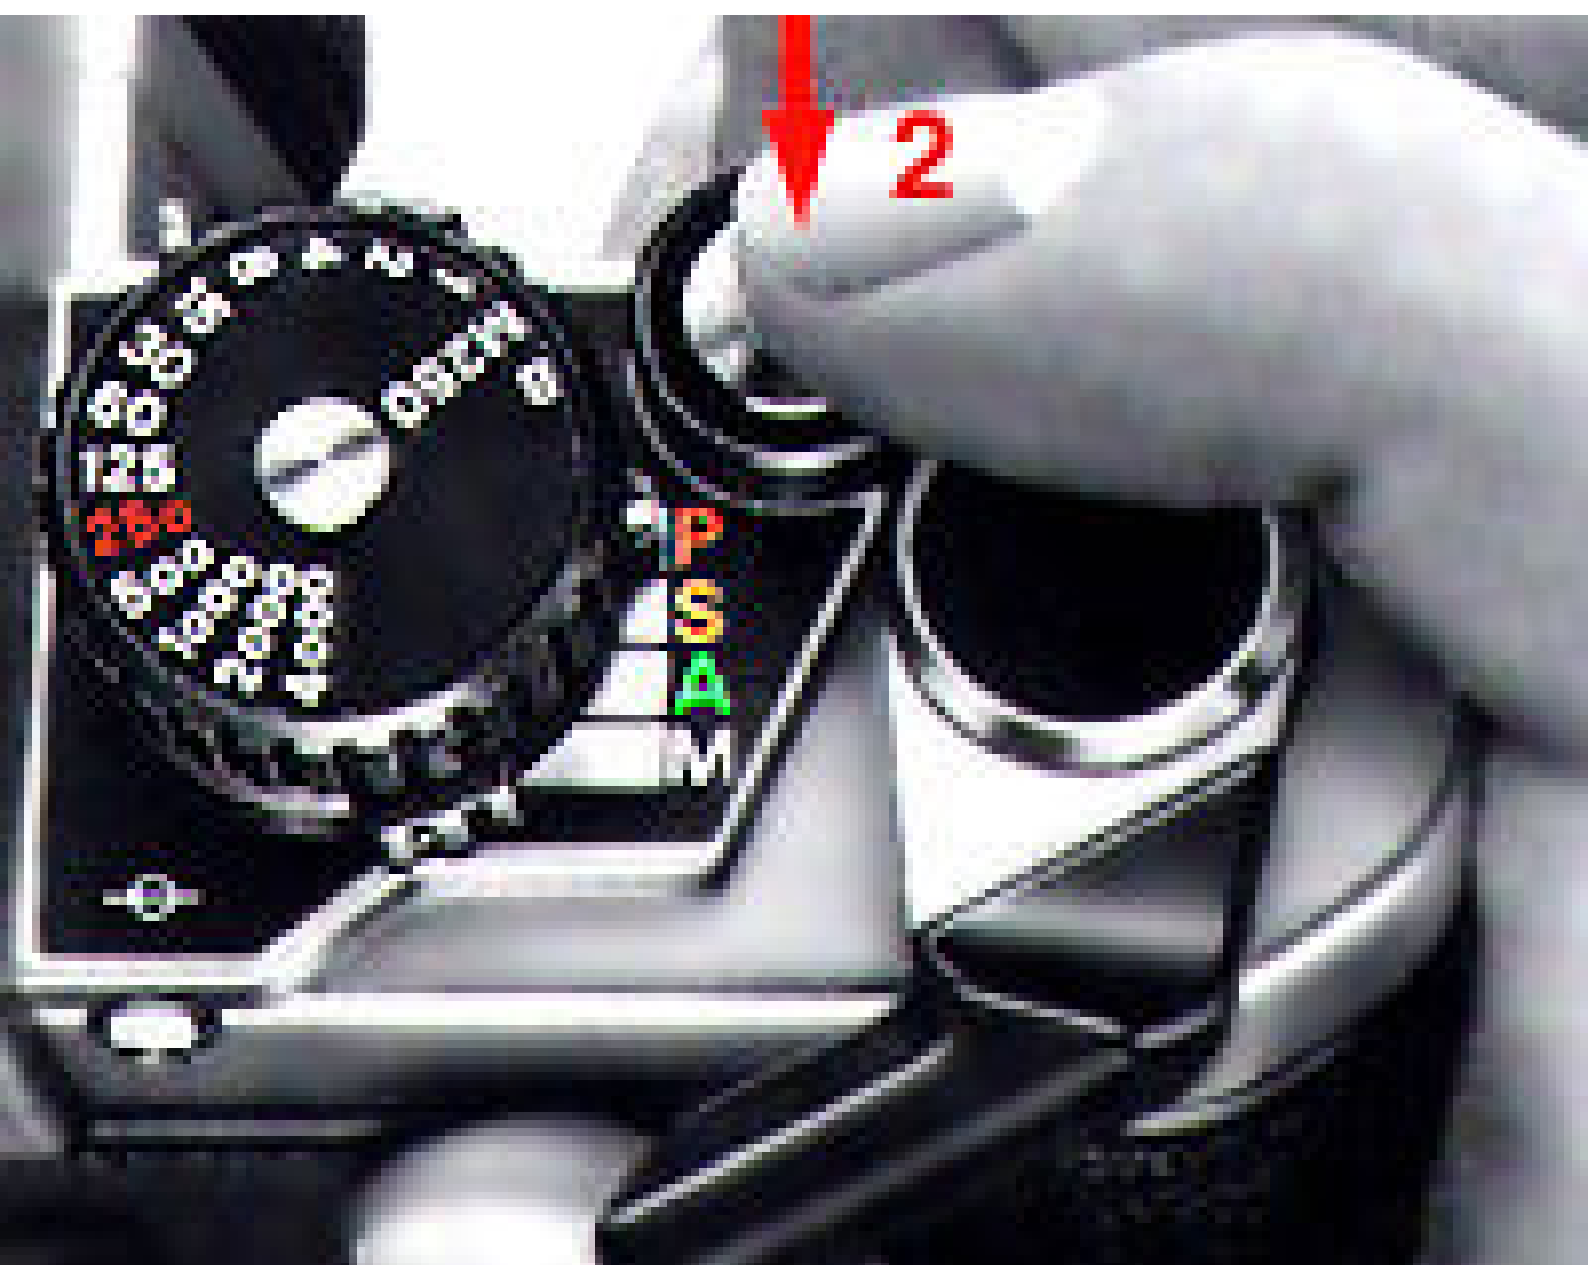

225

3









Nikon E2 Browser




Nikon

5 Images

04/21 10:45:05



04/21 10:45:10












04/21 10:45:15




04/21 10:45:20



04/21 10:45:25



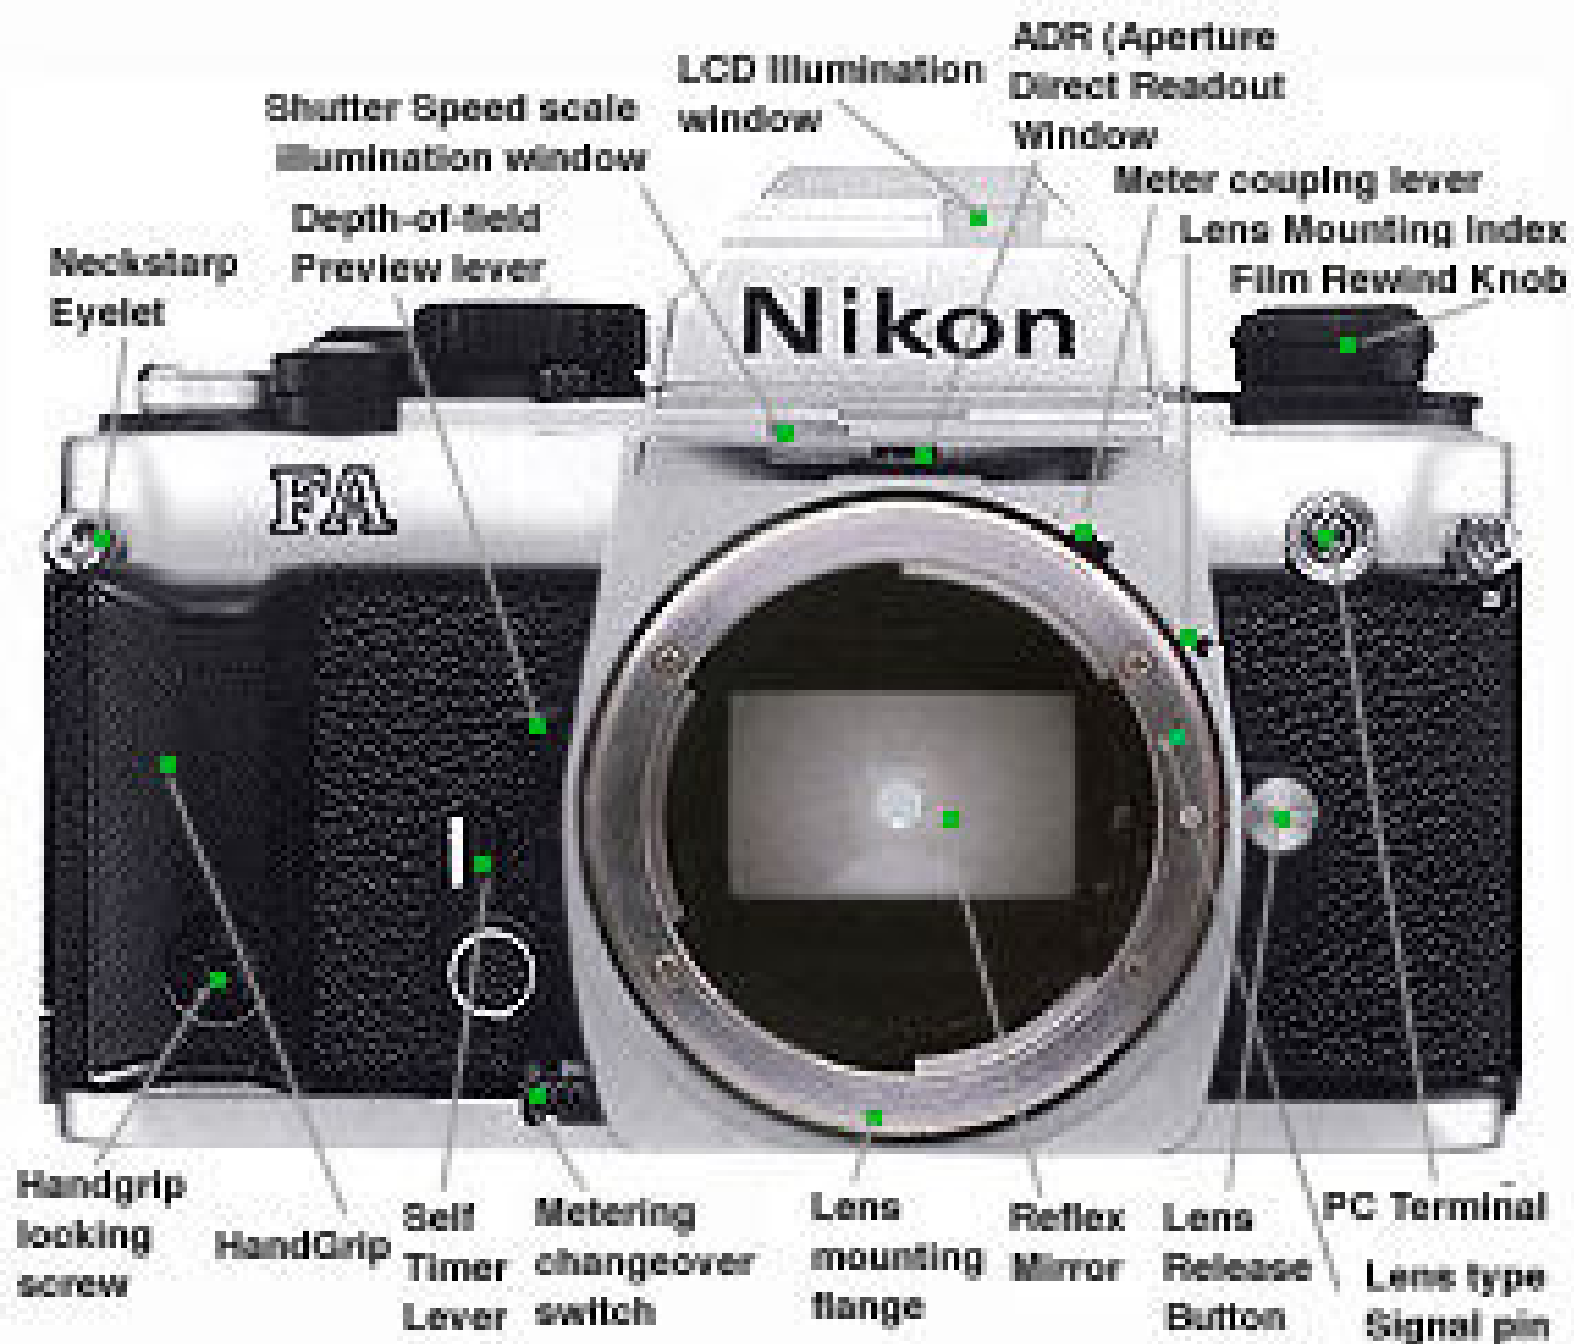





**Shutter Release
Coupling Pin**

**Battery
Chamber
Lid**

**Motor Drive
Coupling**

**Film Rewind
Button**

Tripod Socket

**Motor Drive
Electrical Contacts**




Nikon
PC CARD PAK
MC-100

1
2




1


2

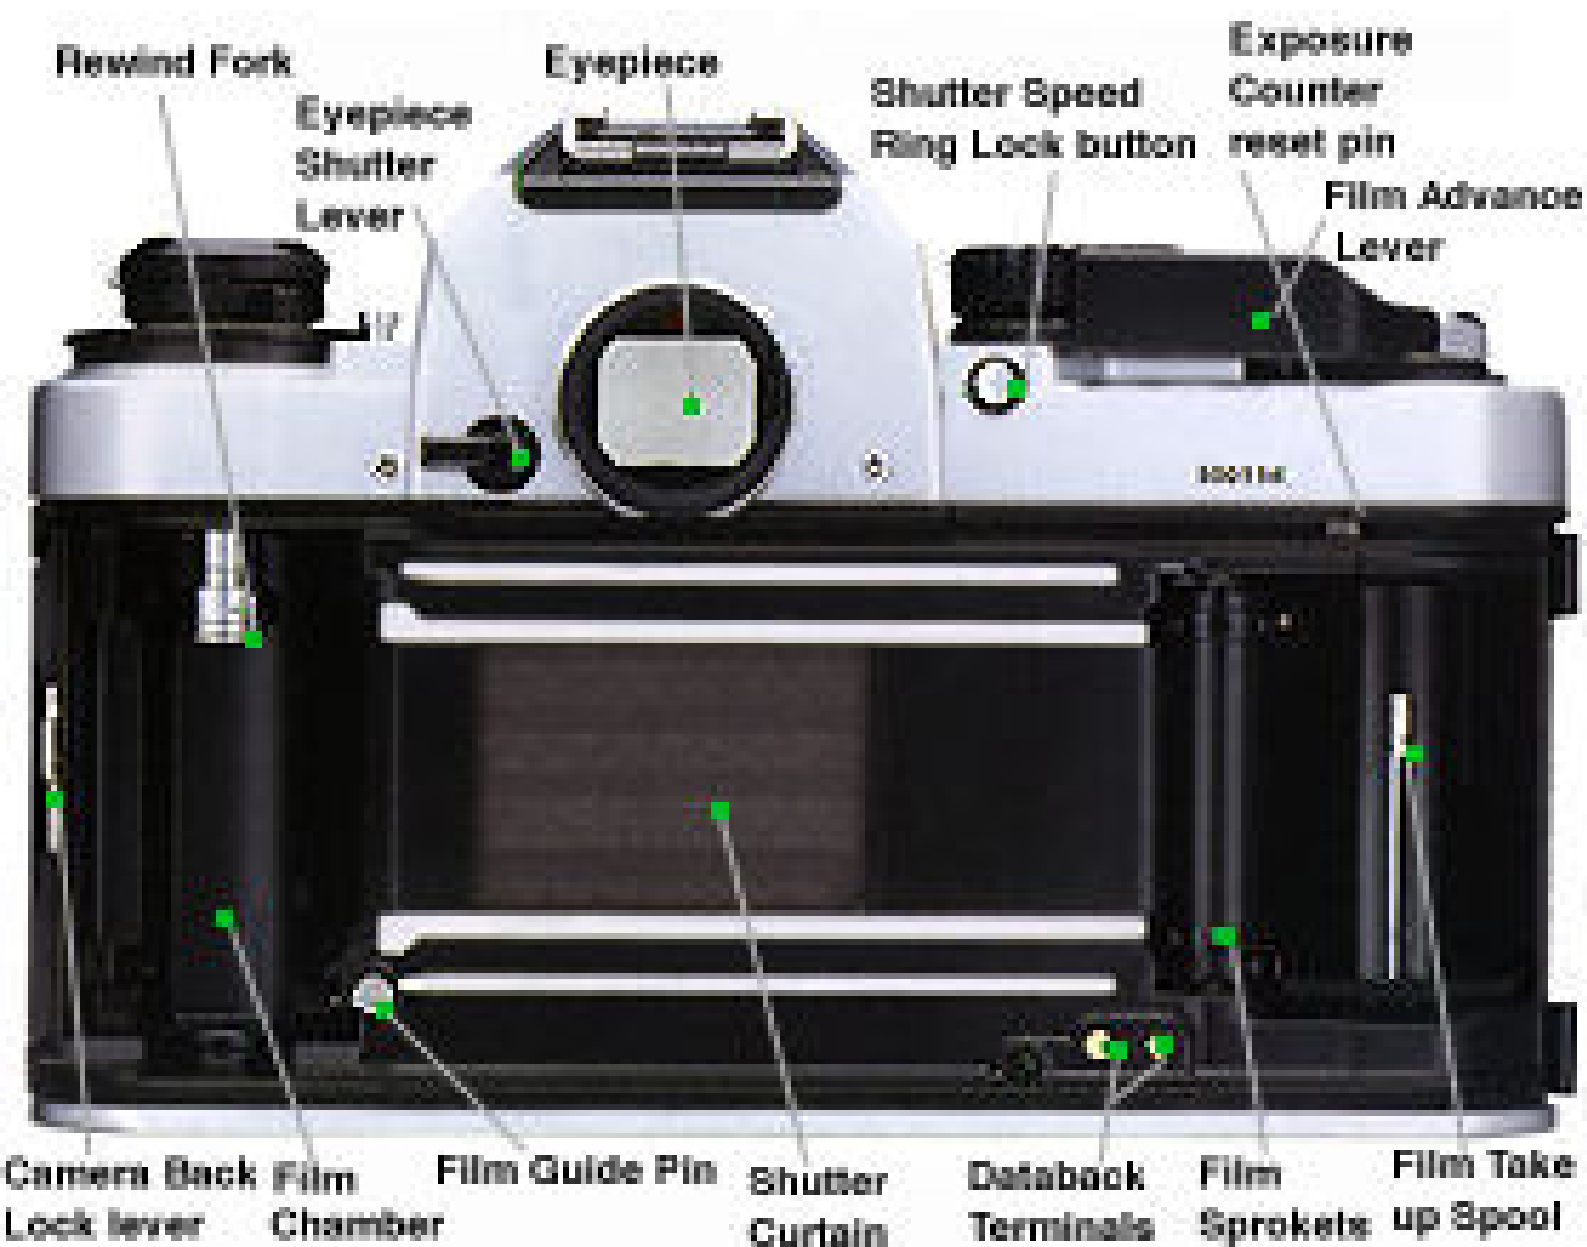





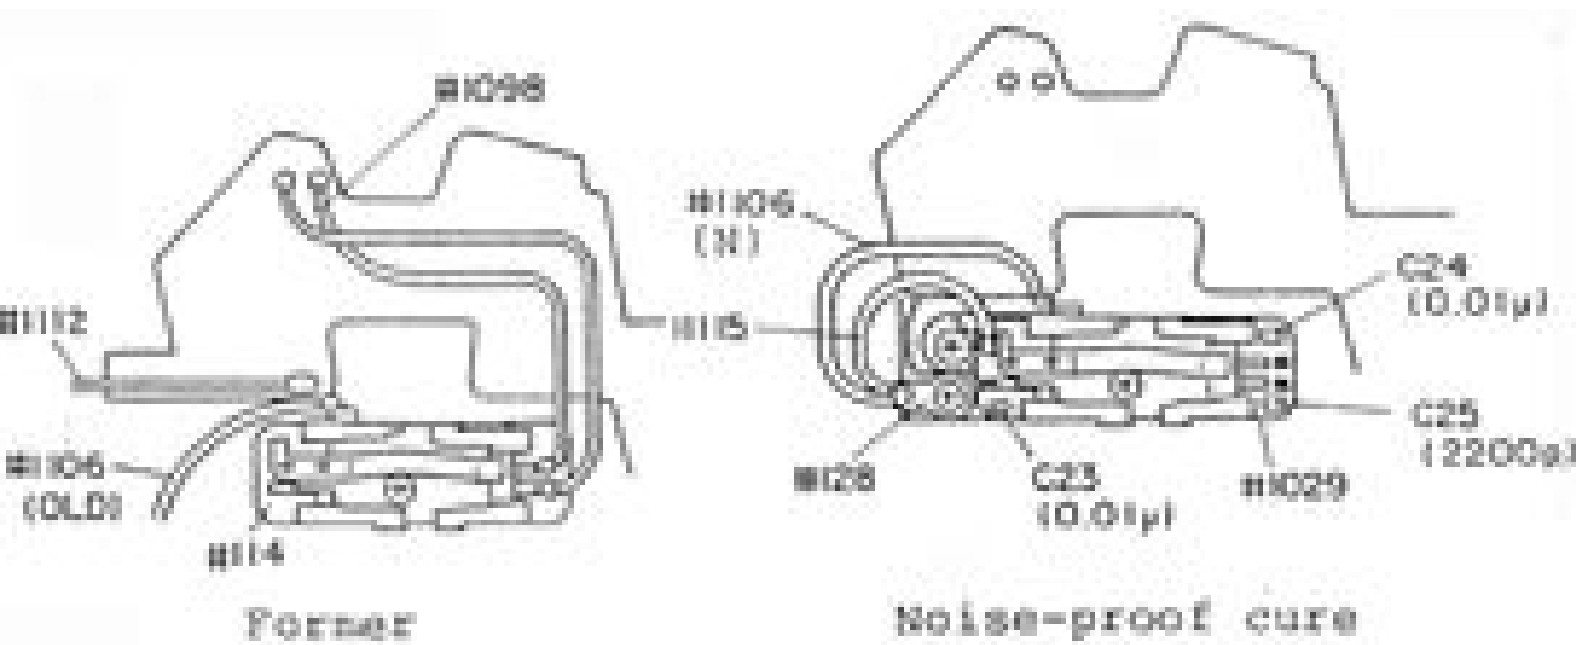

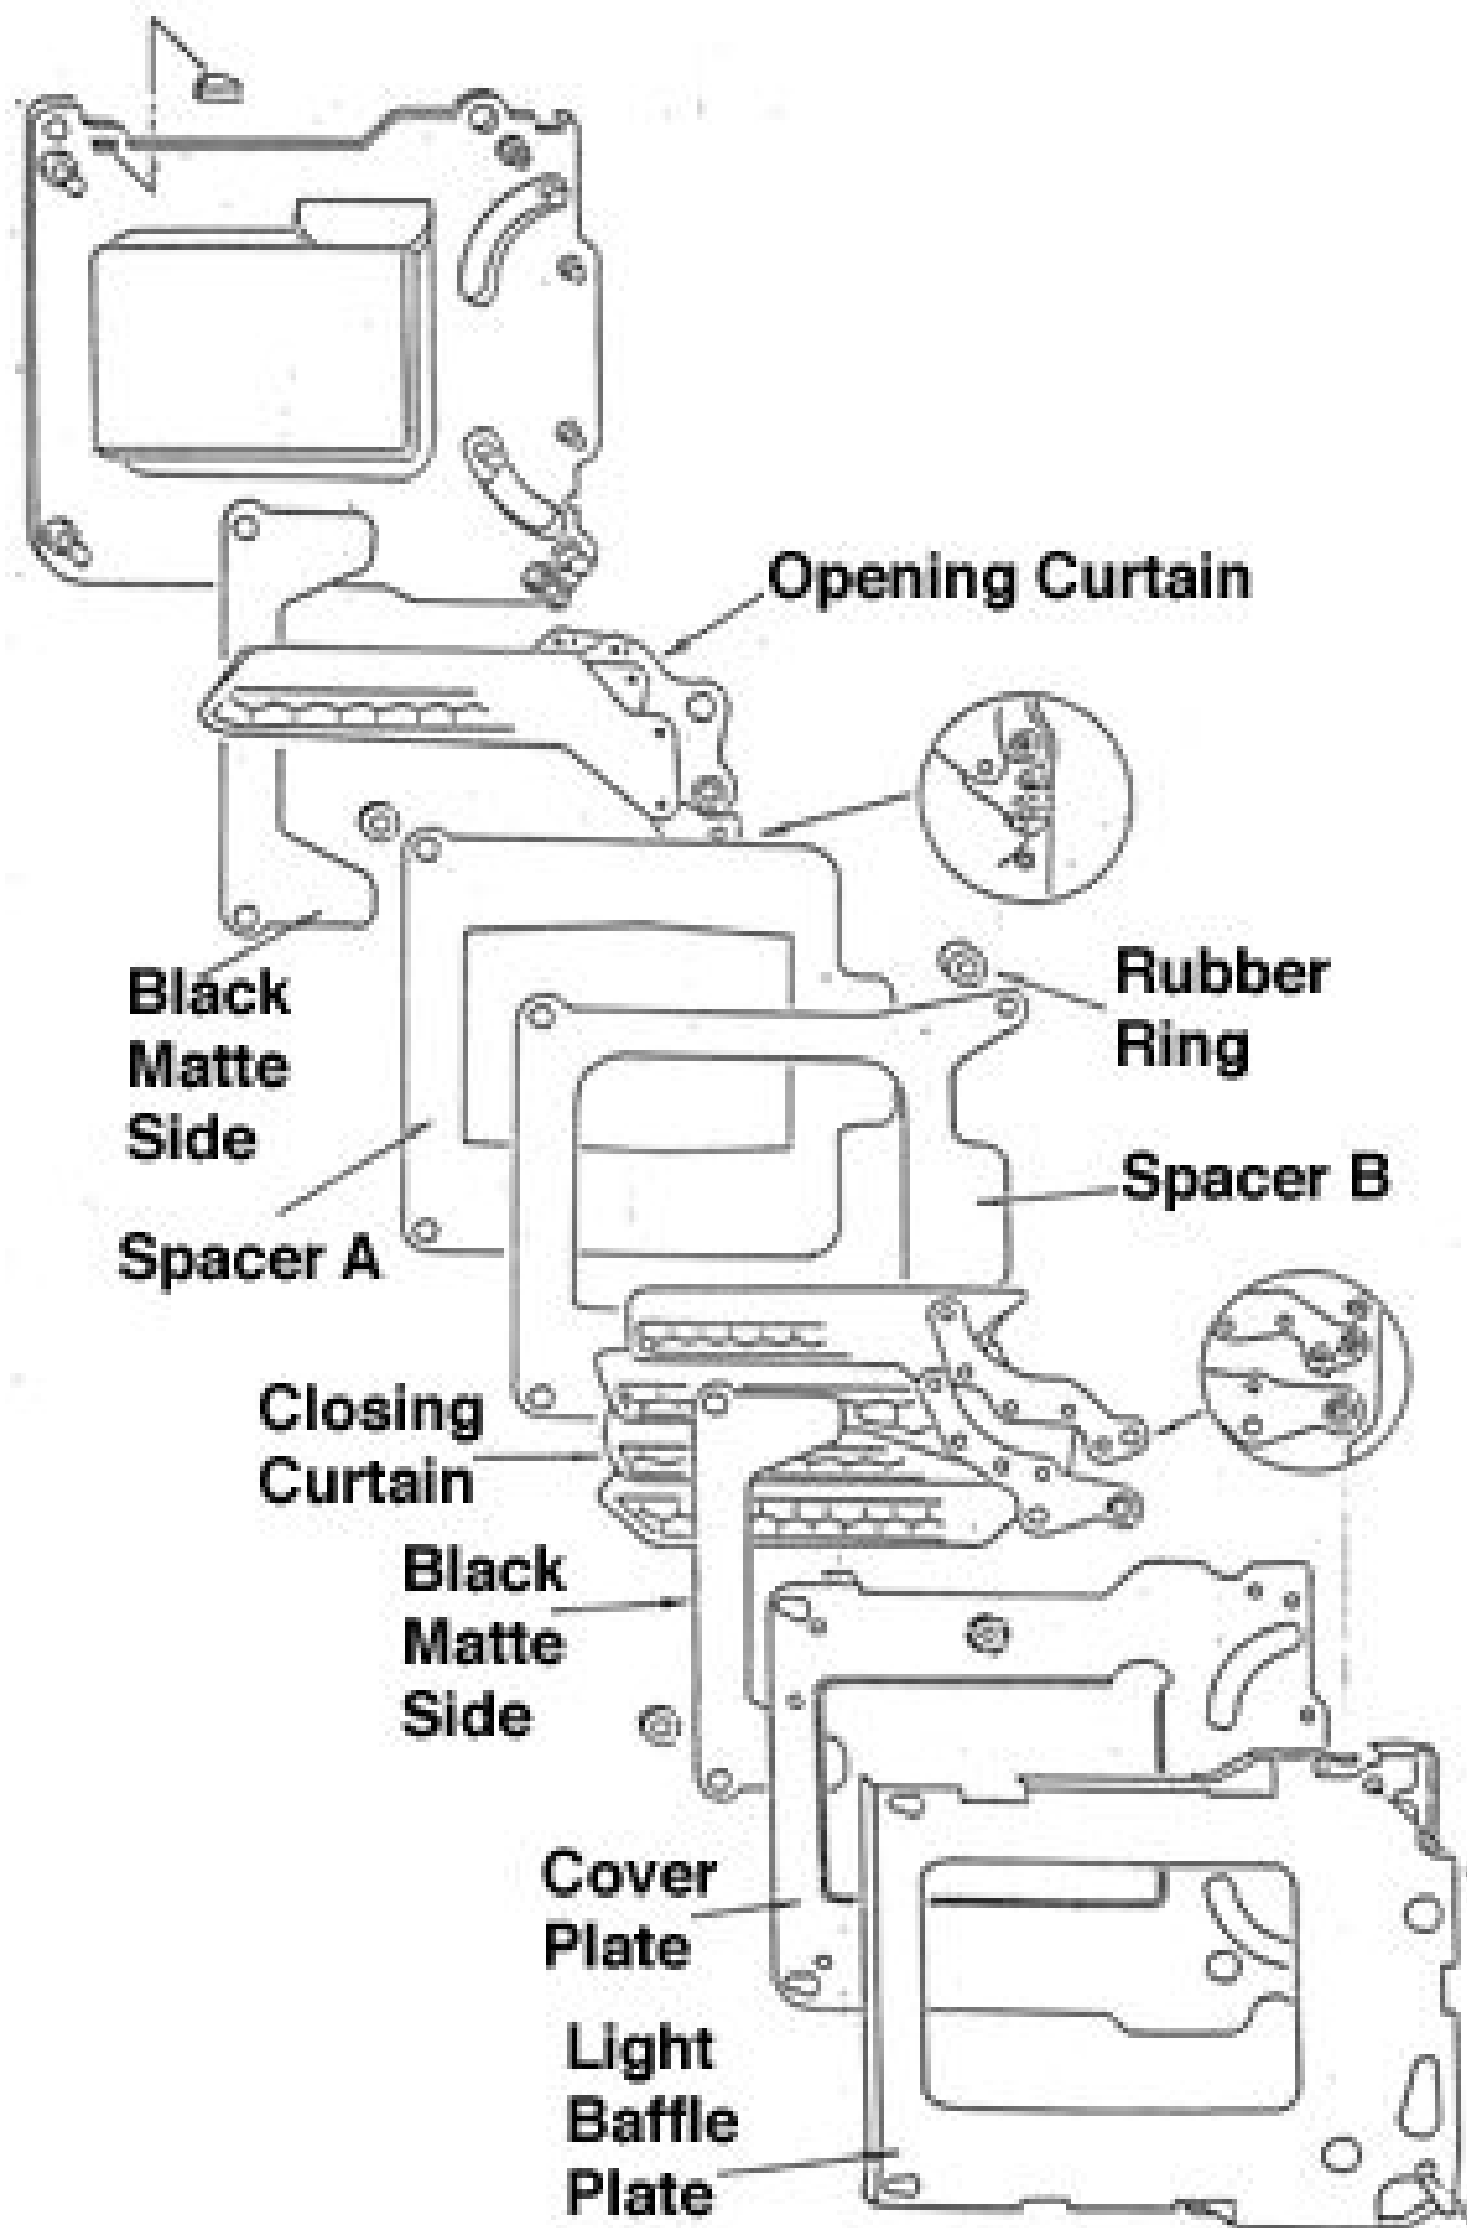
















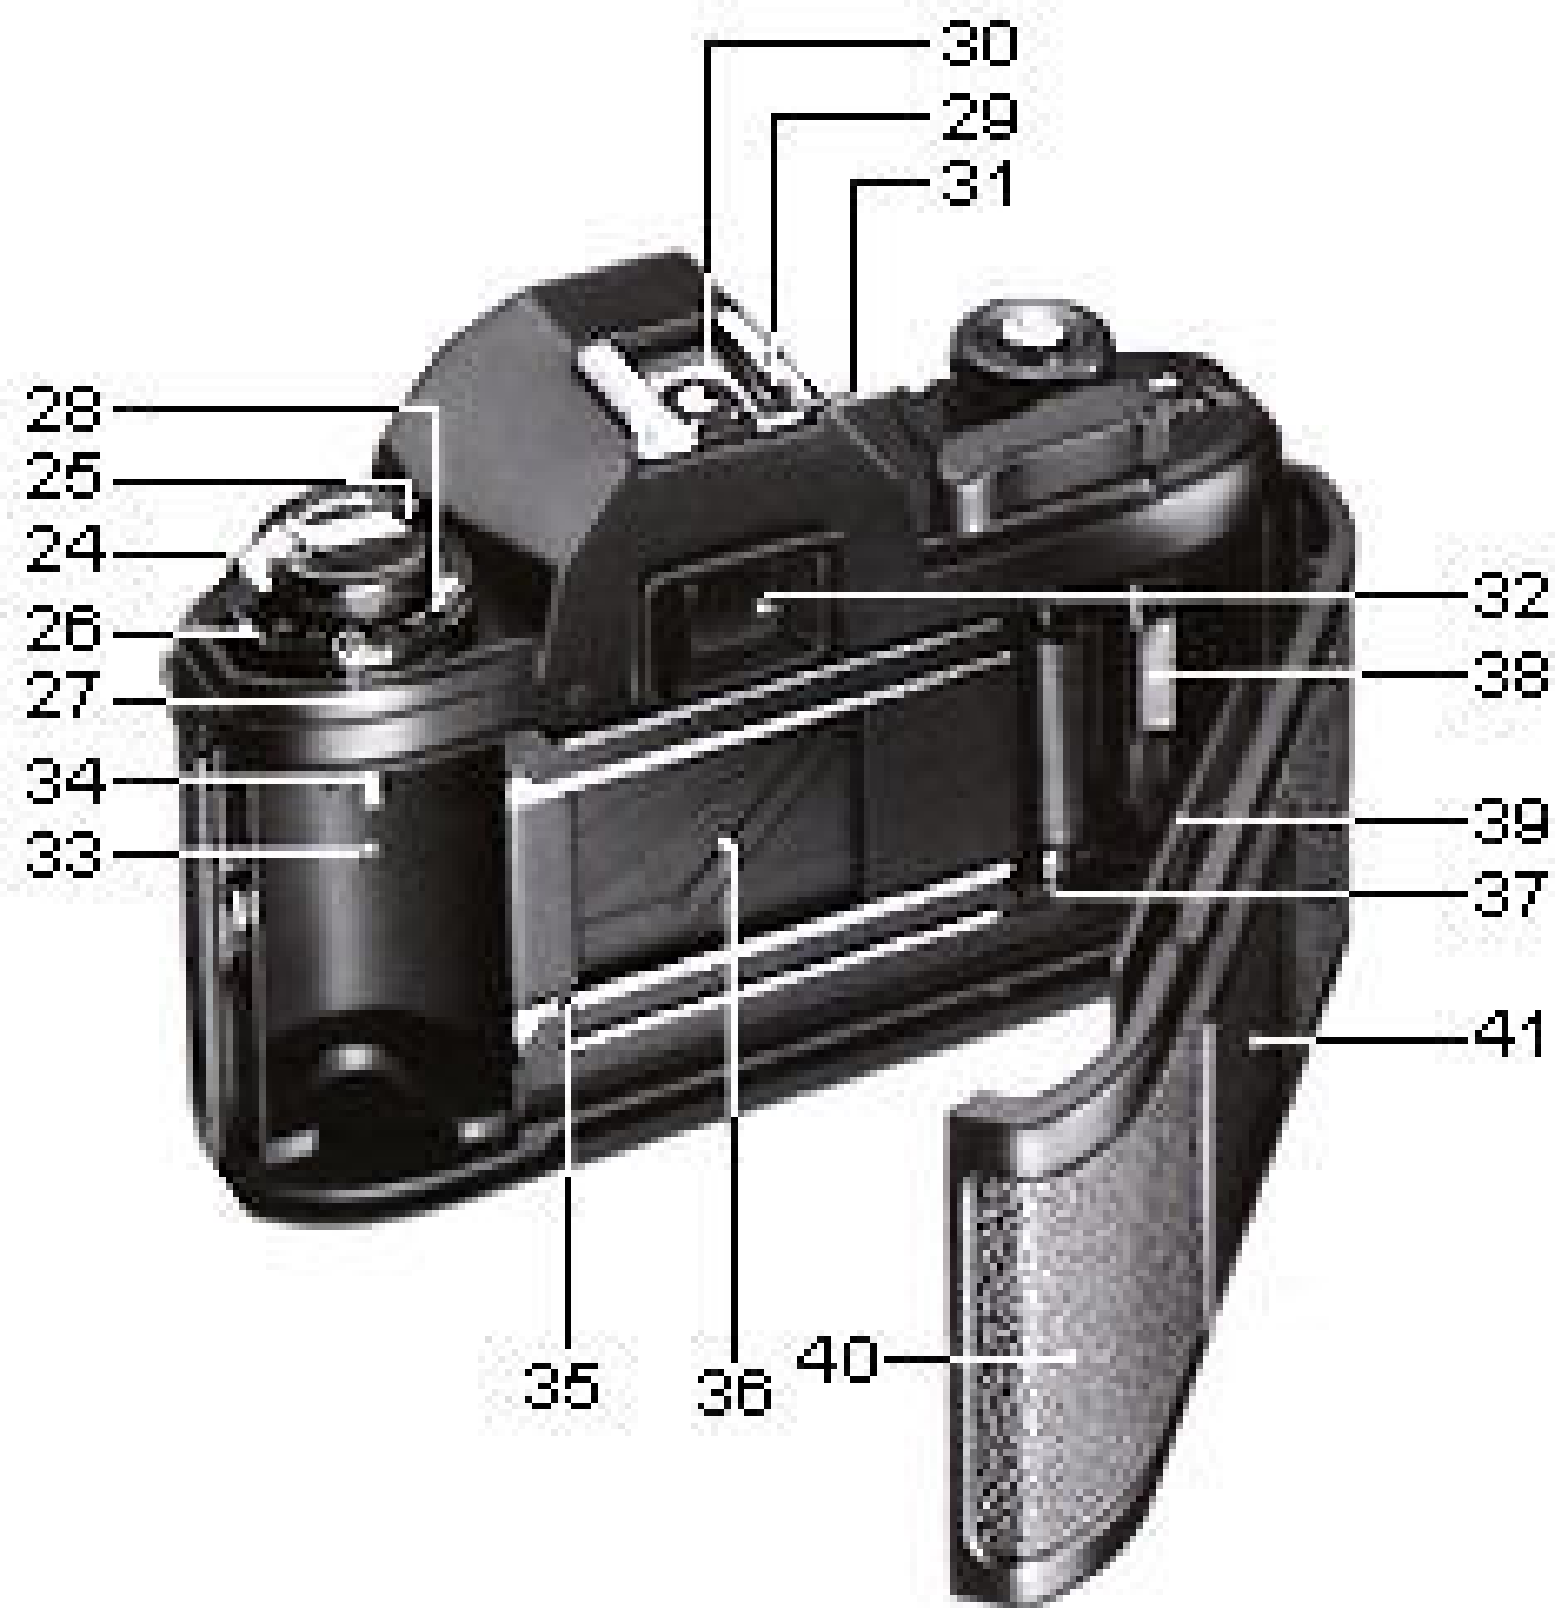














Horizontal Travel Focal Plane Shutter

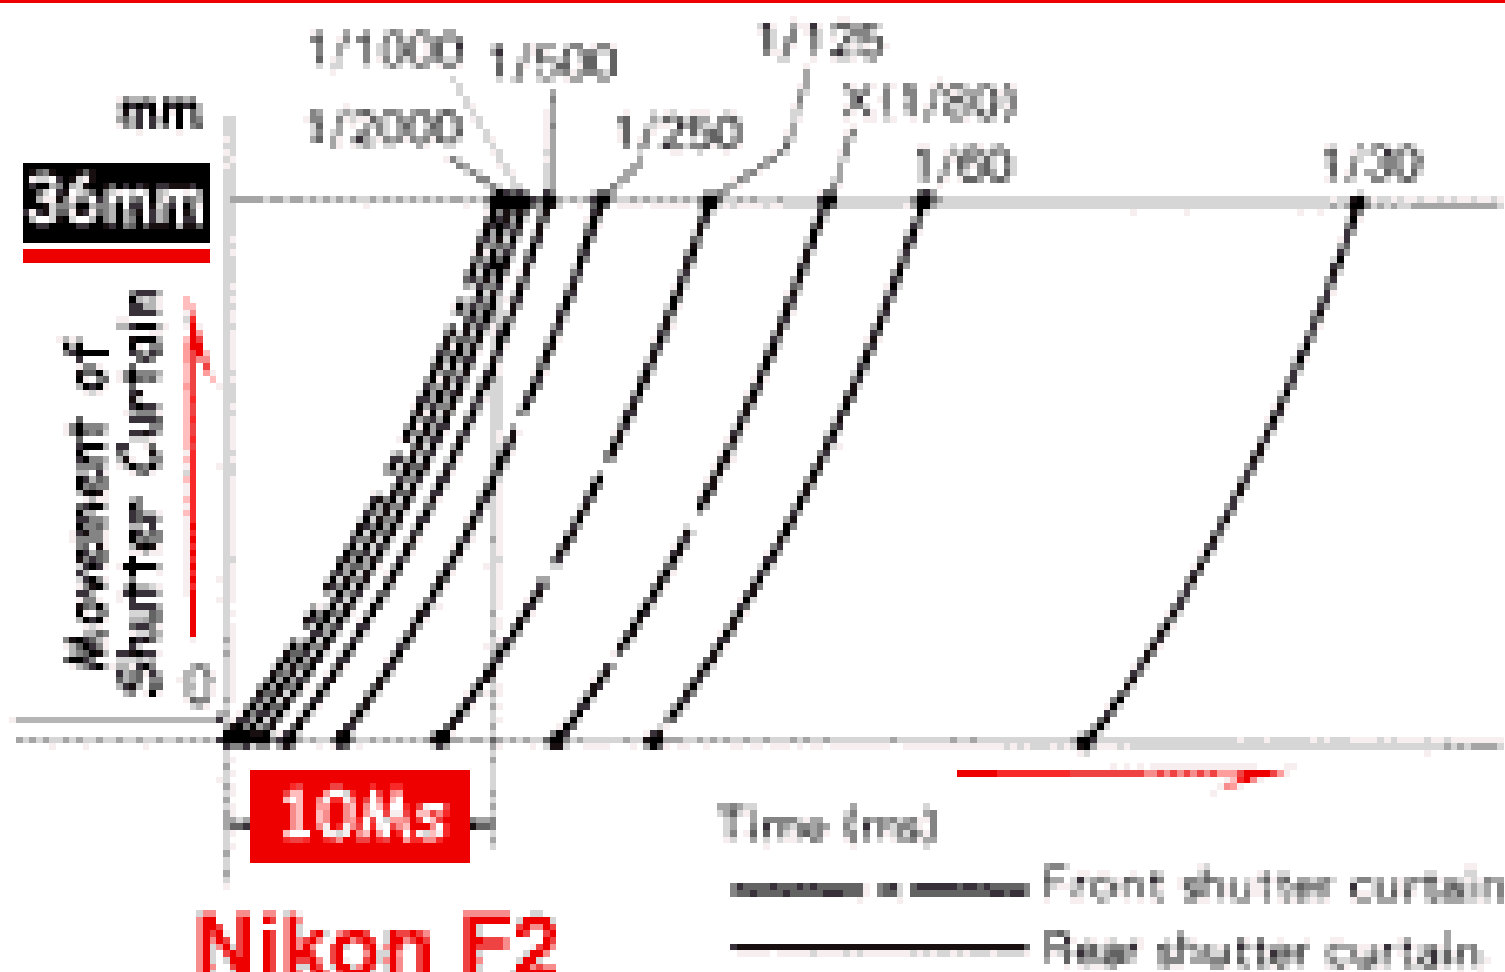



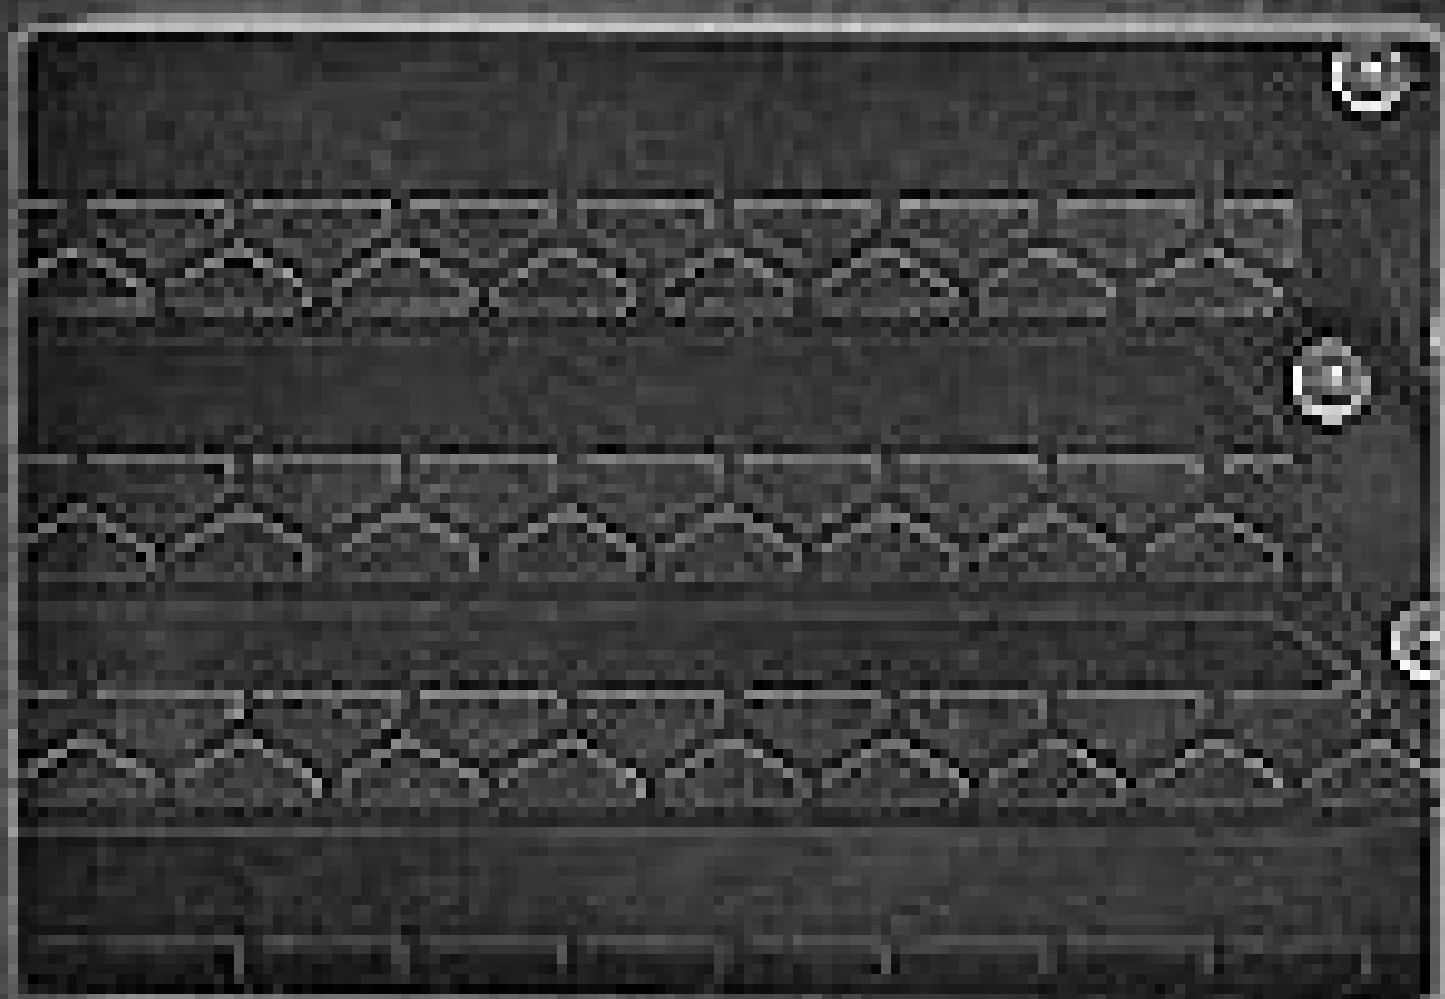

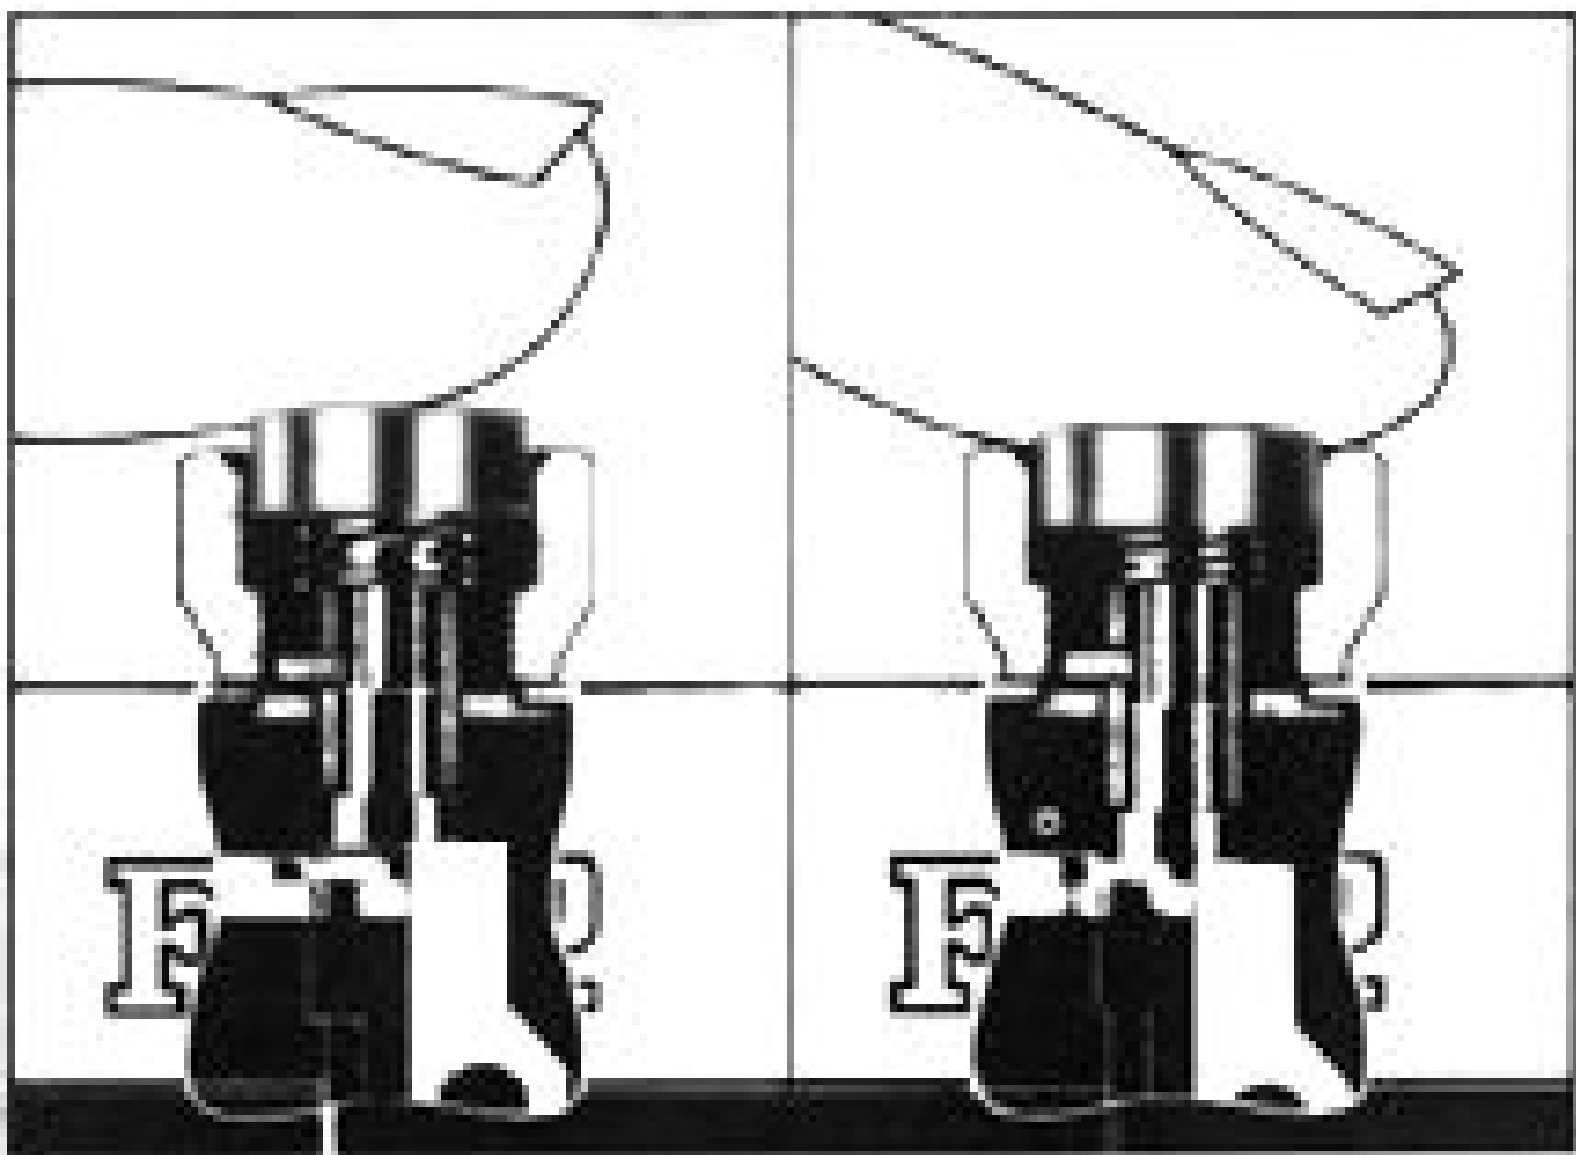











E2Ns



E2N













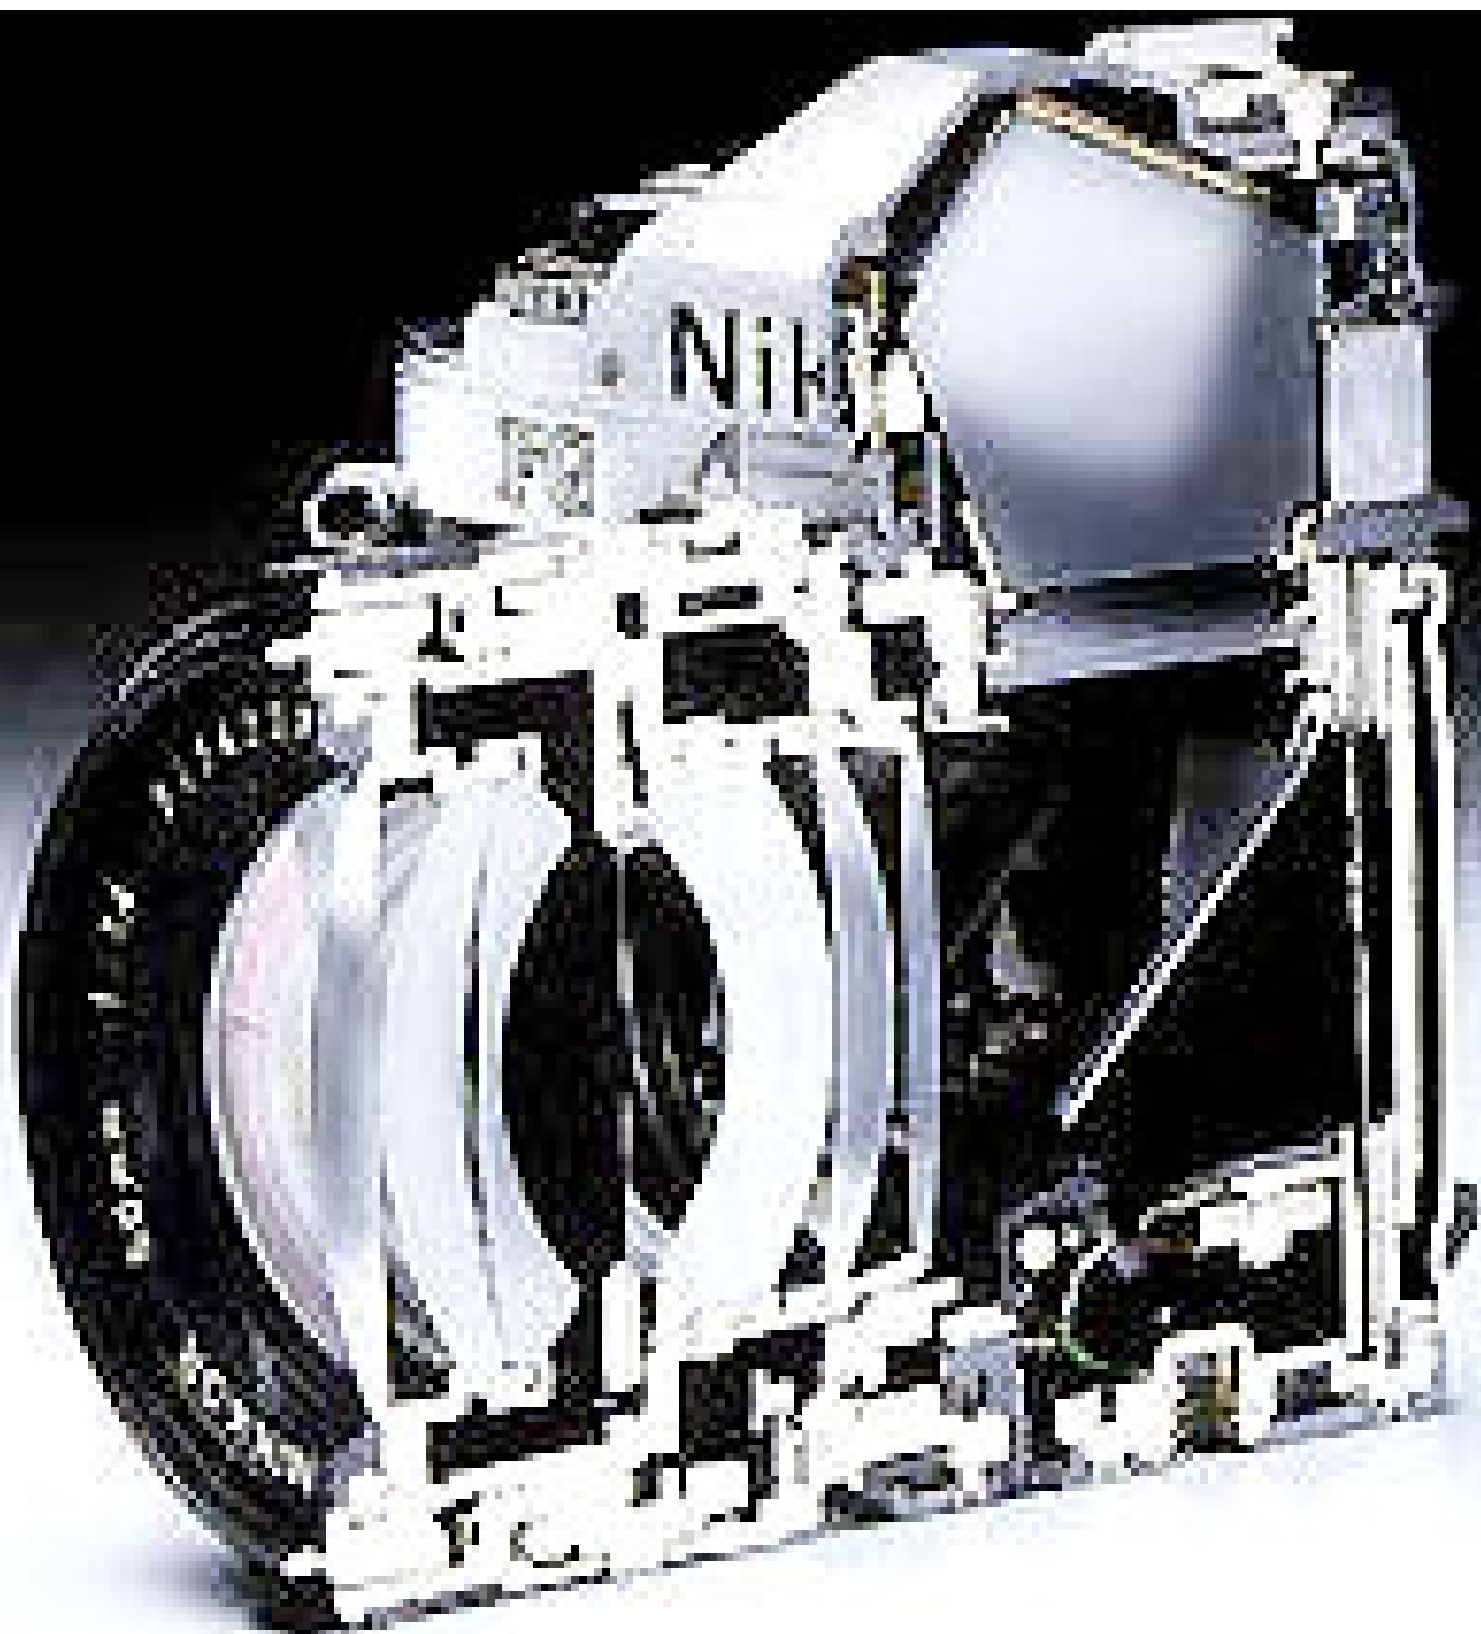




HT SB-15



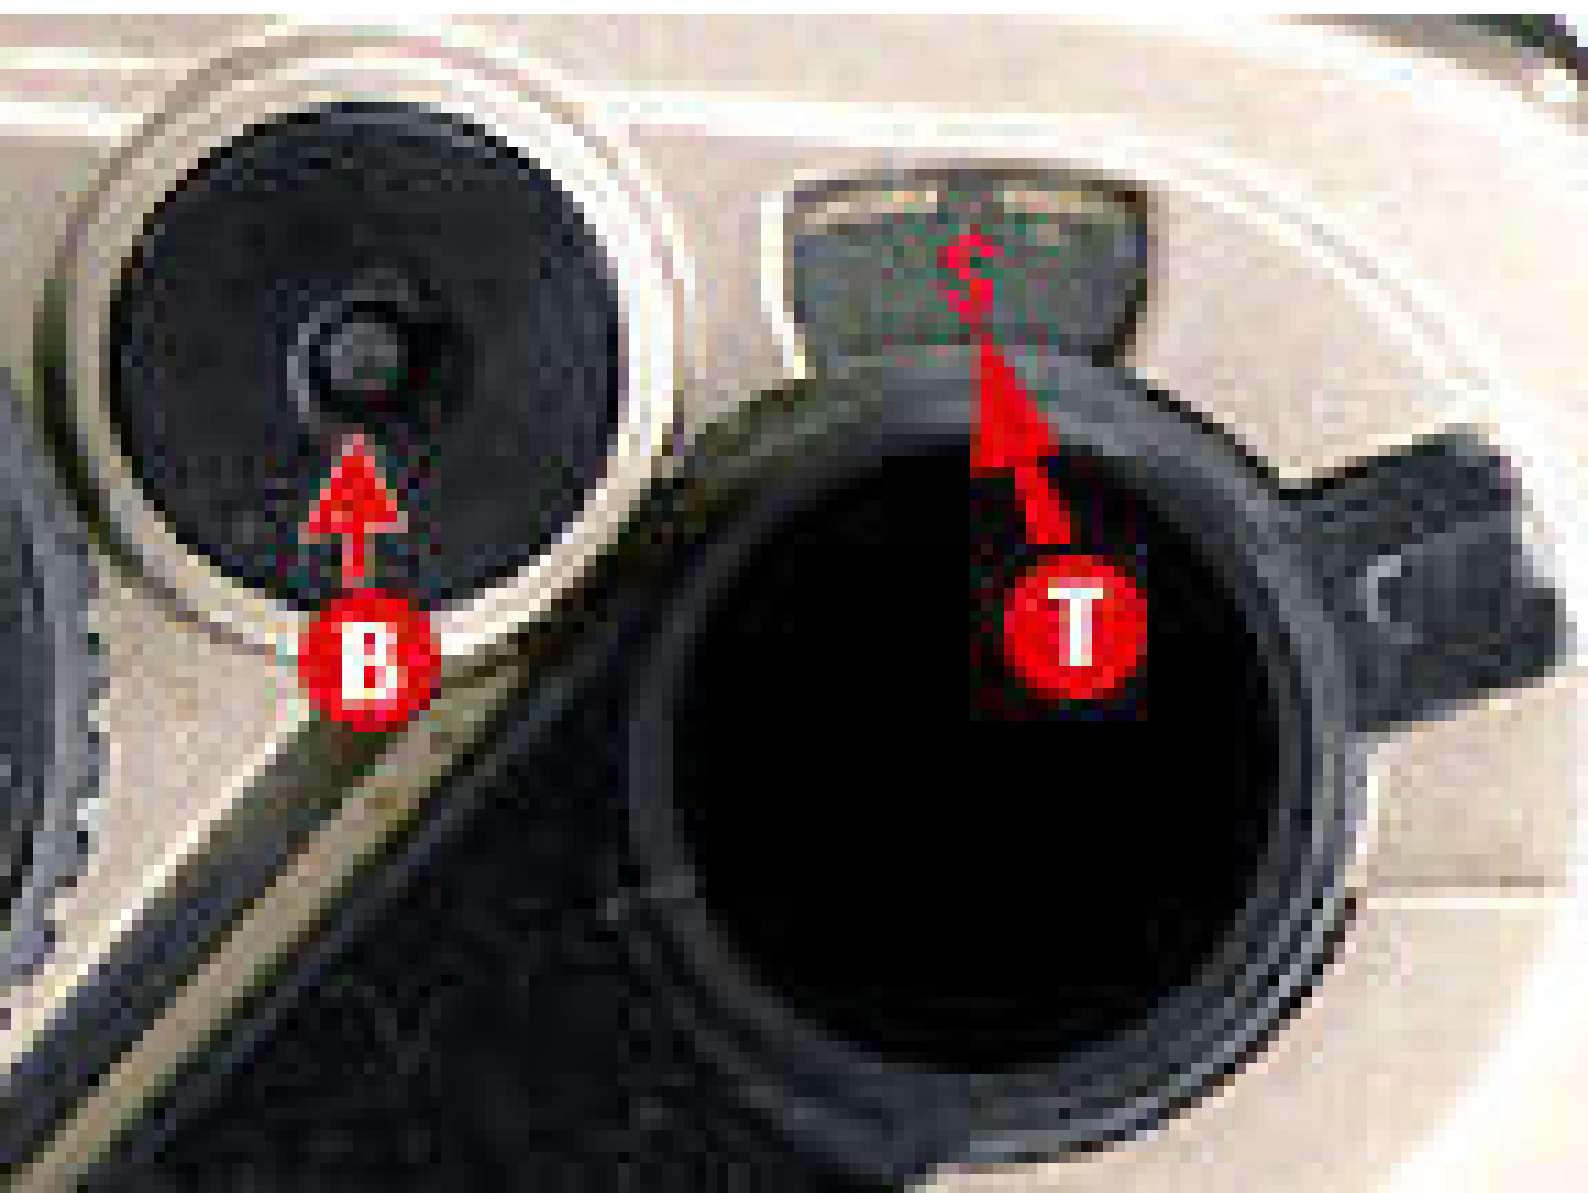

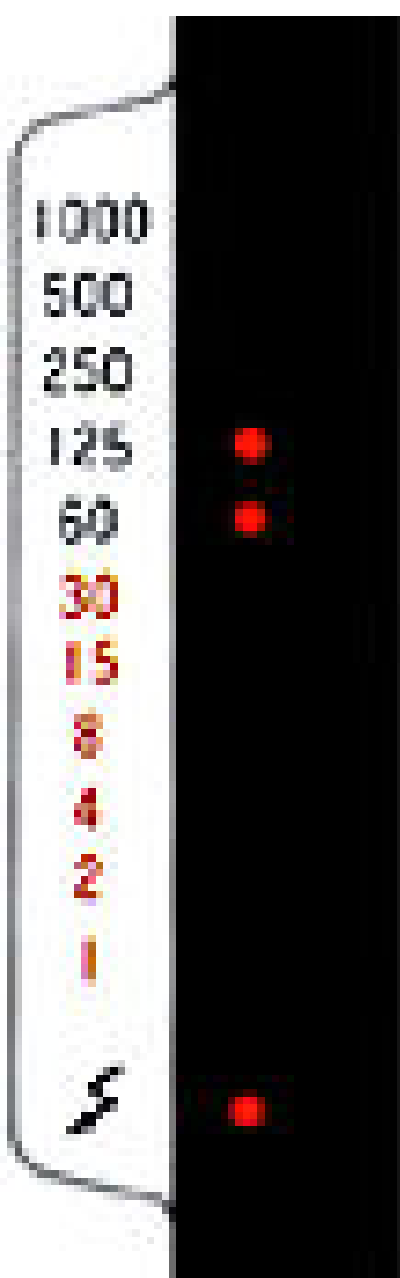

← **Shutter speed LEDs**
Light to indicate sync
shutter speed setting
of 1/90 sec.

← **Ready-light LED**















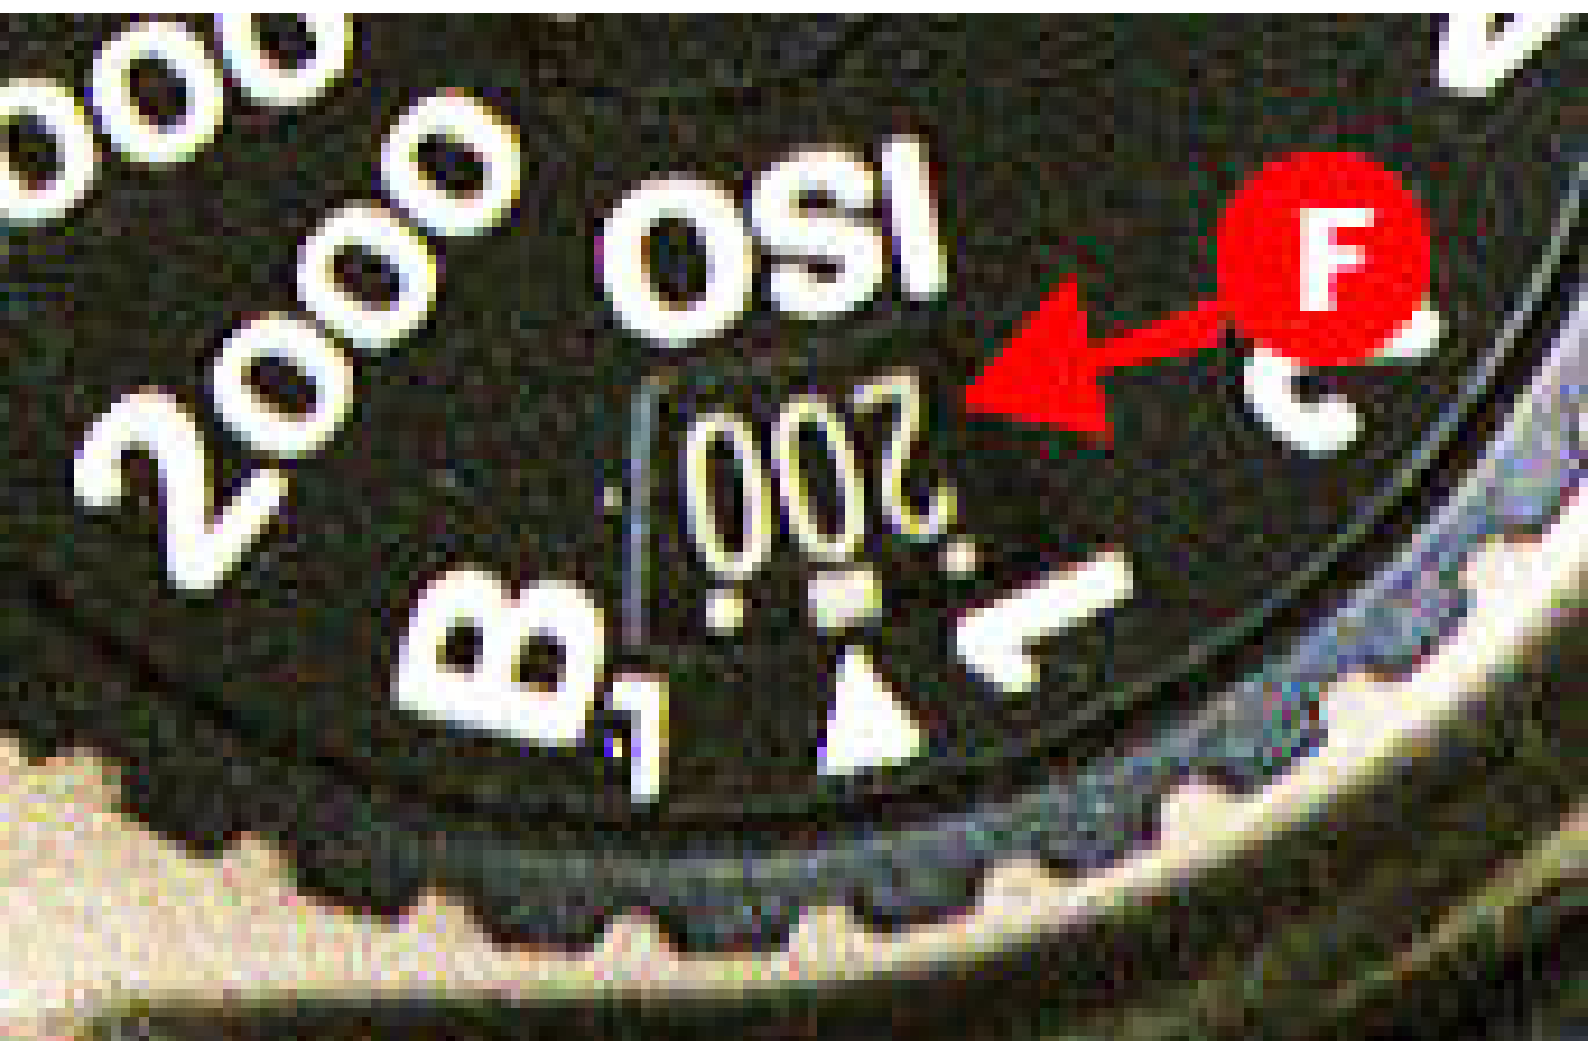





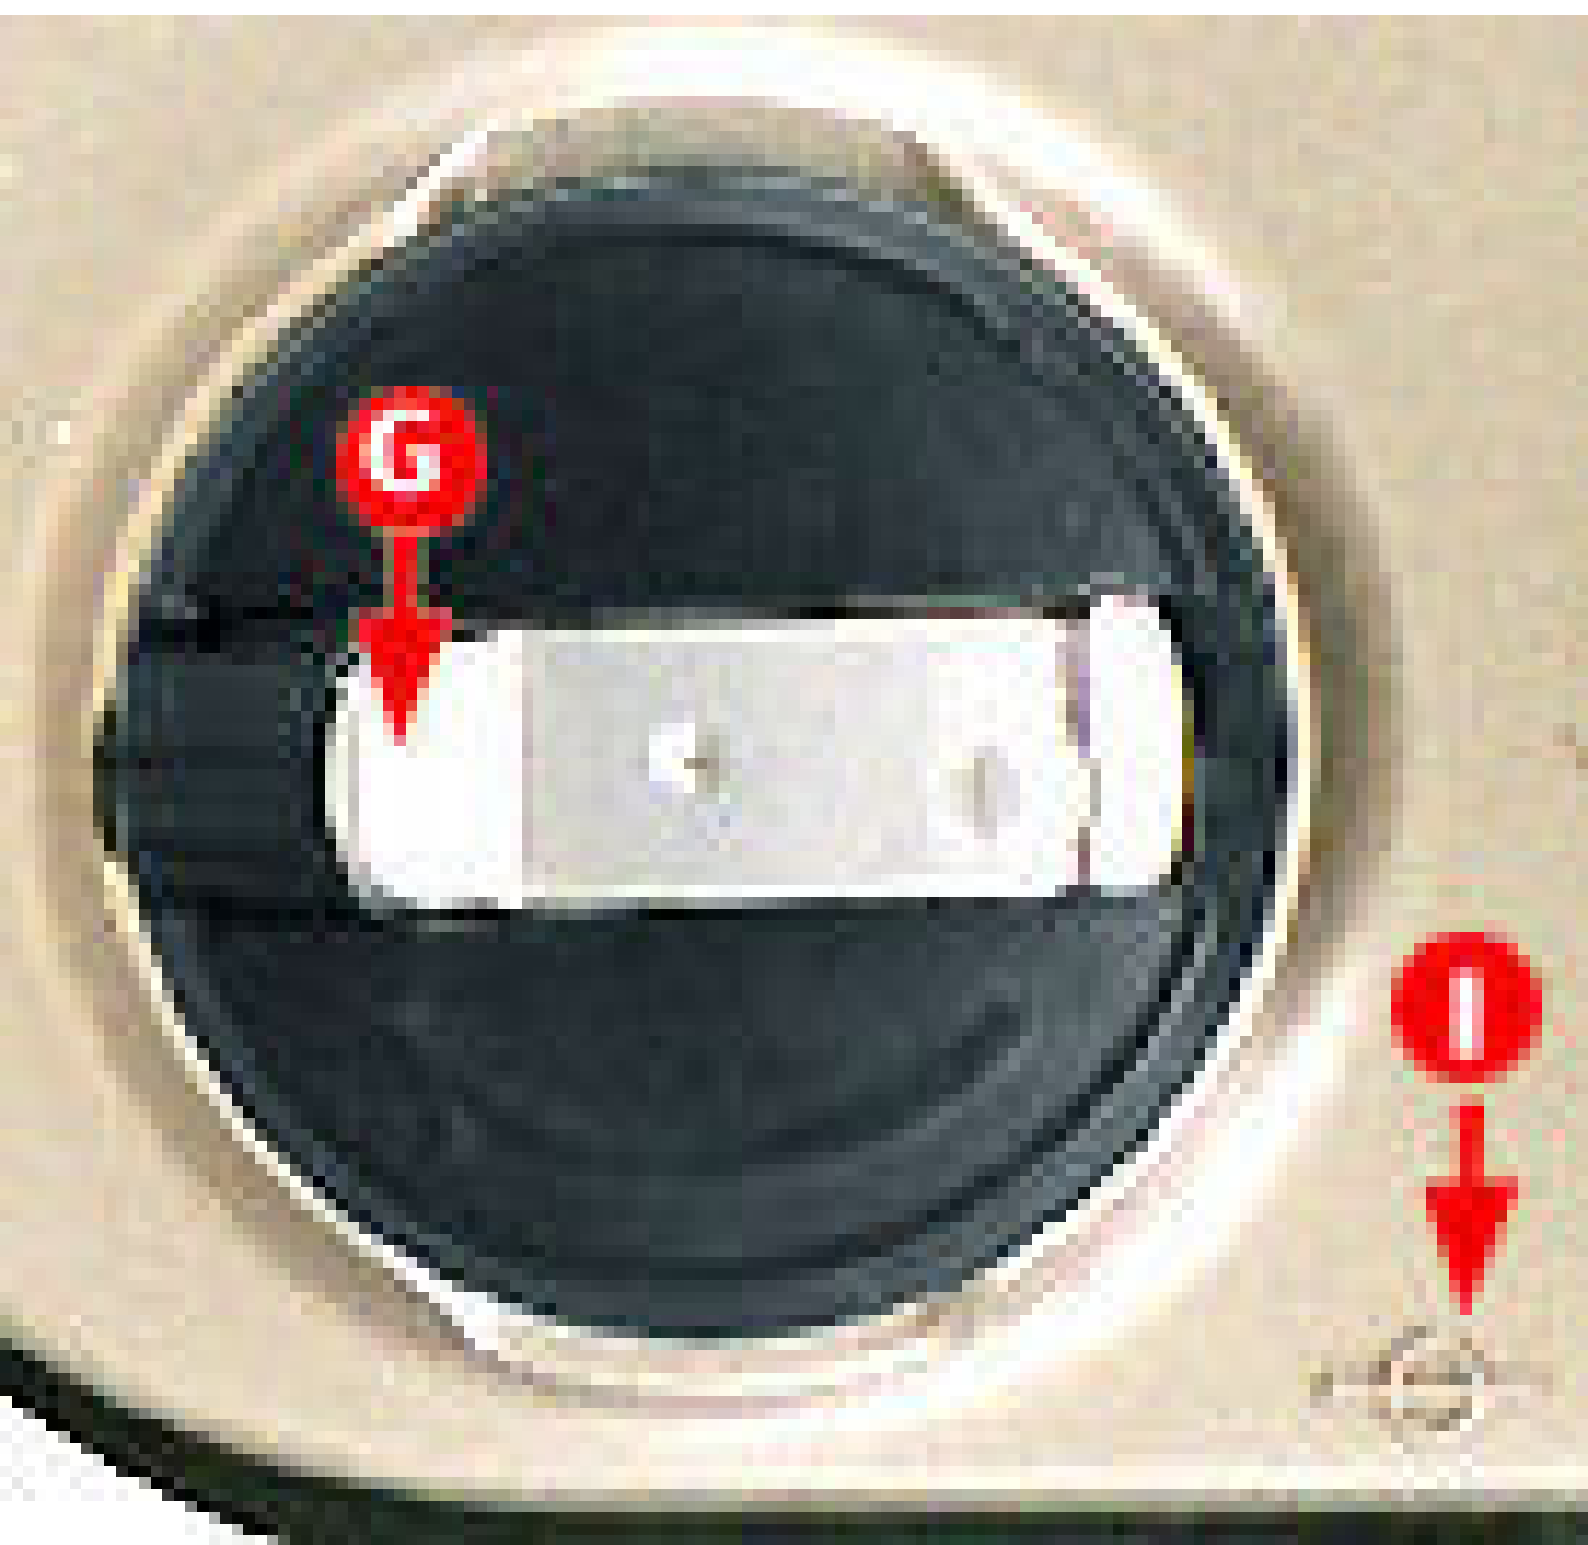



① Control indicators


② Control buttons

③ Display panel

④ Battery chamber lid





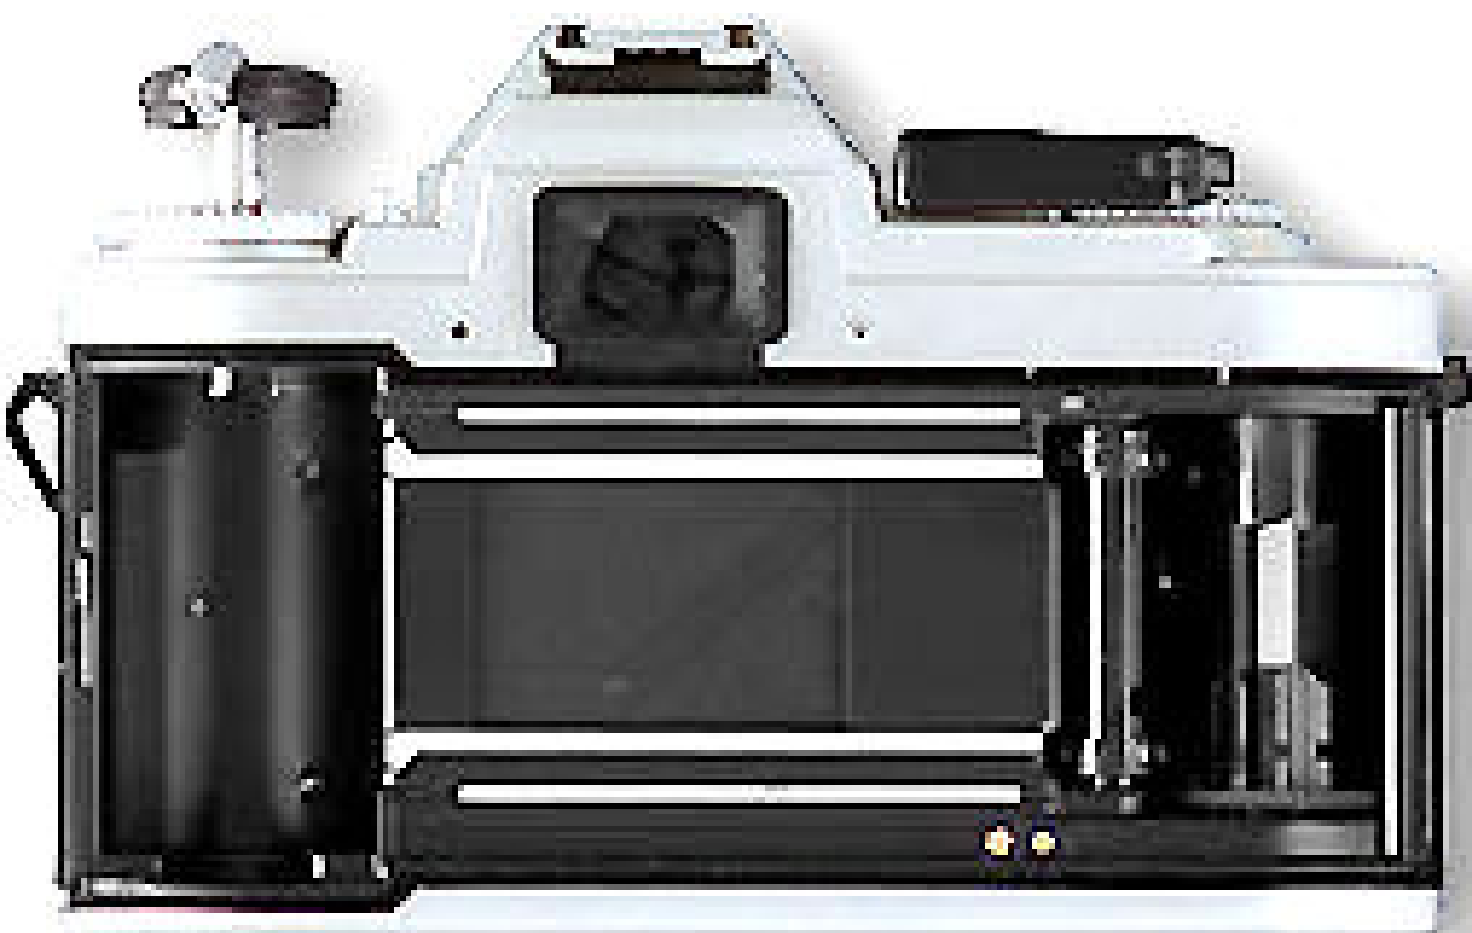
















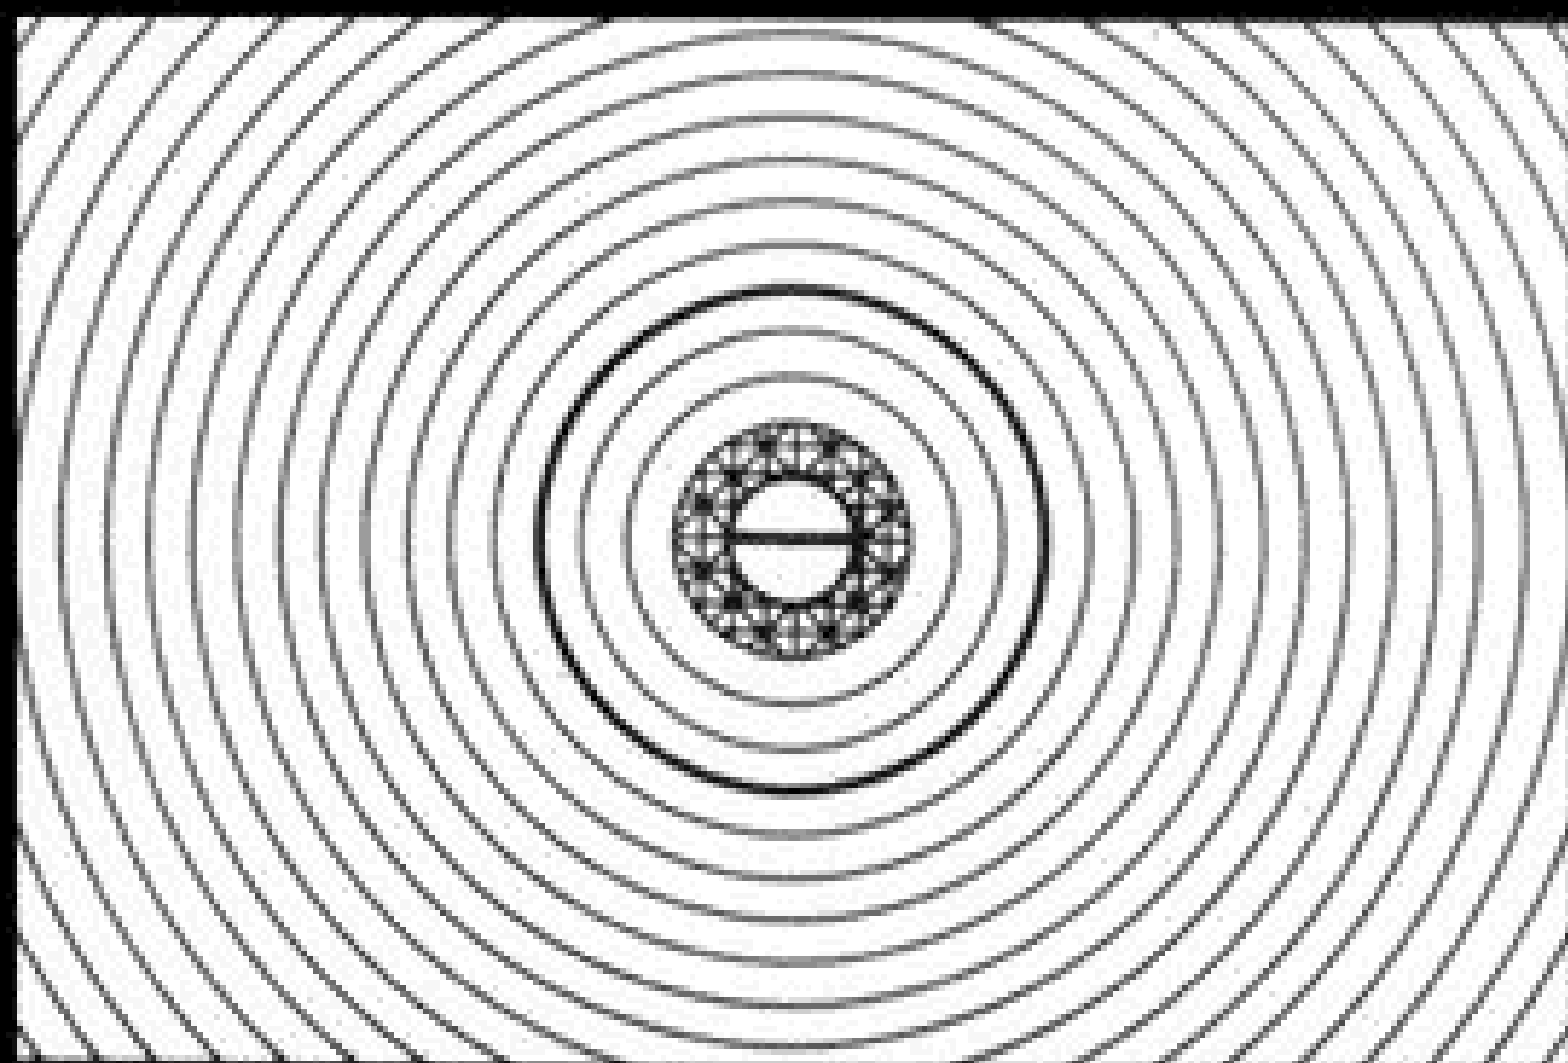
















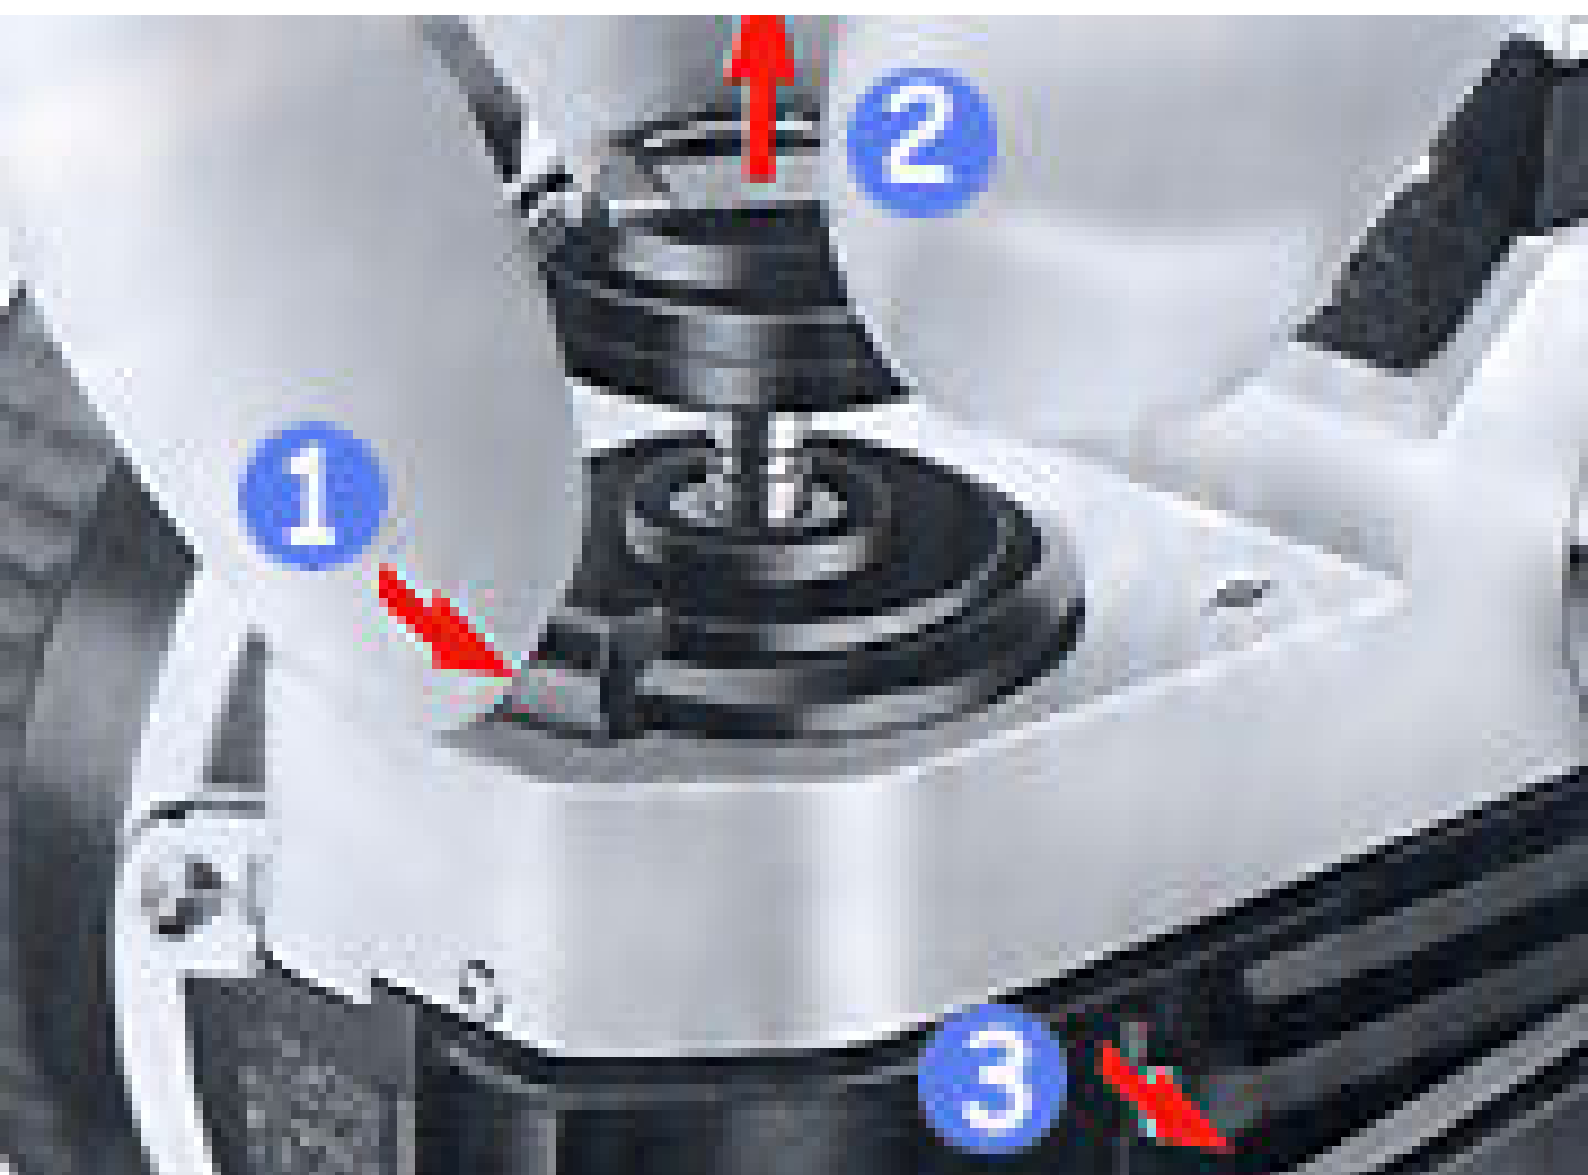




注意！


この展示は、展示期間中に、展示会場での
写真撮影・ビデオ撮影・録音・複製
などの行為を禁止しています。

注意！

この展示は、展示期間中に、展示会場での
写真撮影・ビデオ撮影・録音・複製
などの行為を禁止しています。



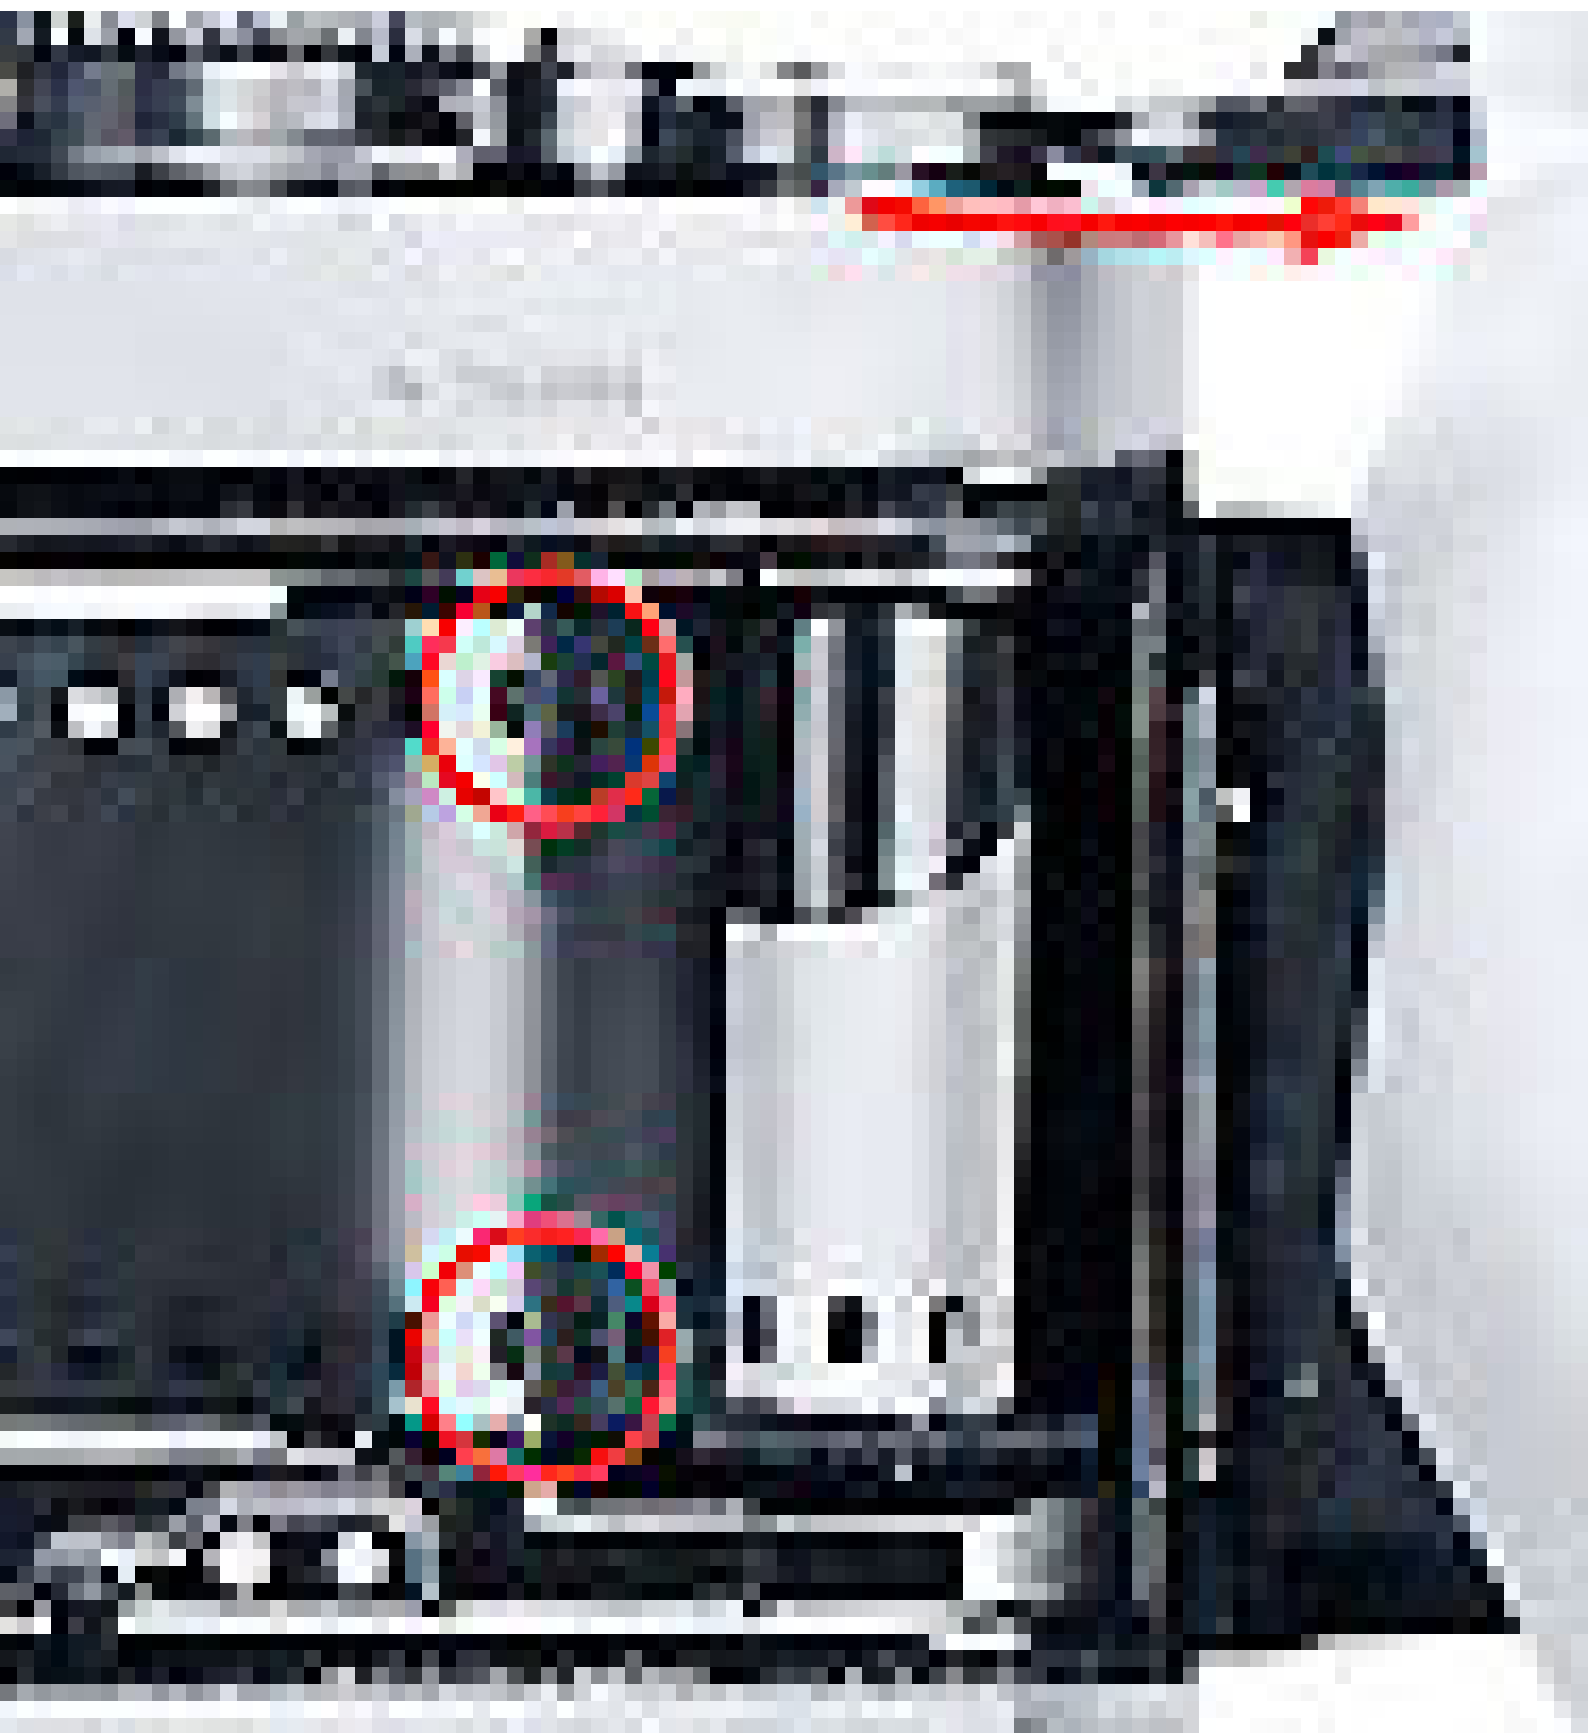

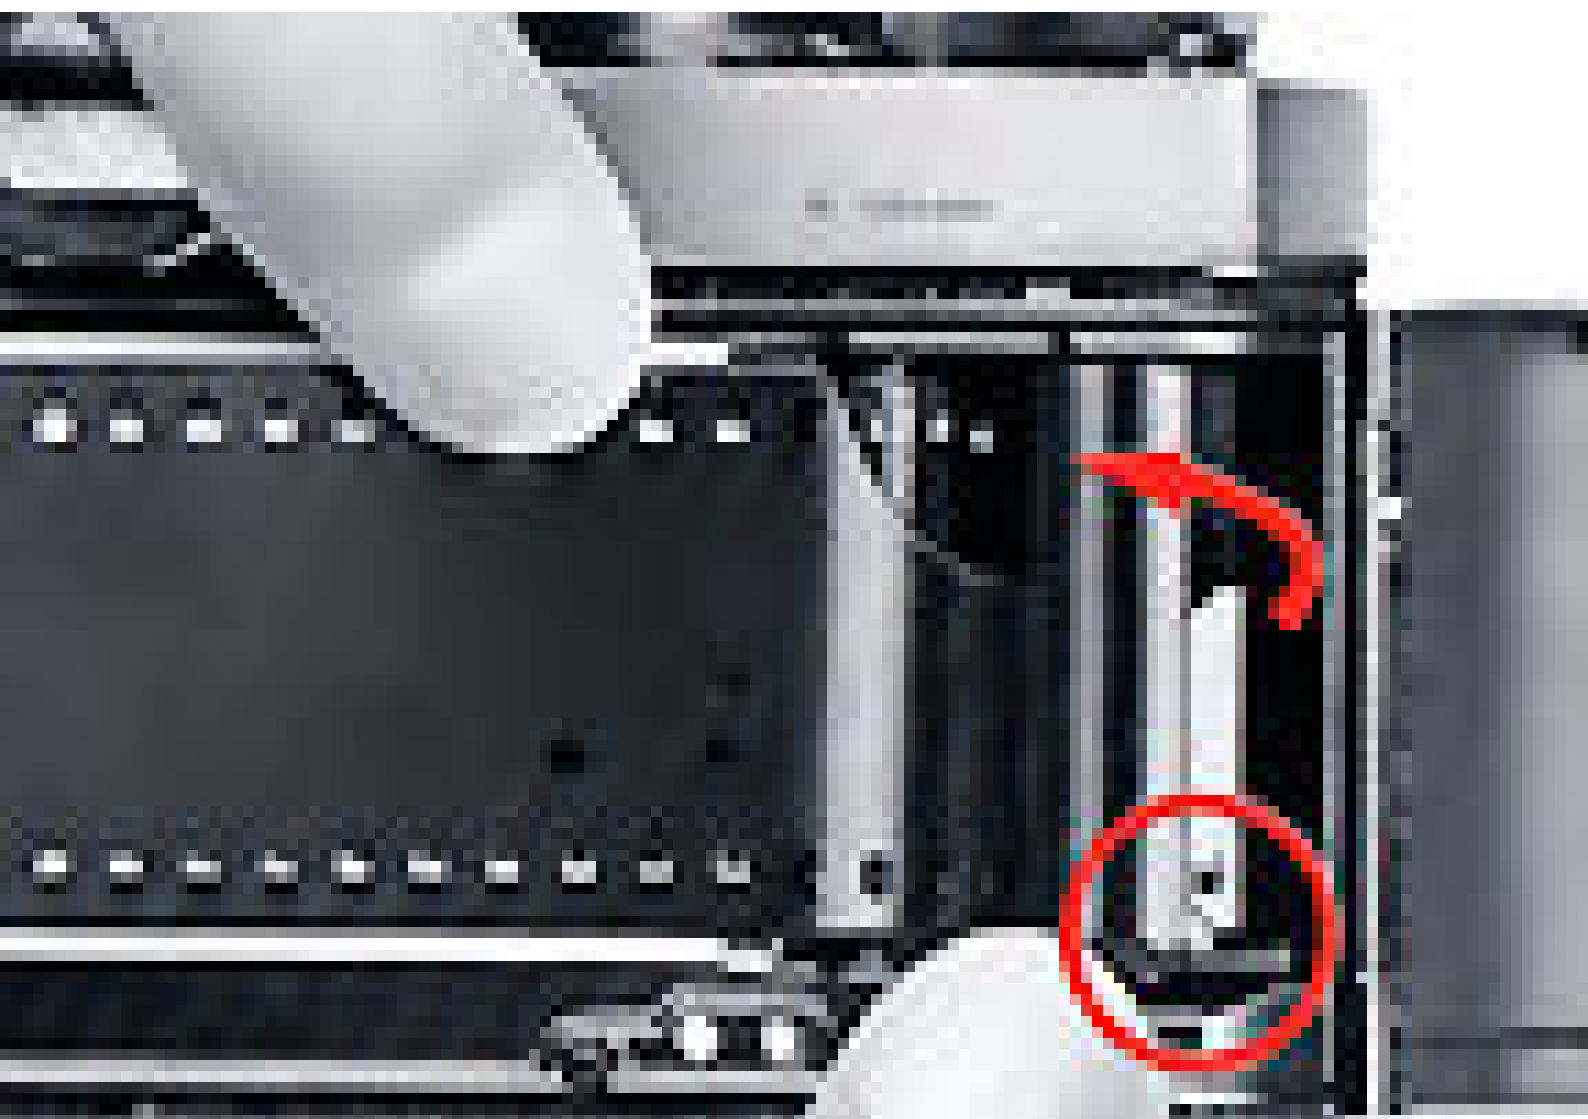





— 0.6 - 3m

READY

A



AUTO-FLASH RANGE 0

A

ASA

25

50

100

F

2.8

4

5.6





