







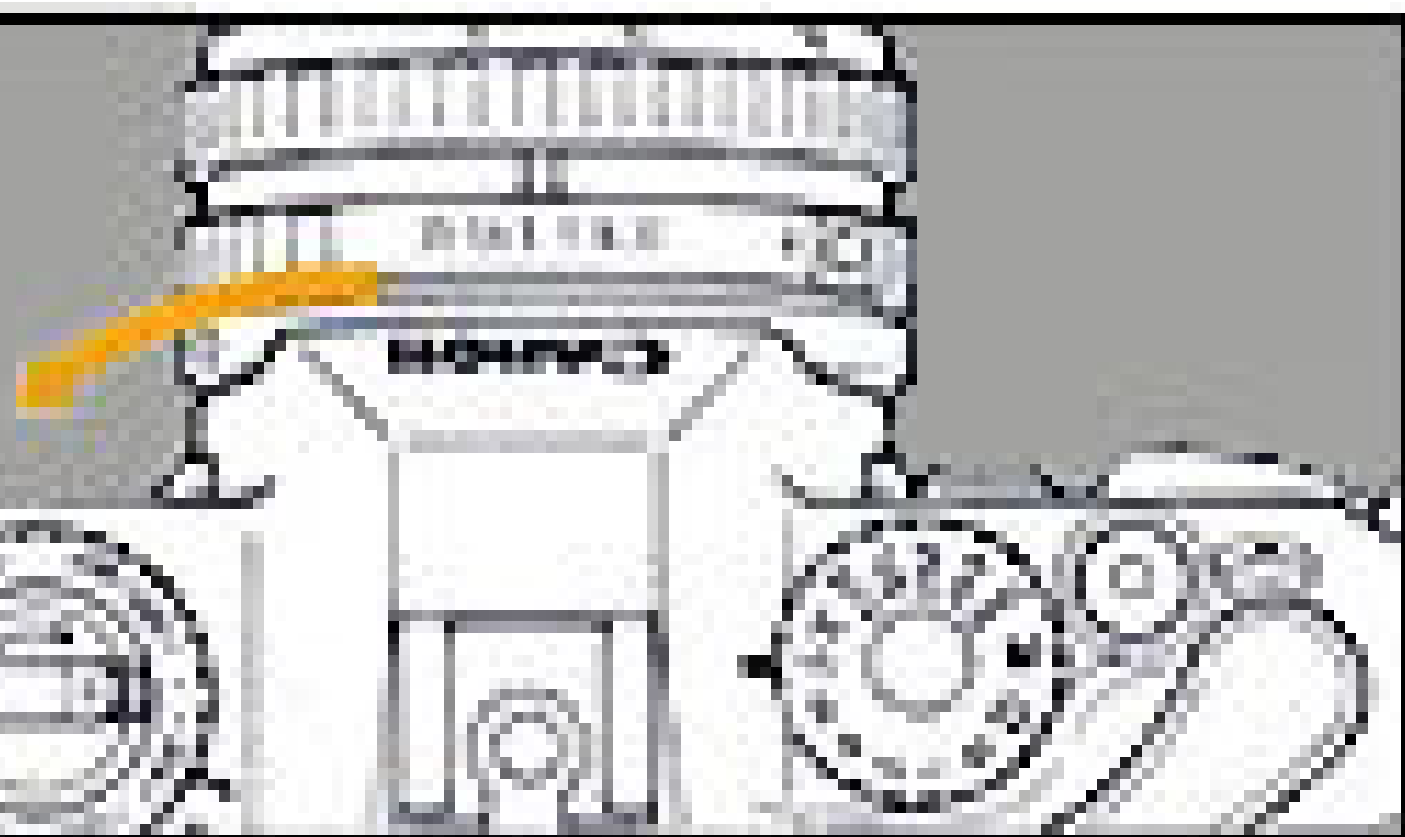


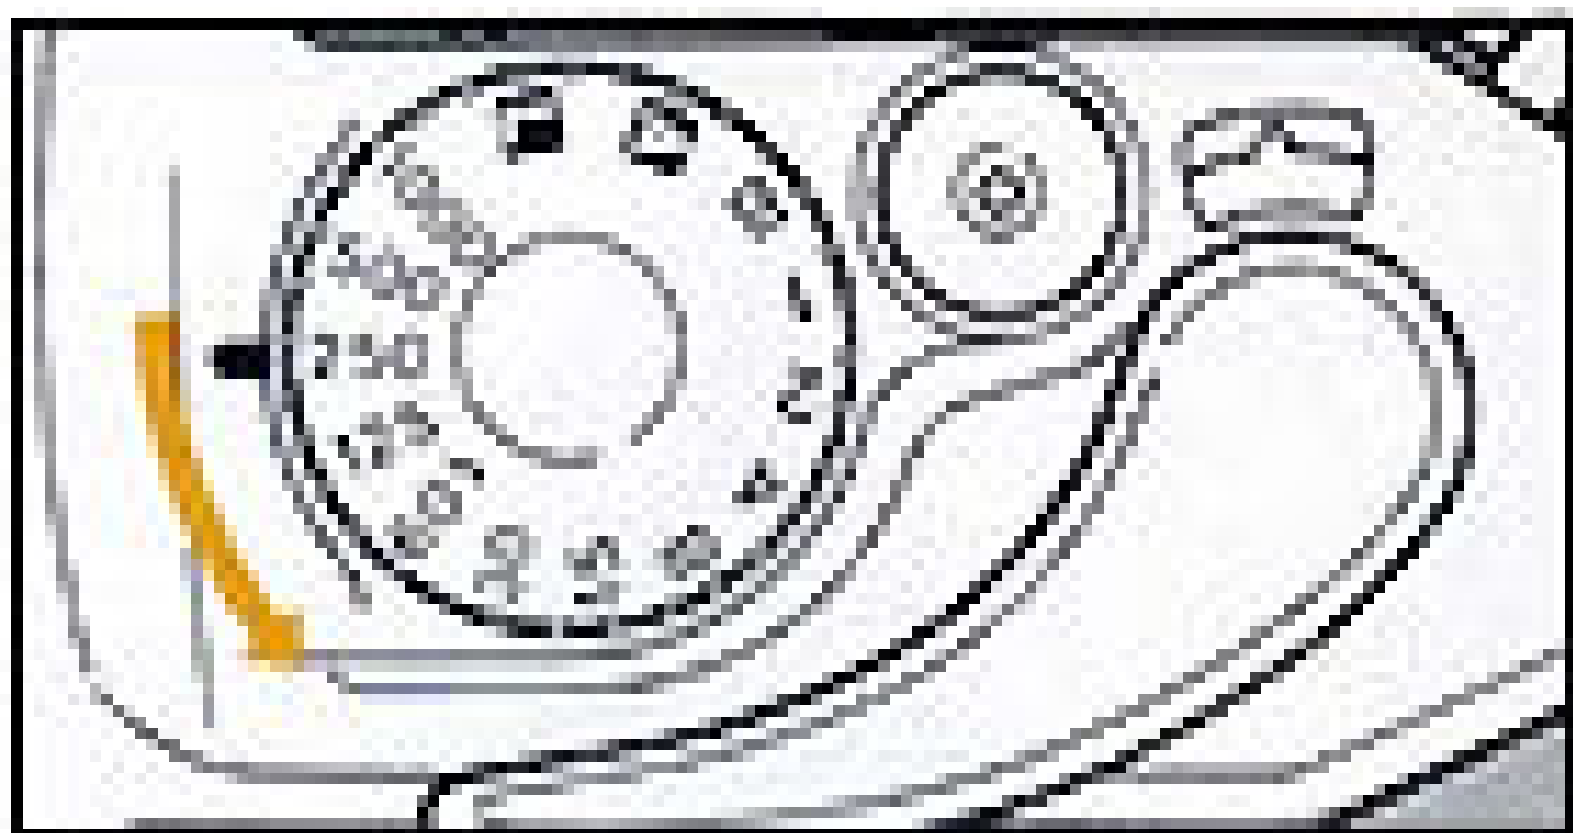


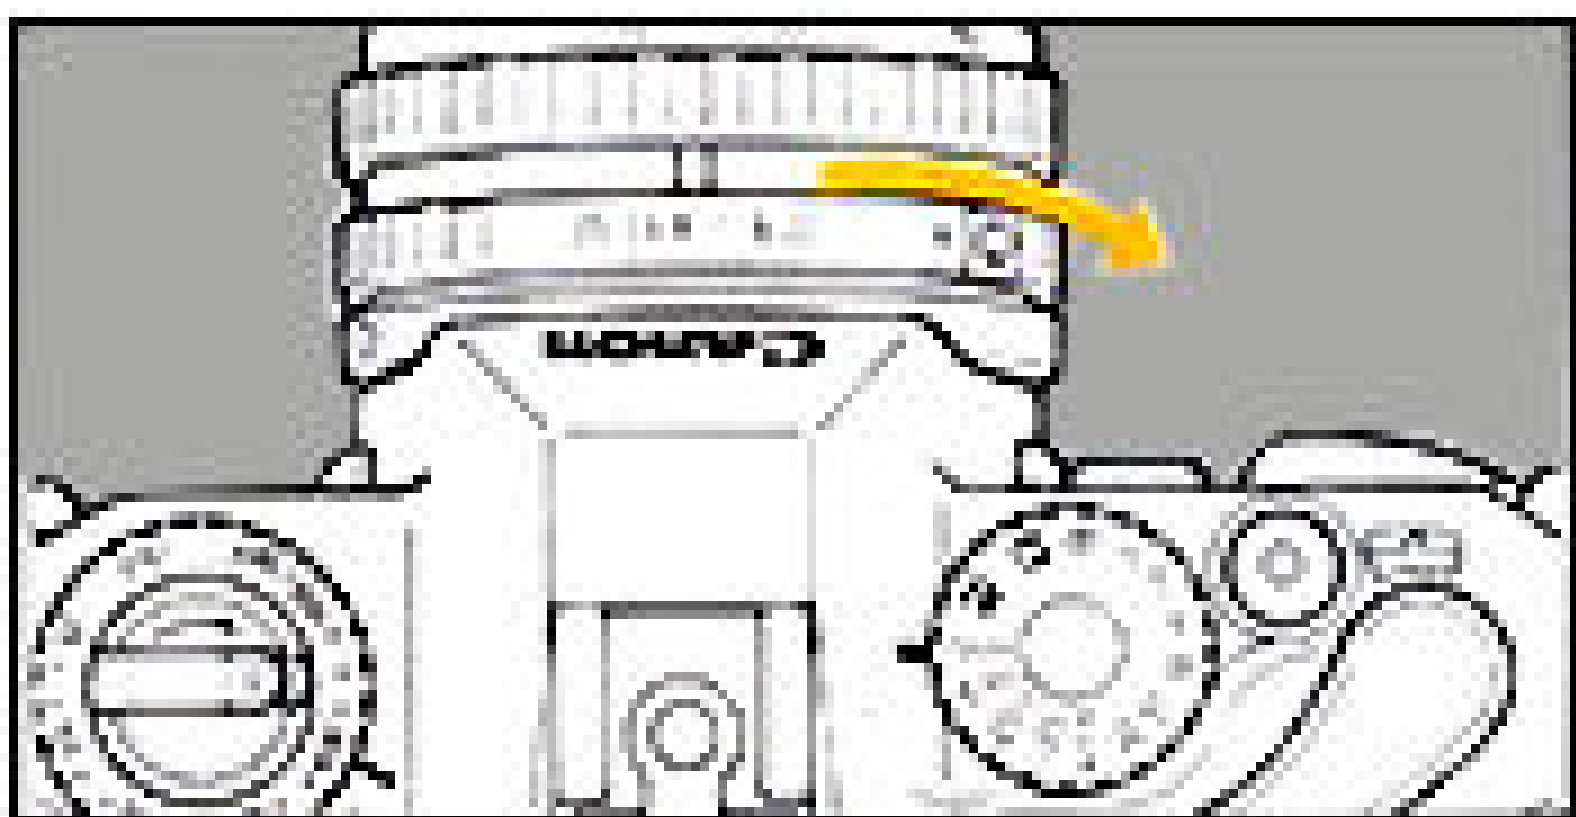

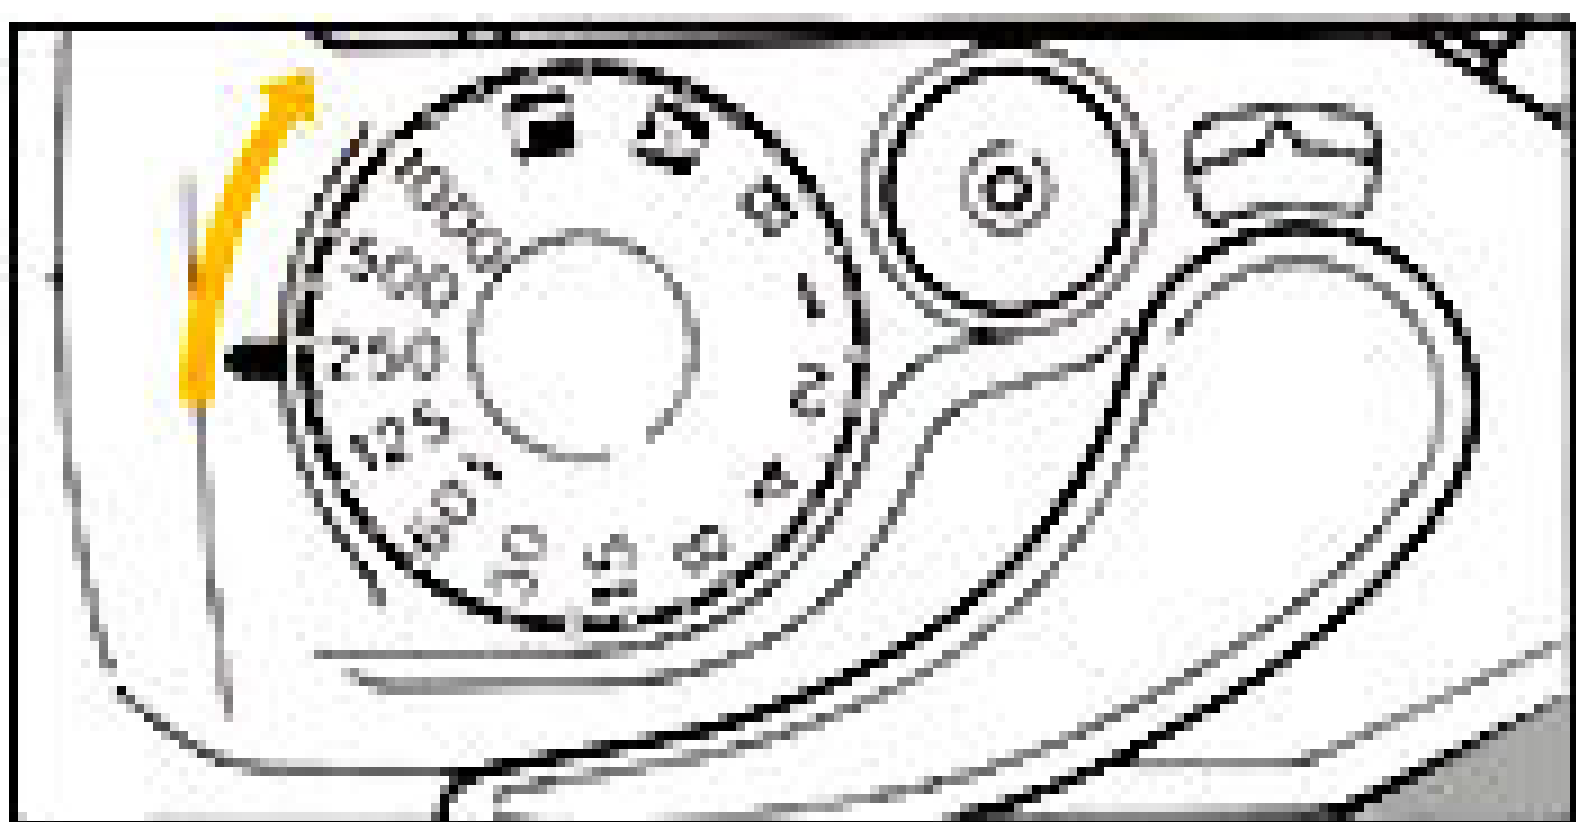


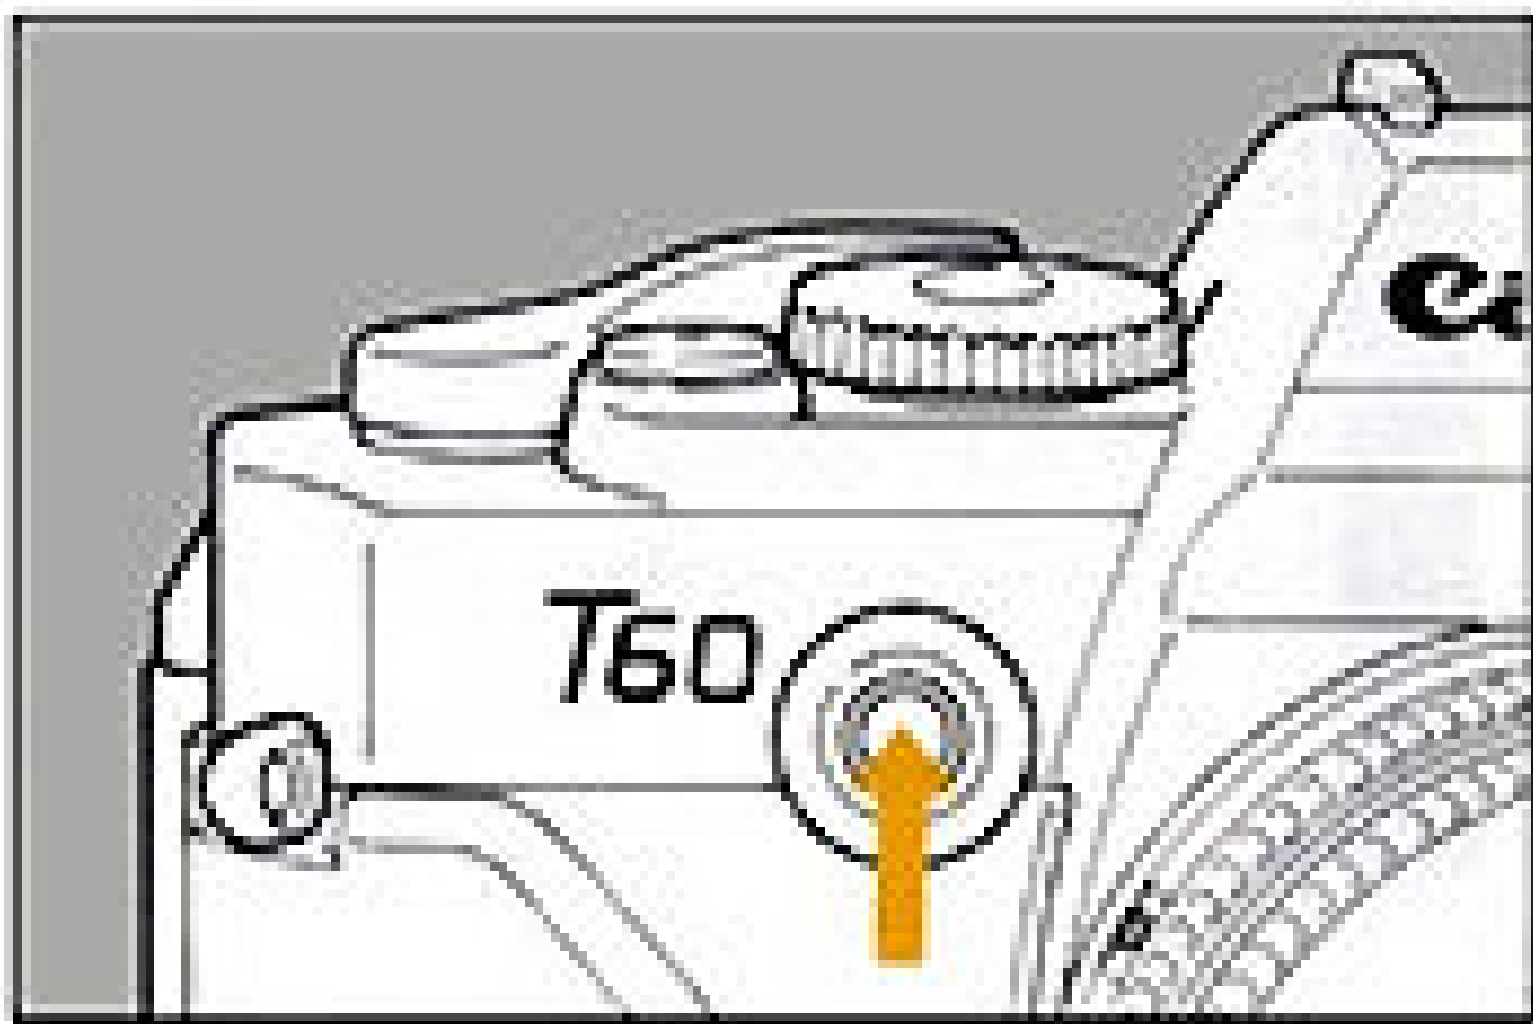


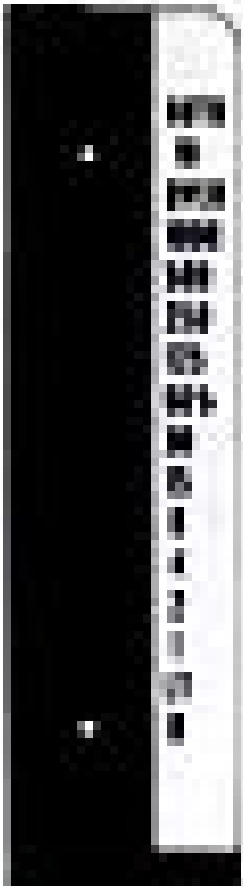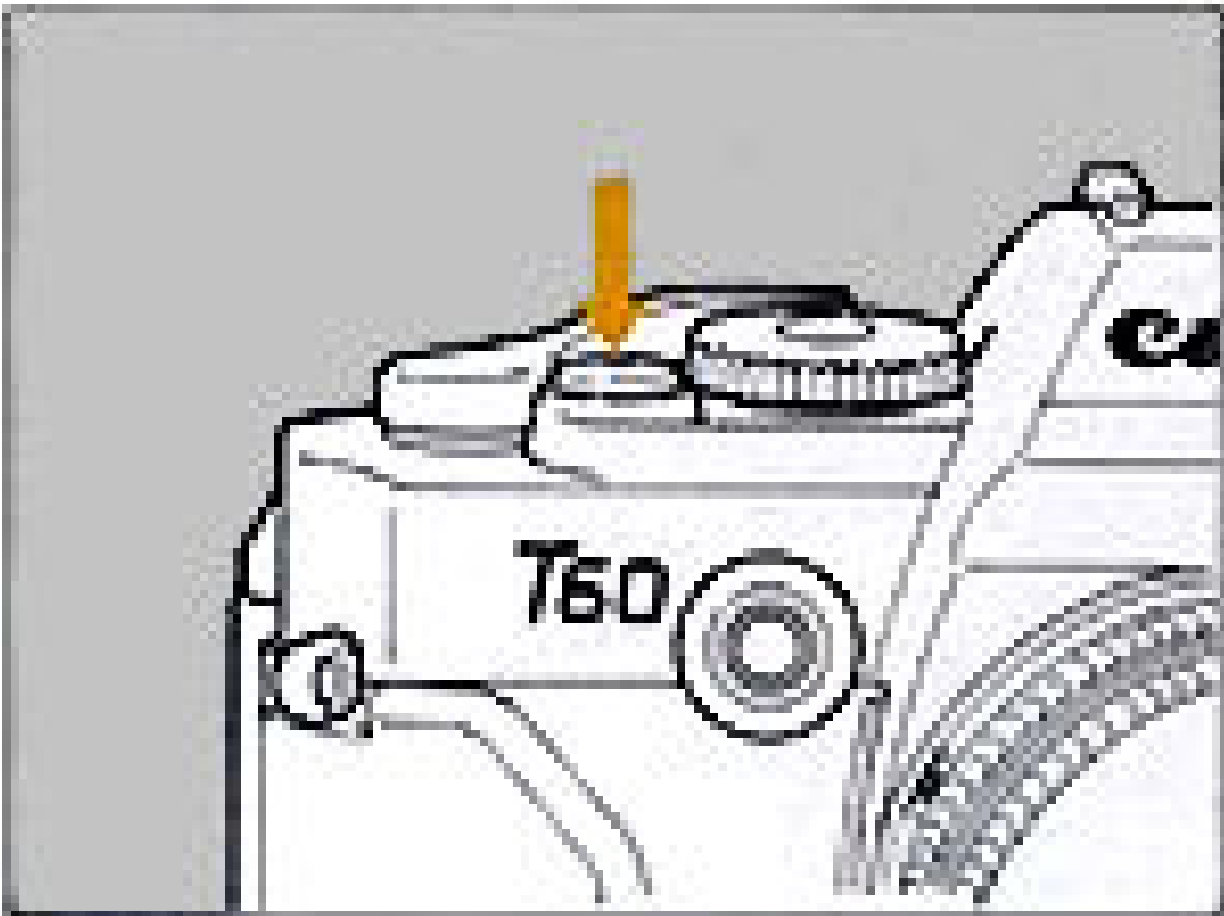

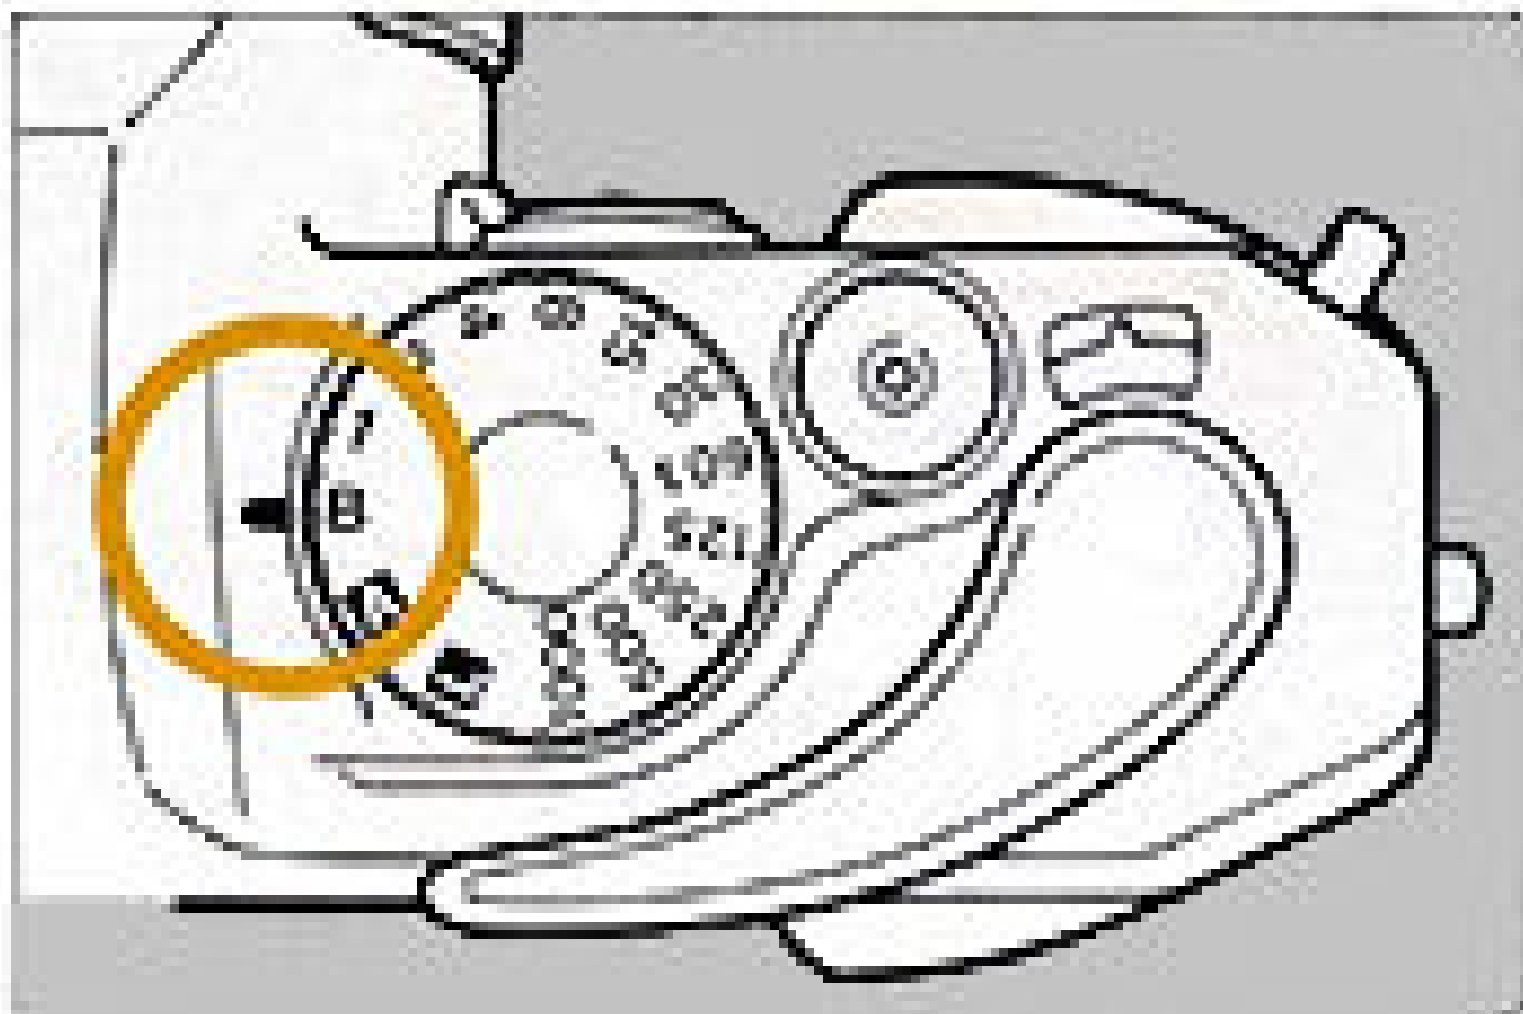



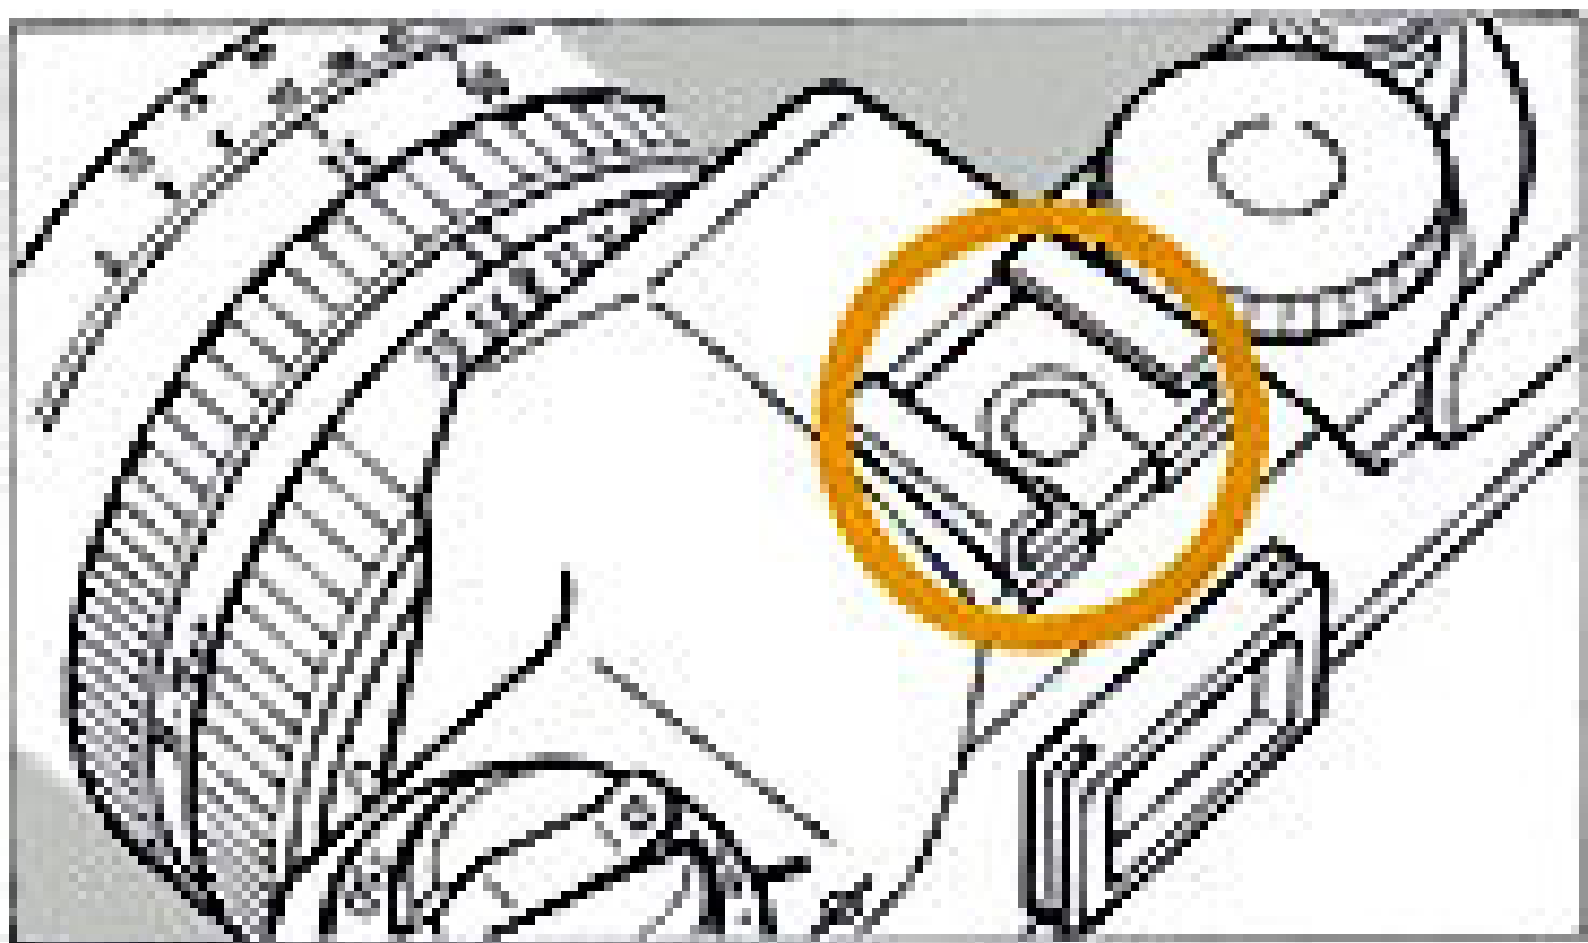

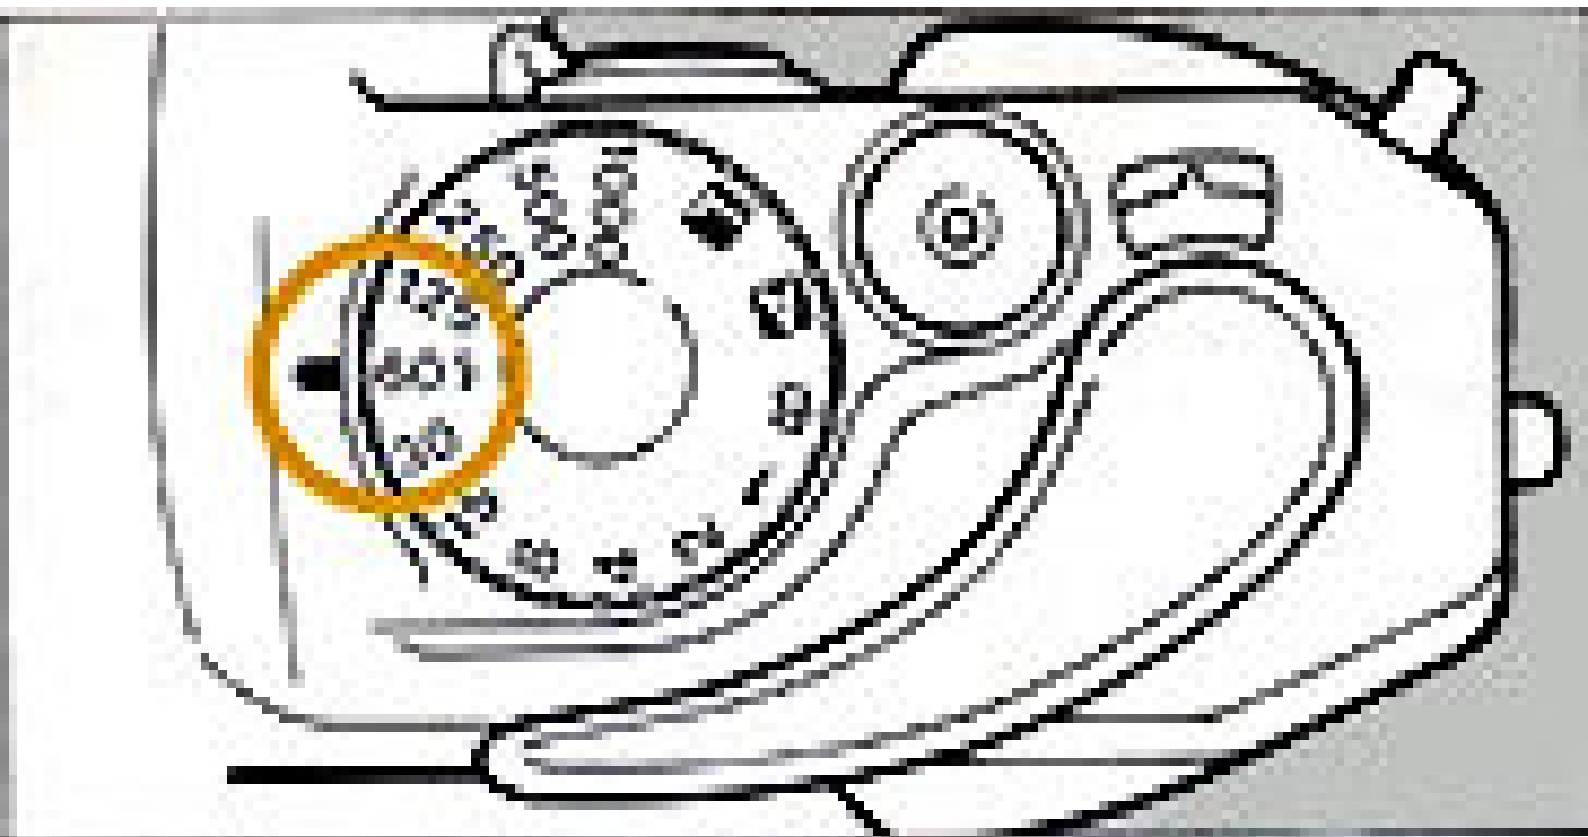



f/4 Small lens aperture number
Shallow depth of field



f/16 Large lens aperture number
Deep depth of field






2. Macro FD 50 mm 1/3.5





1. FD 28 mm f/2.8



3. FD 35-70 mm f/3.5-4.5

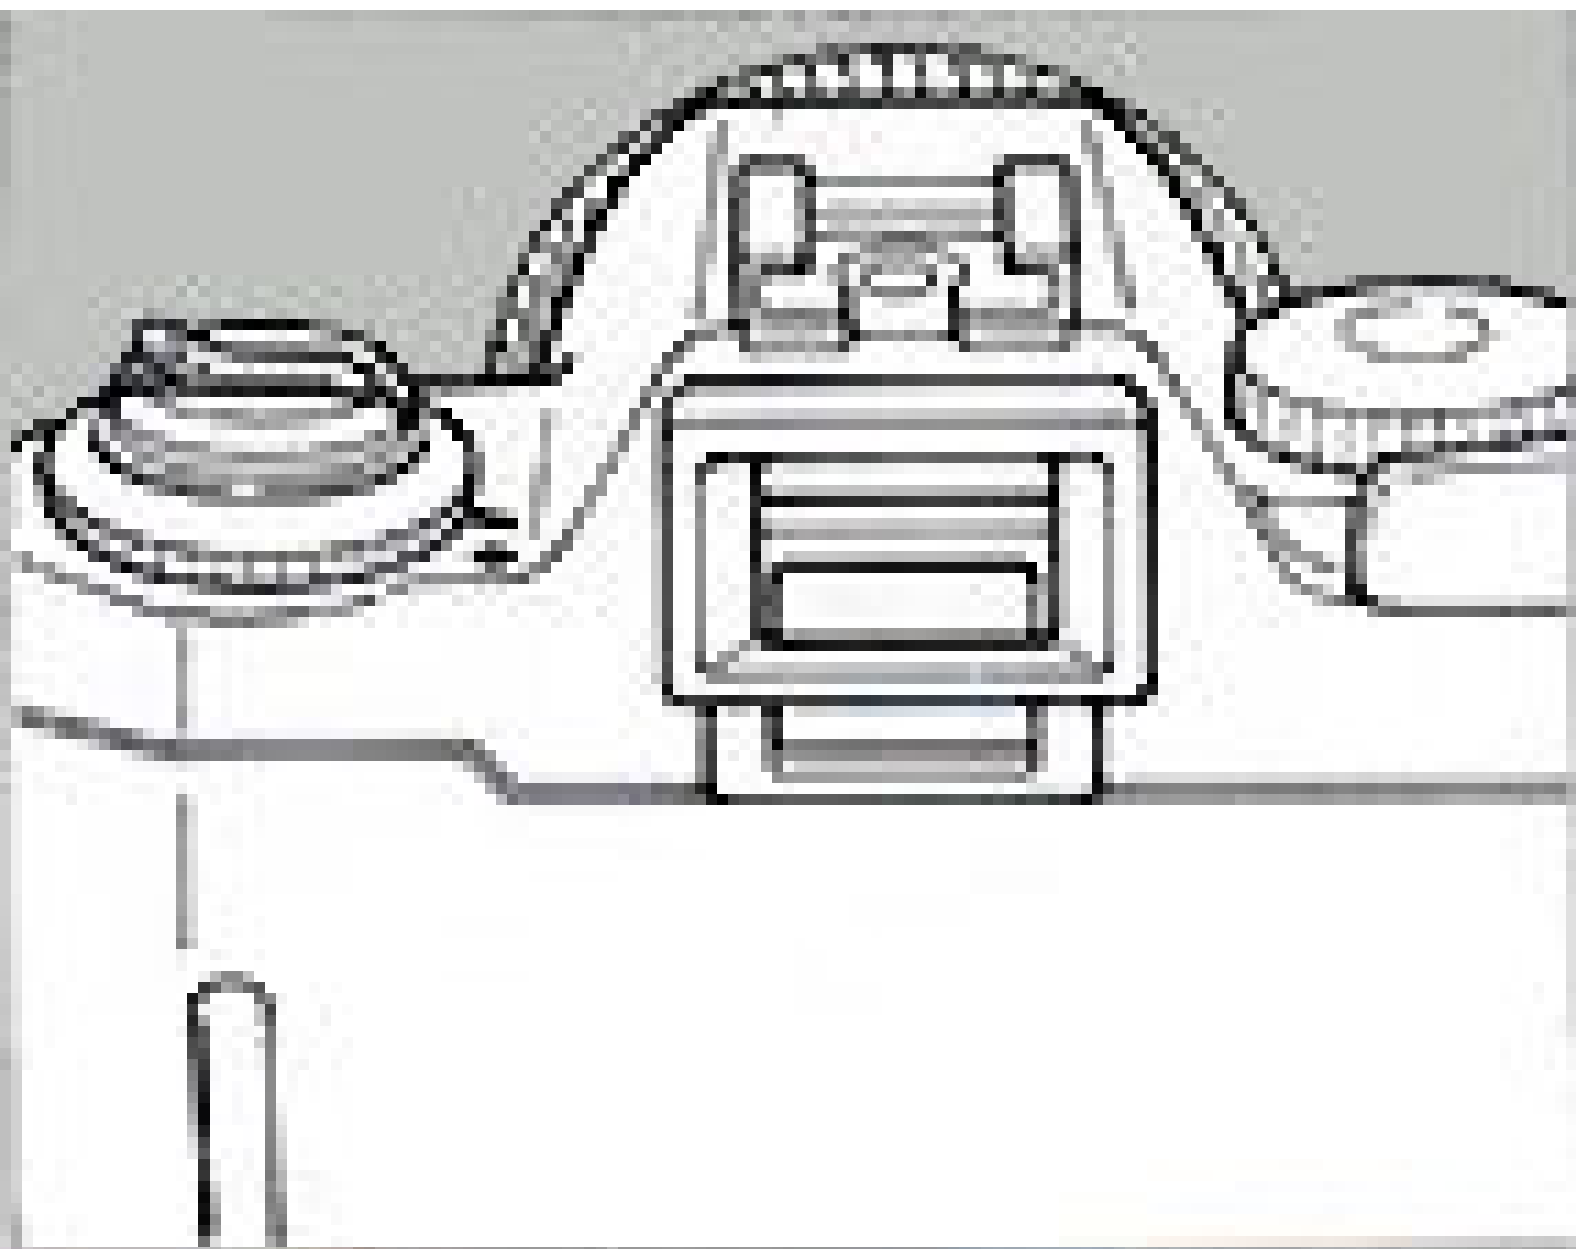

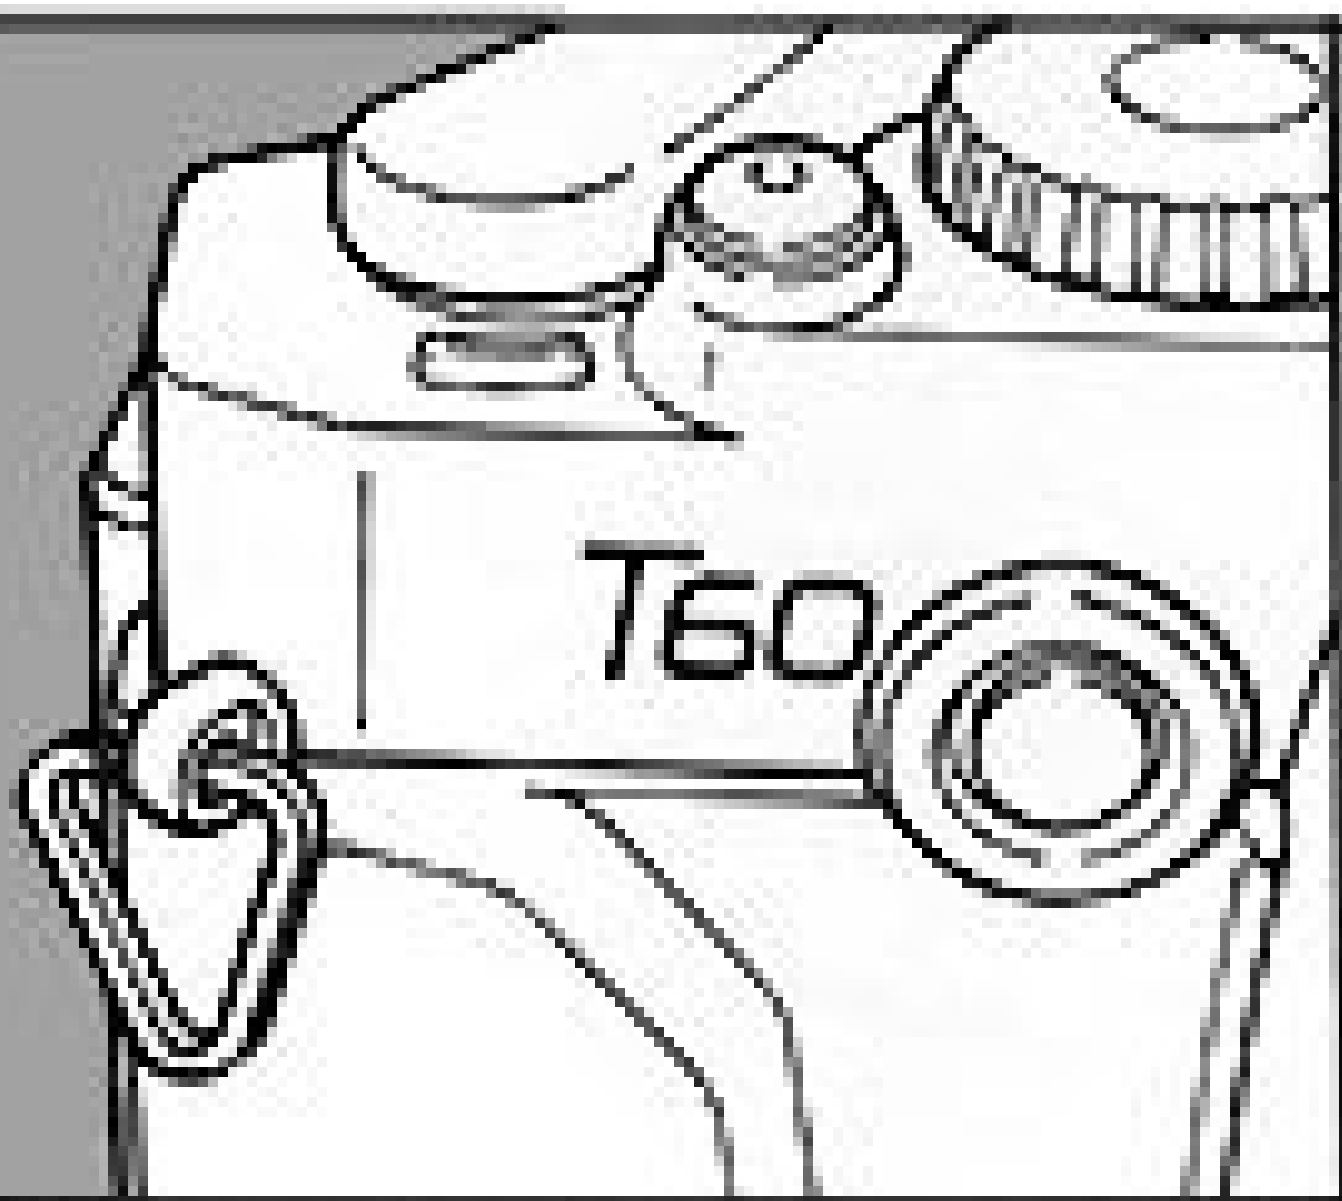

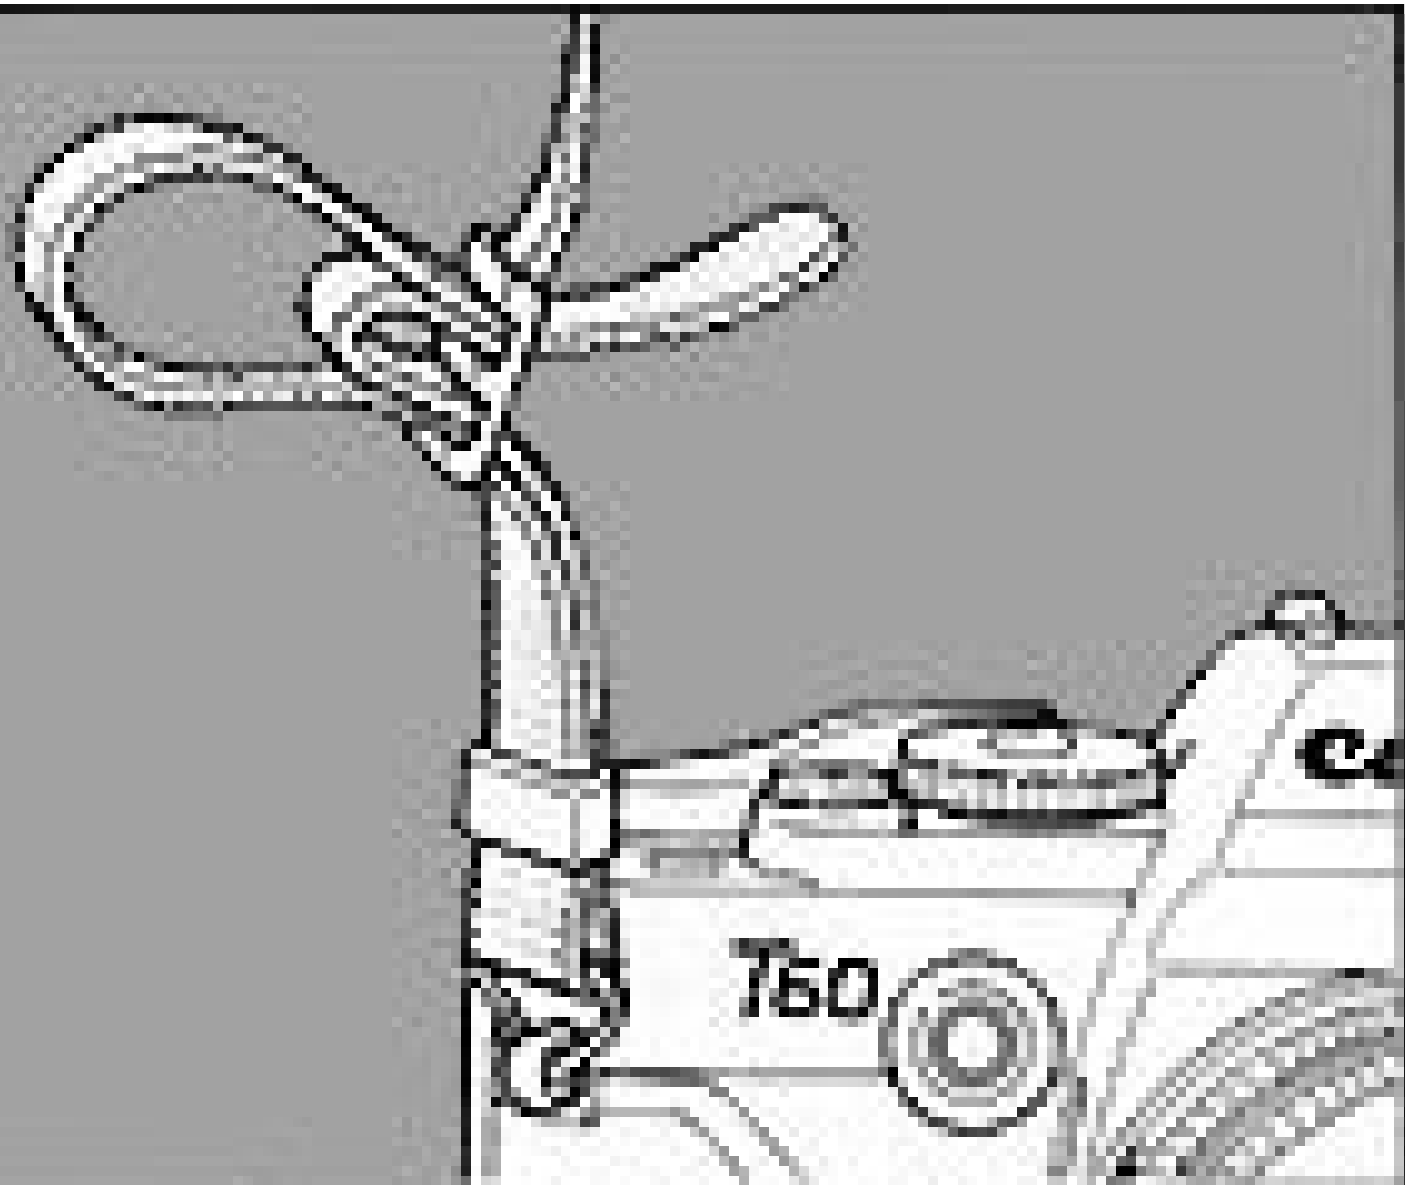




5.6




250

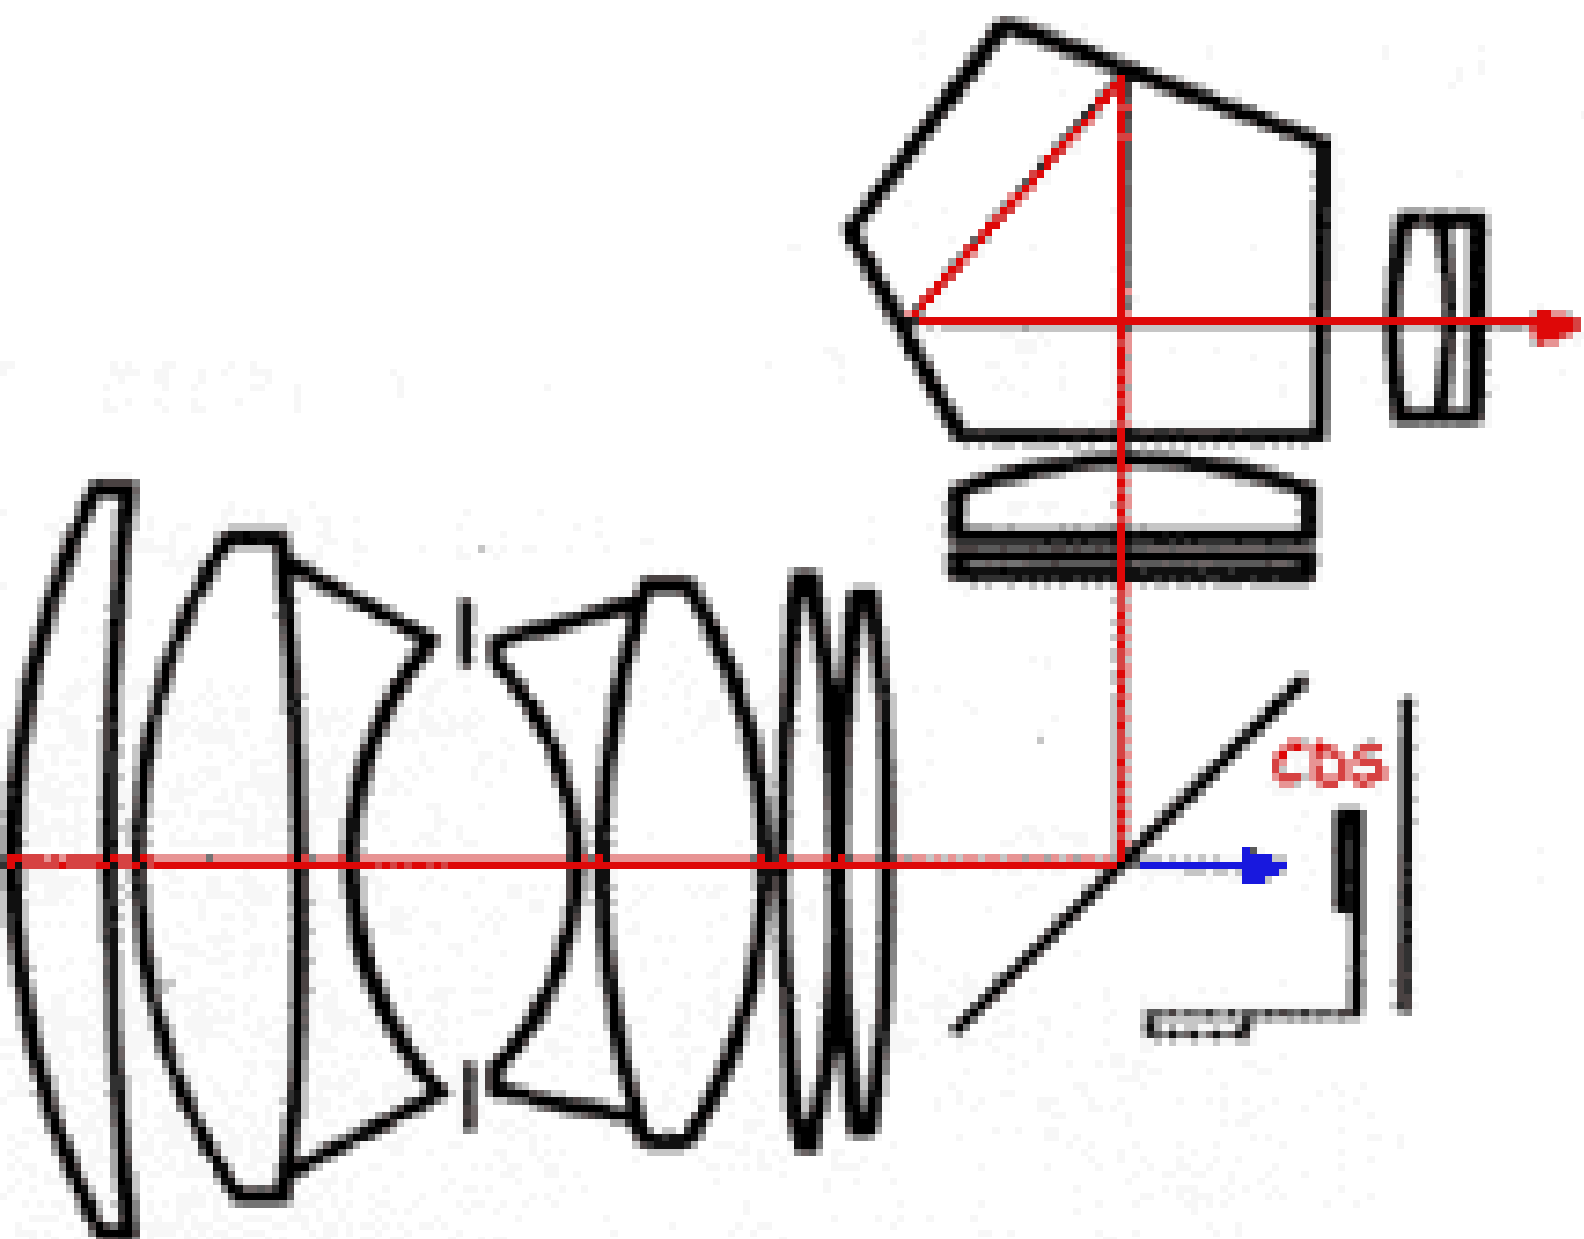









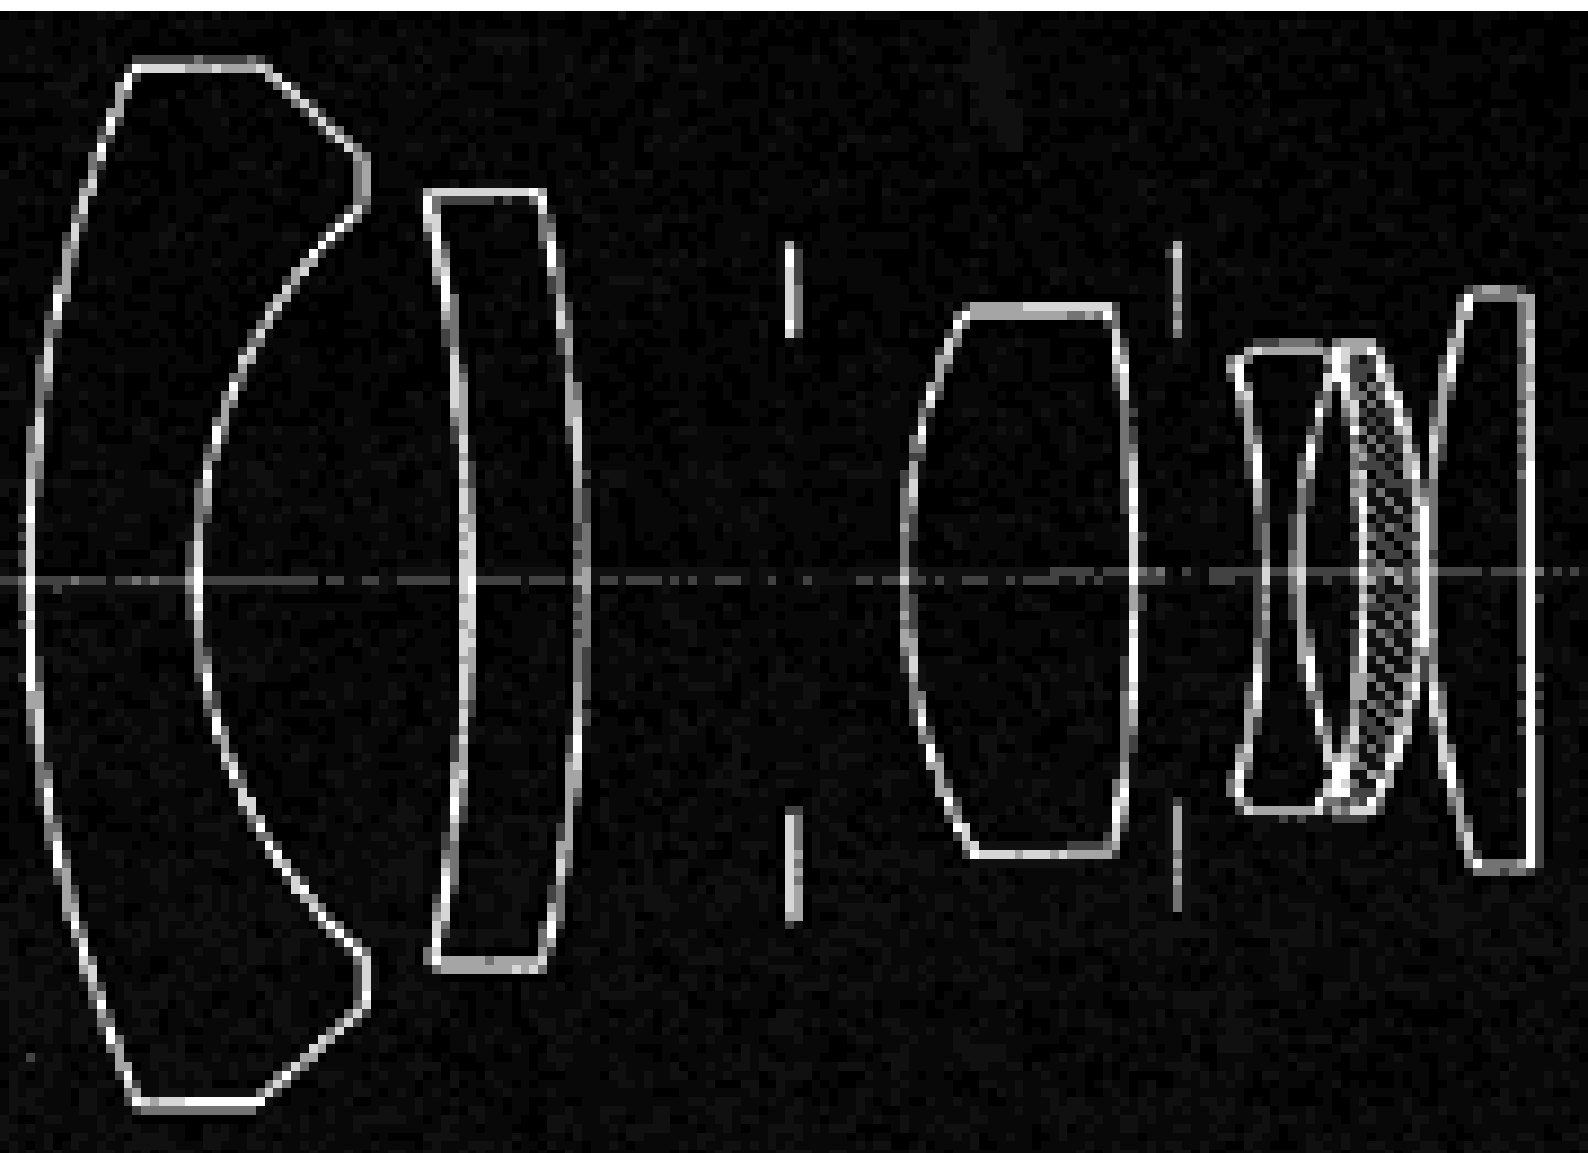


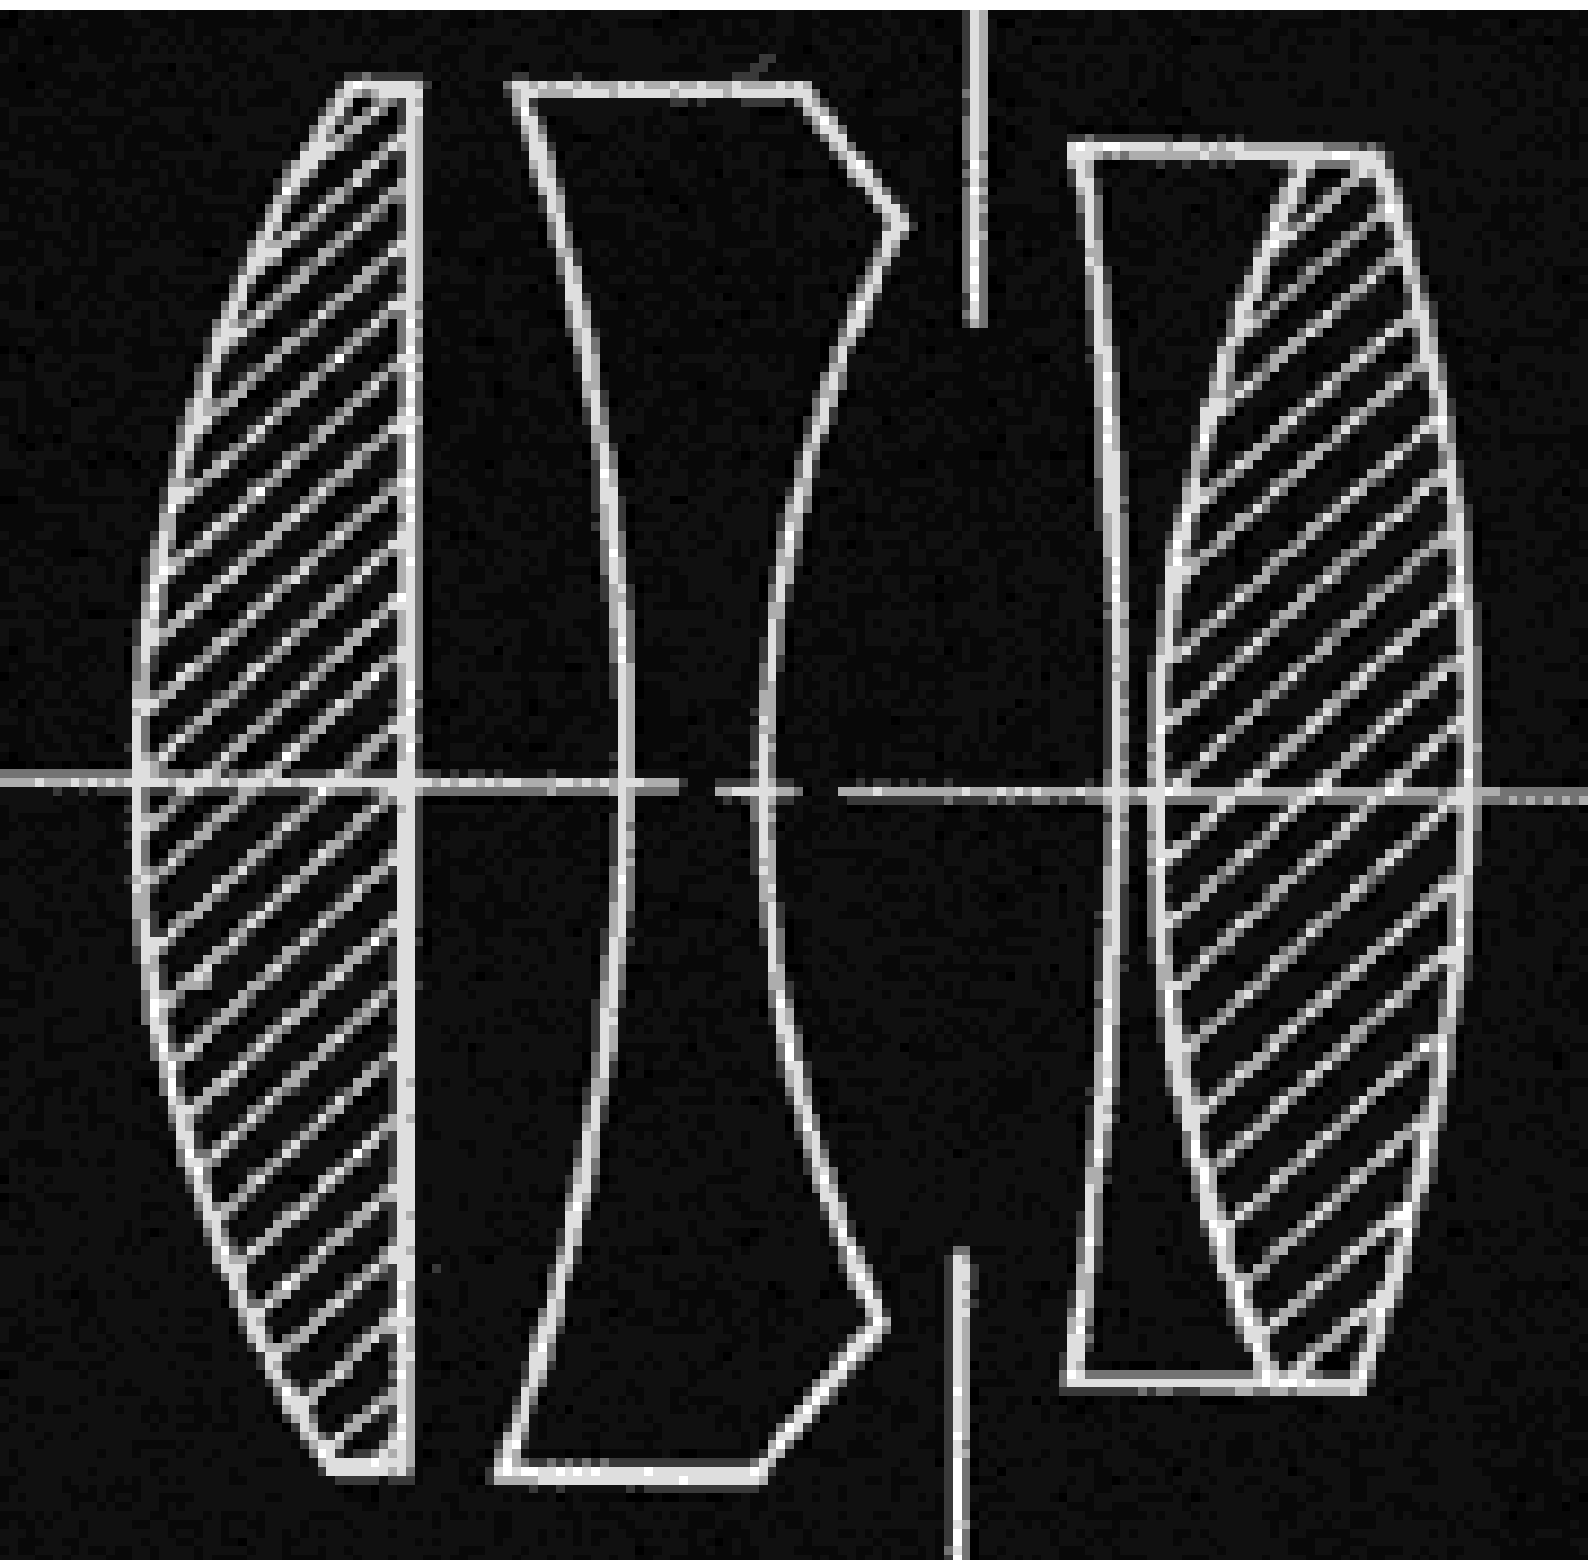

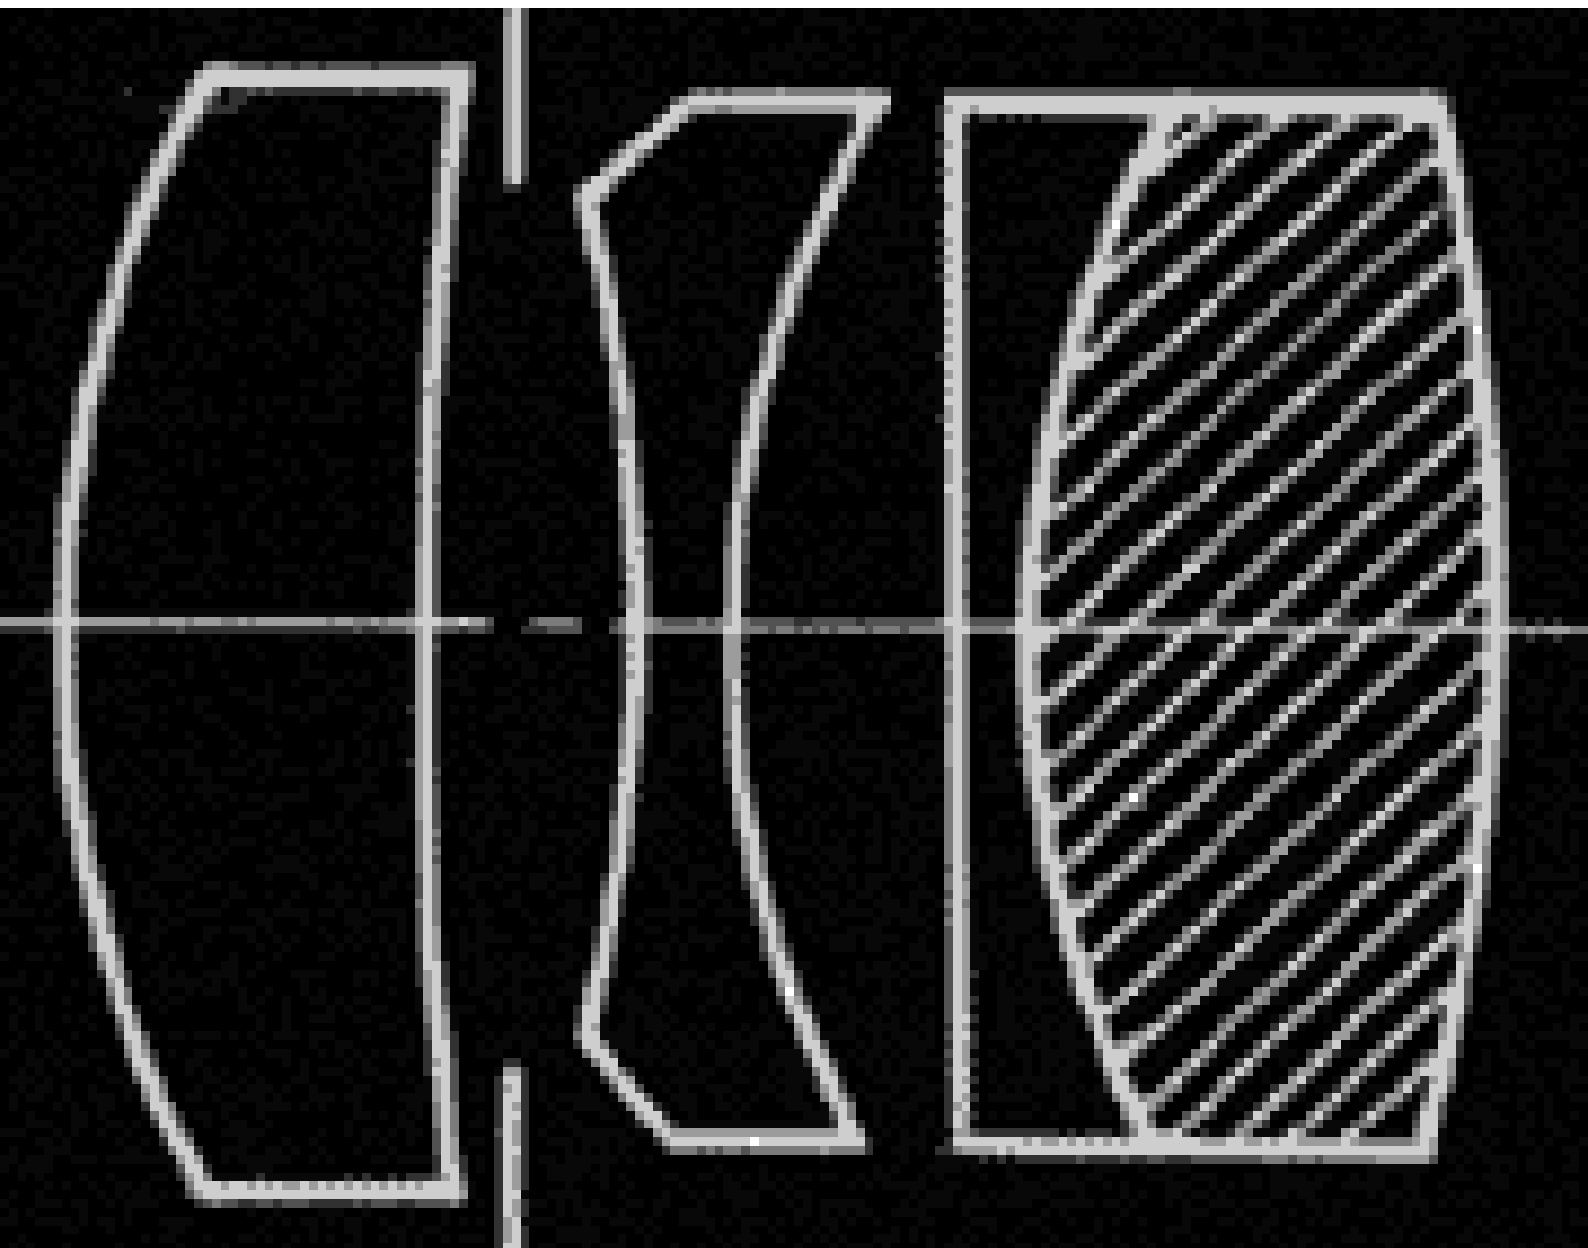





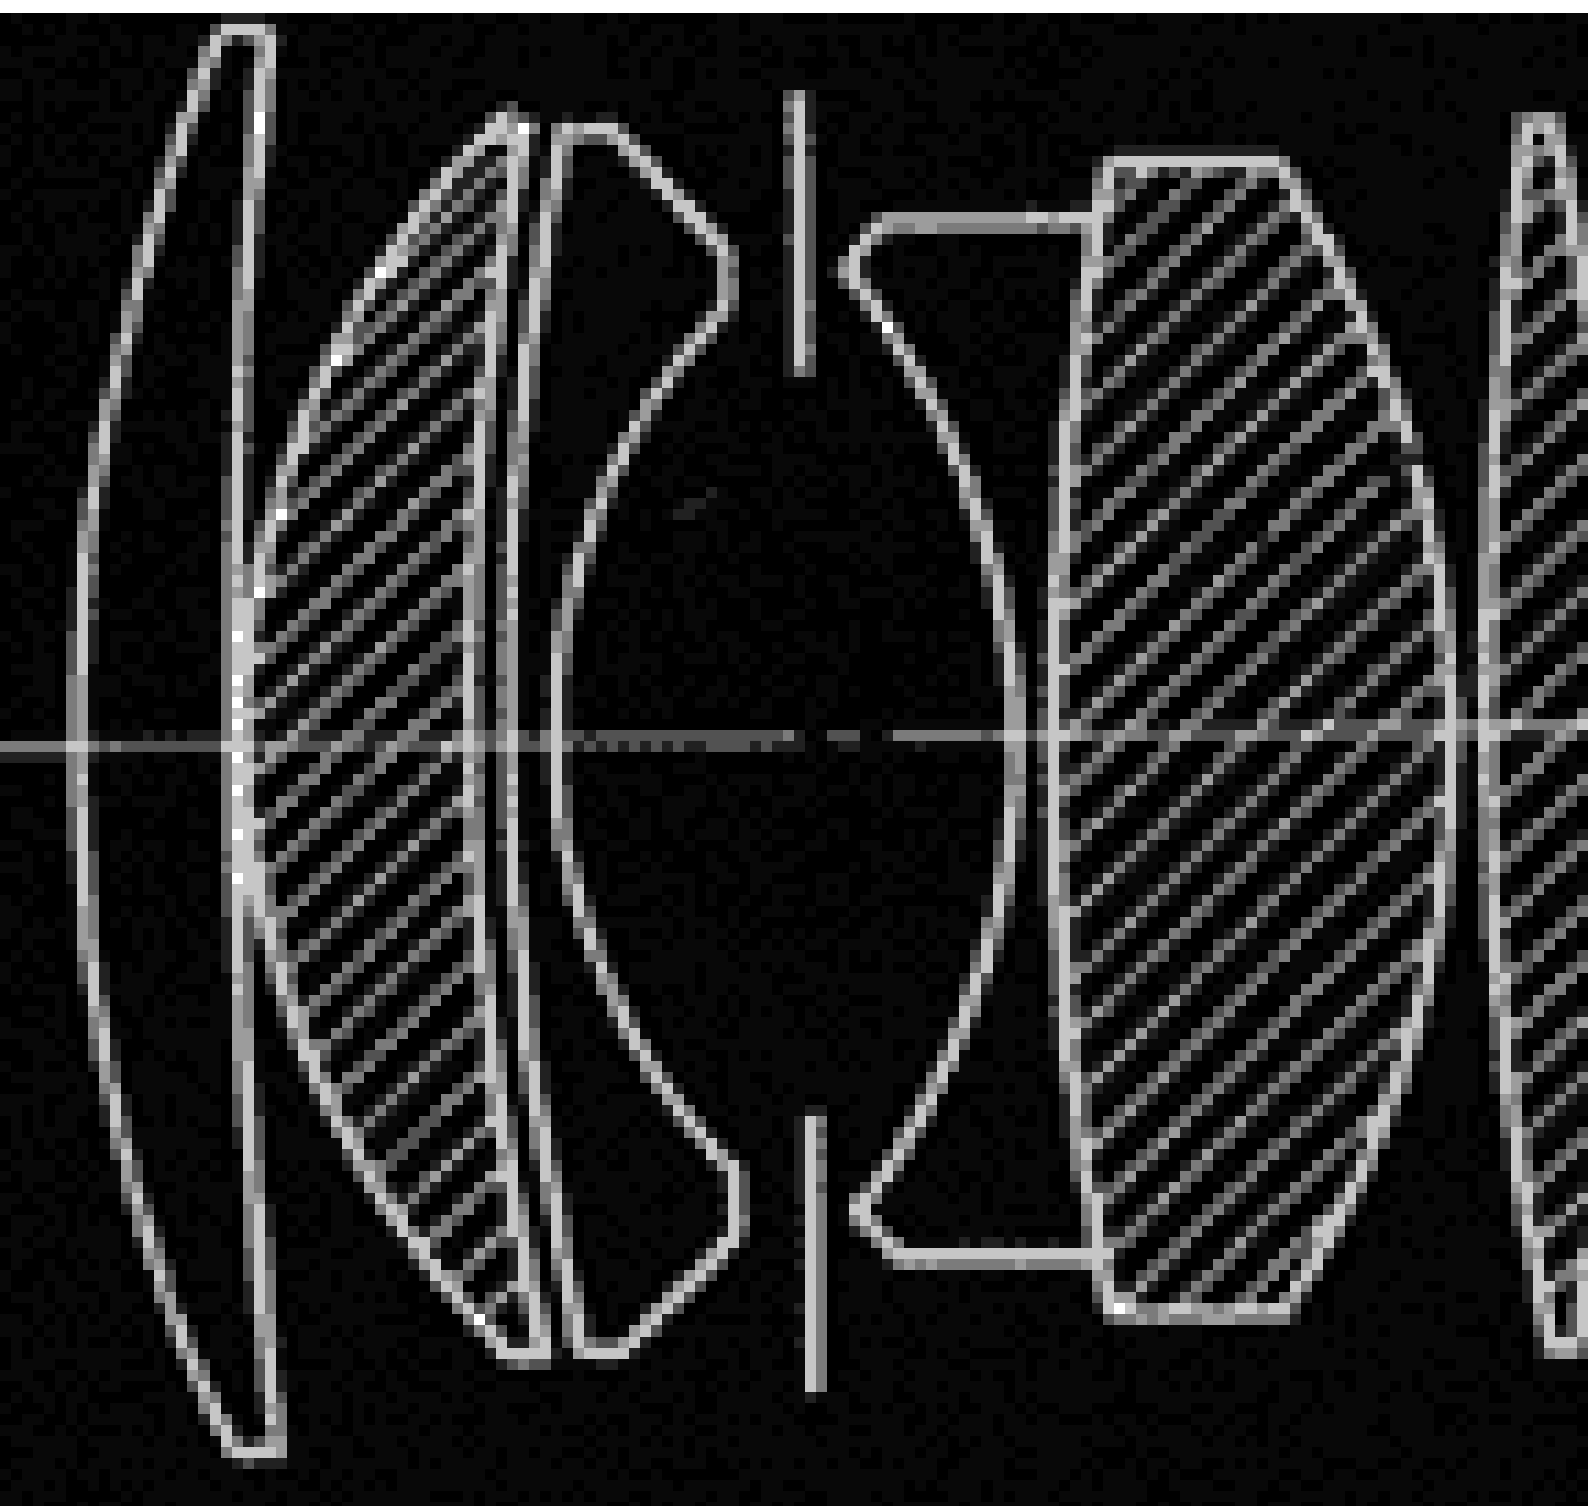

























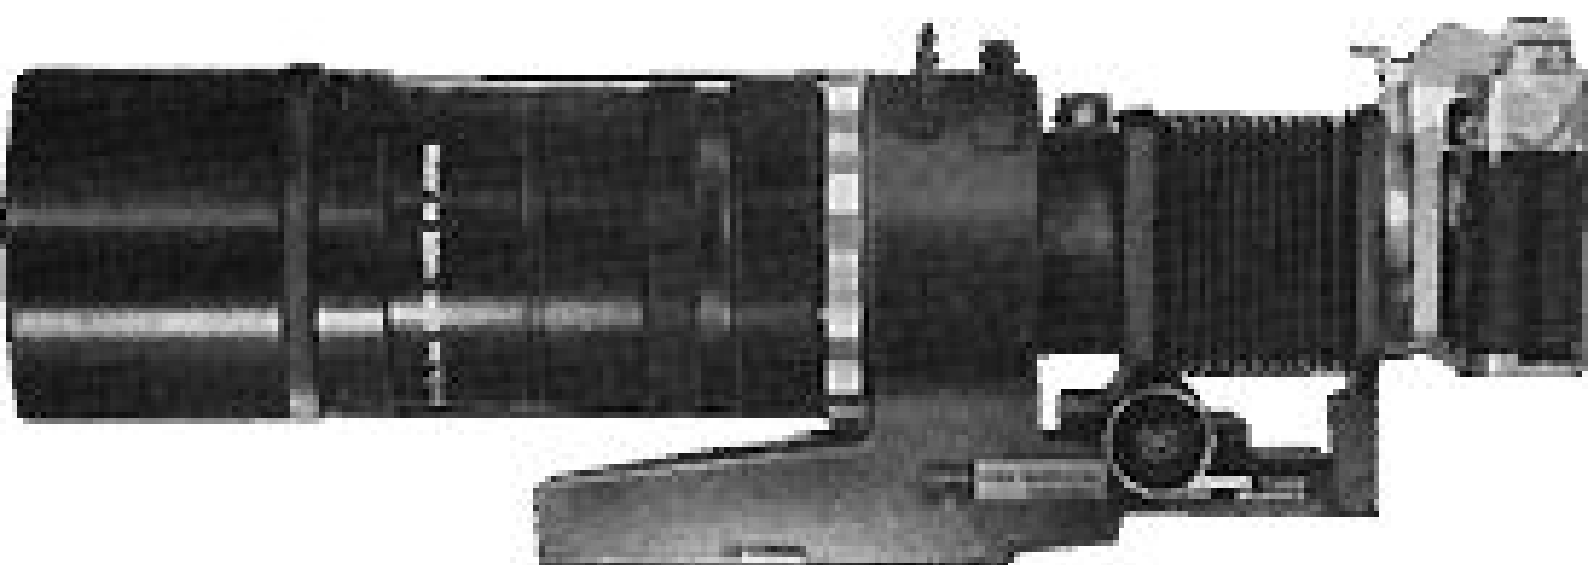




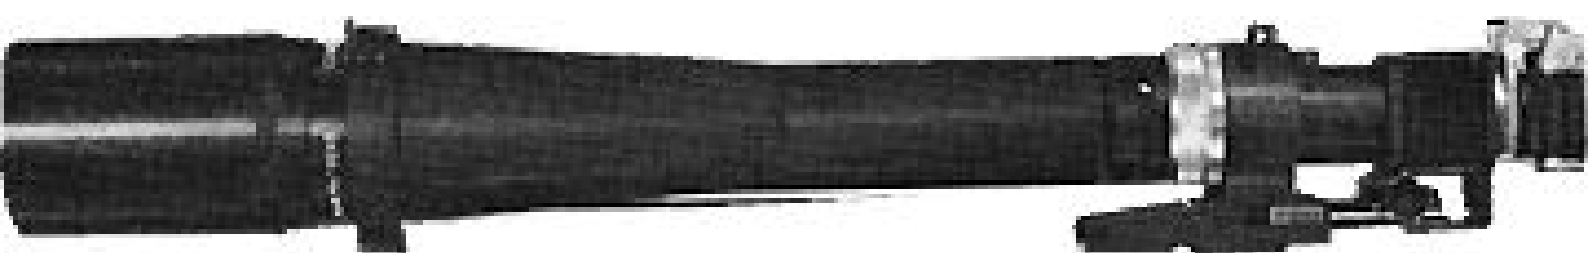






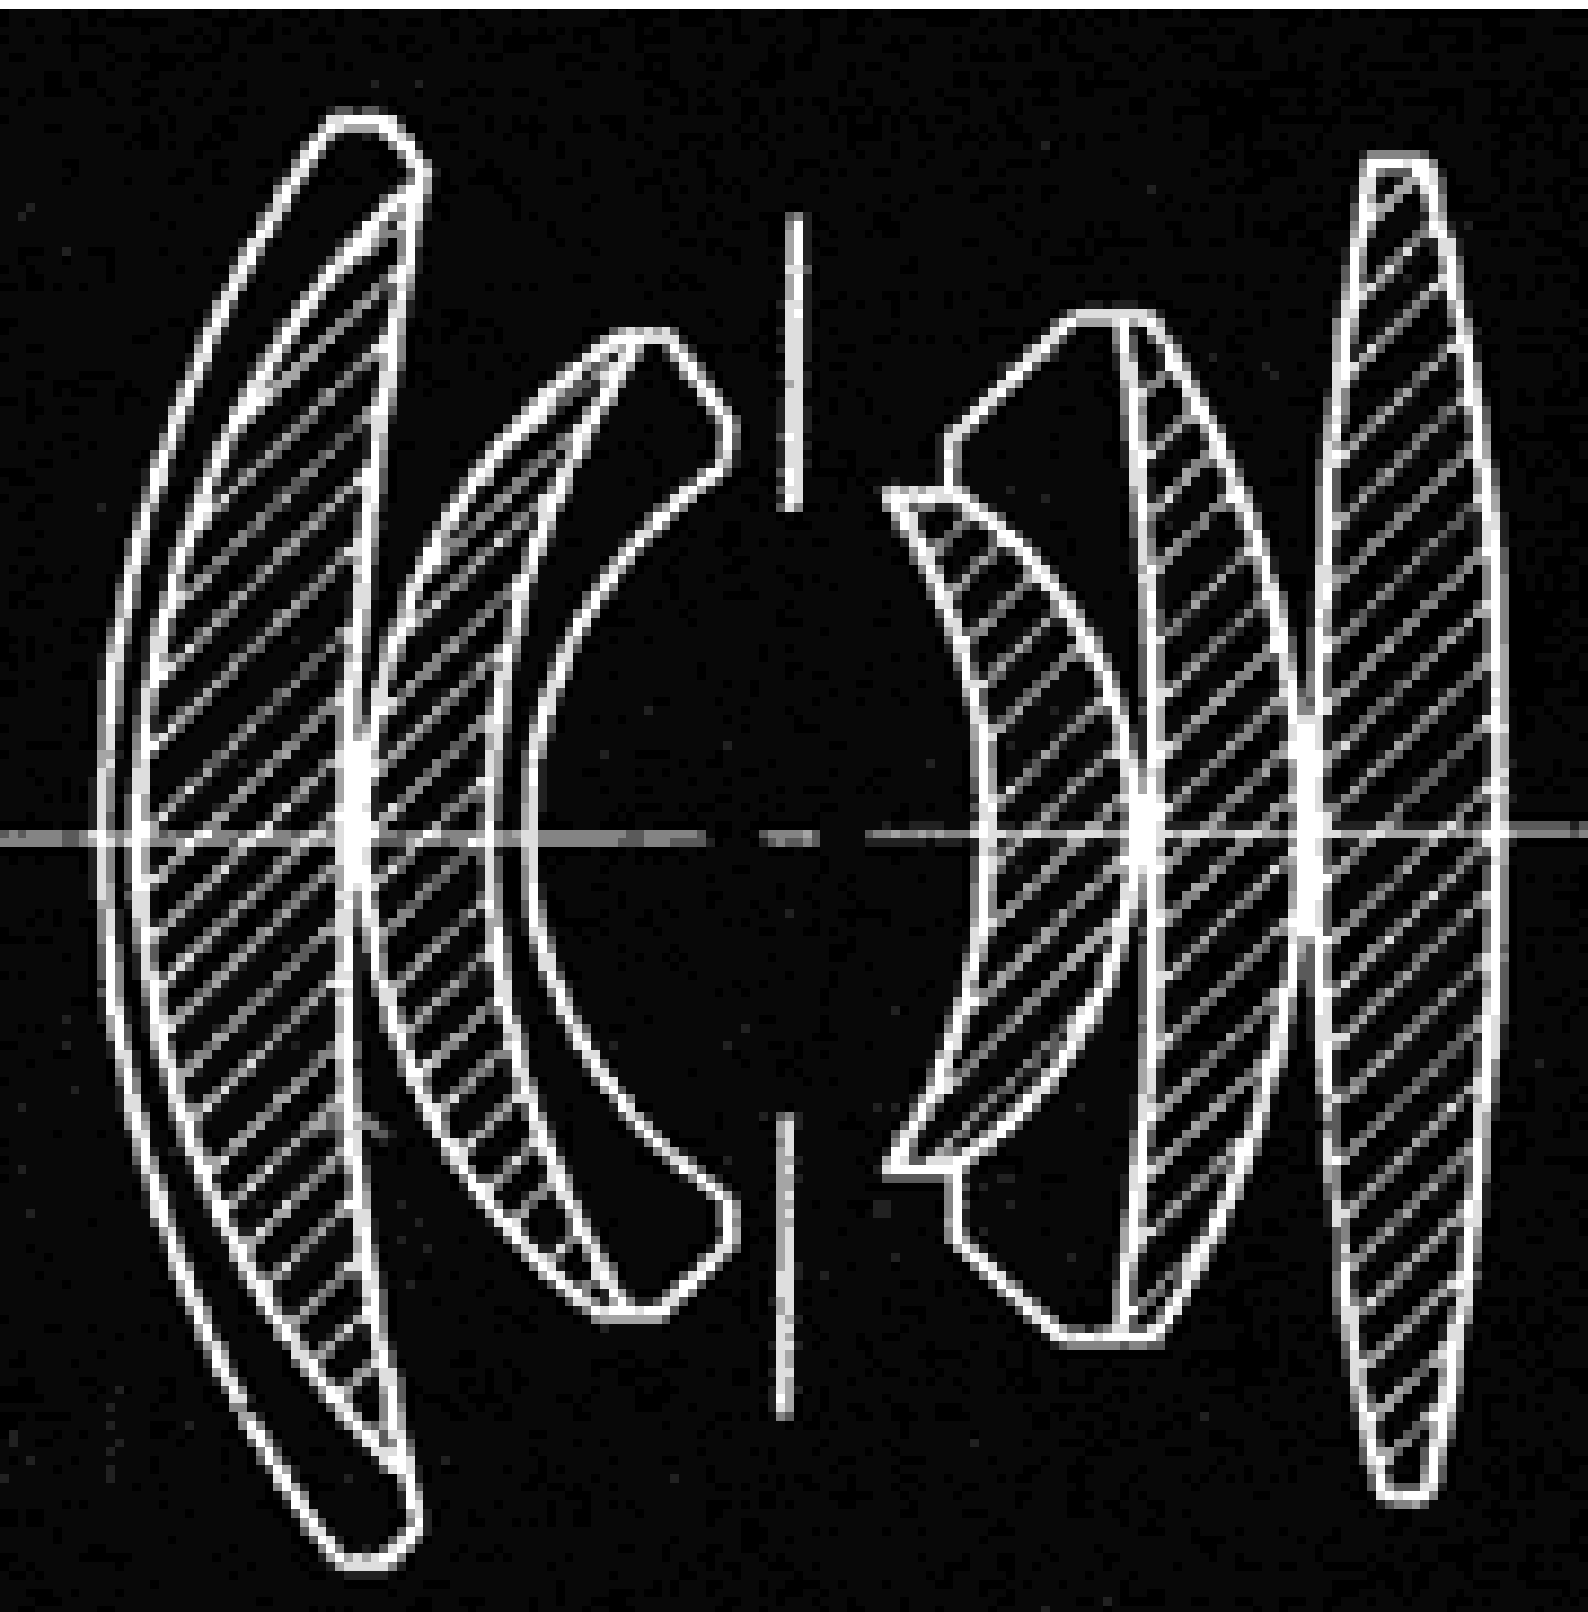







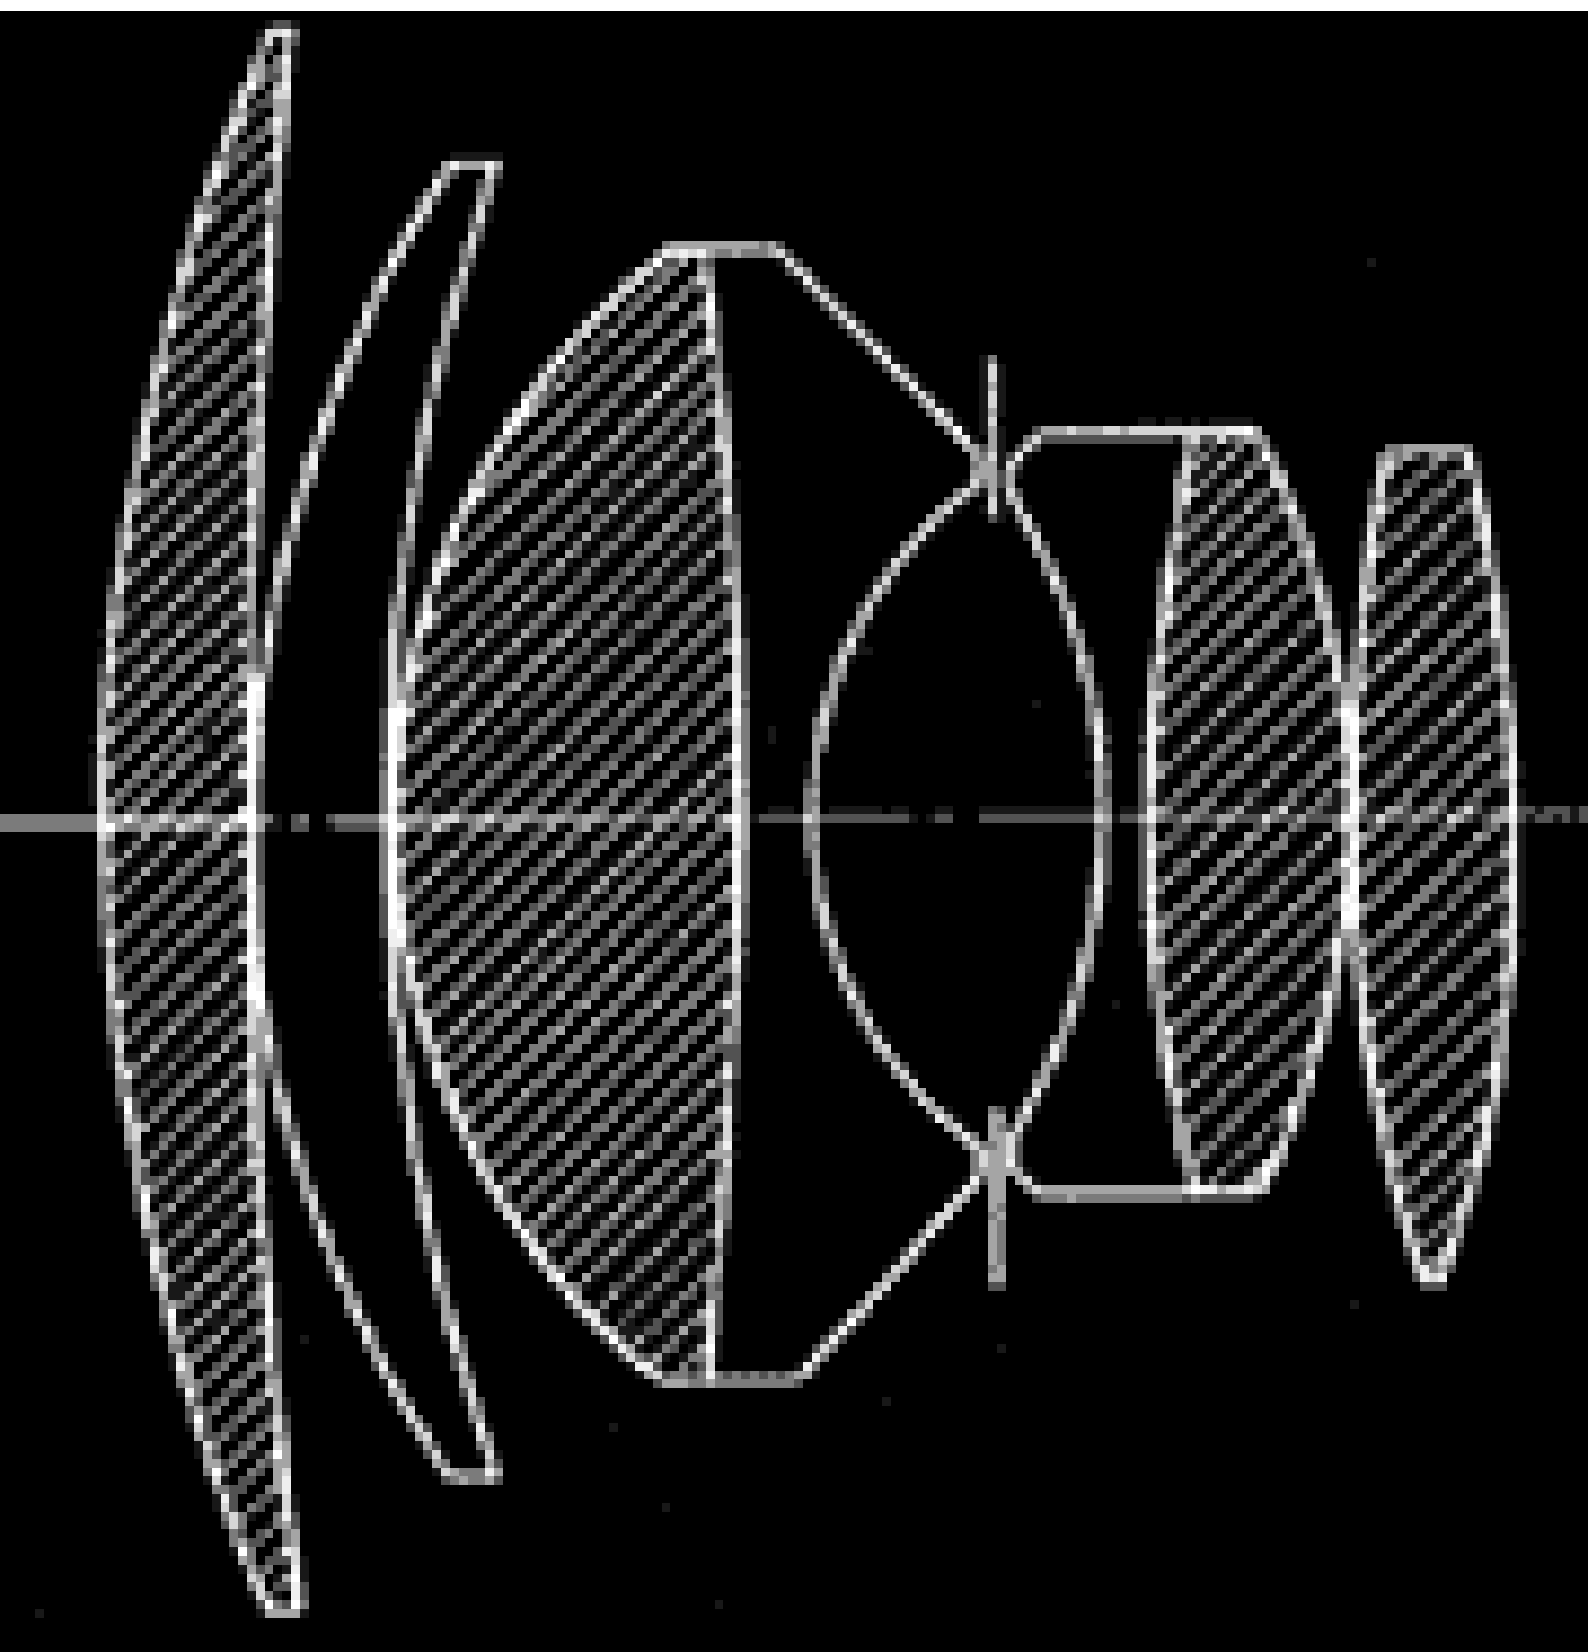







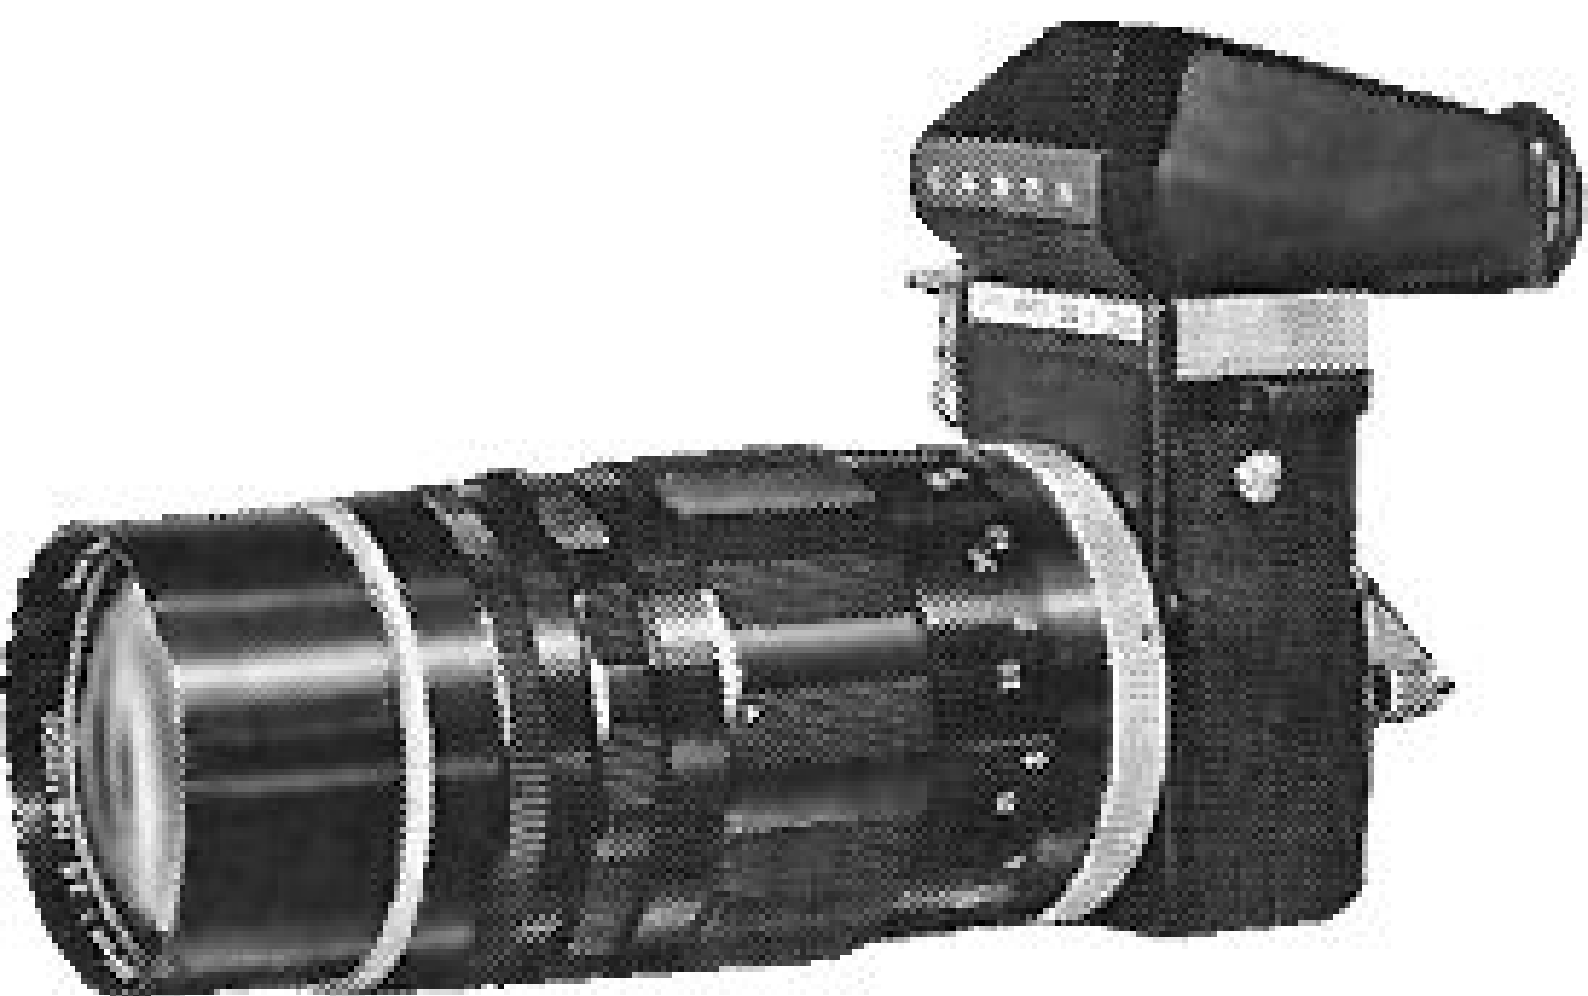

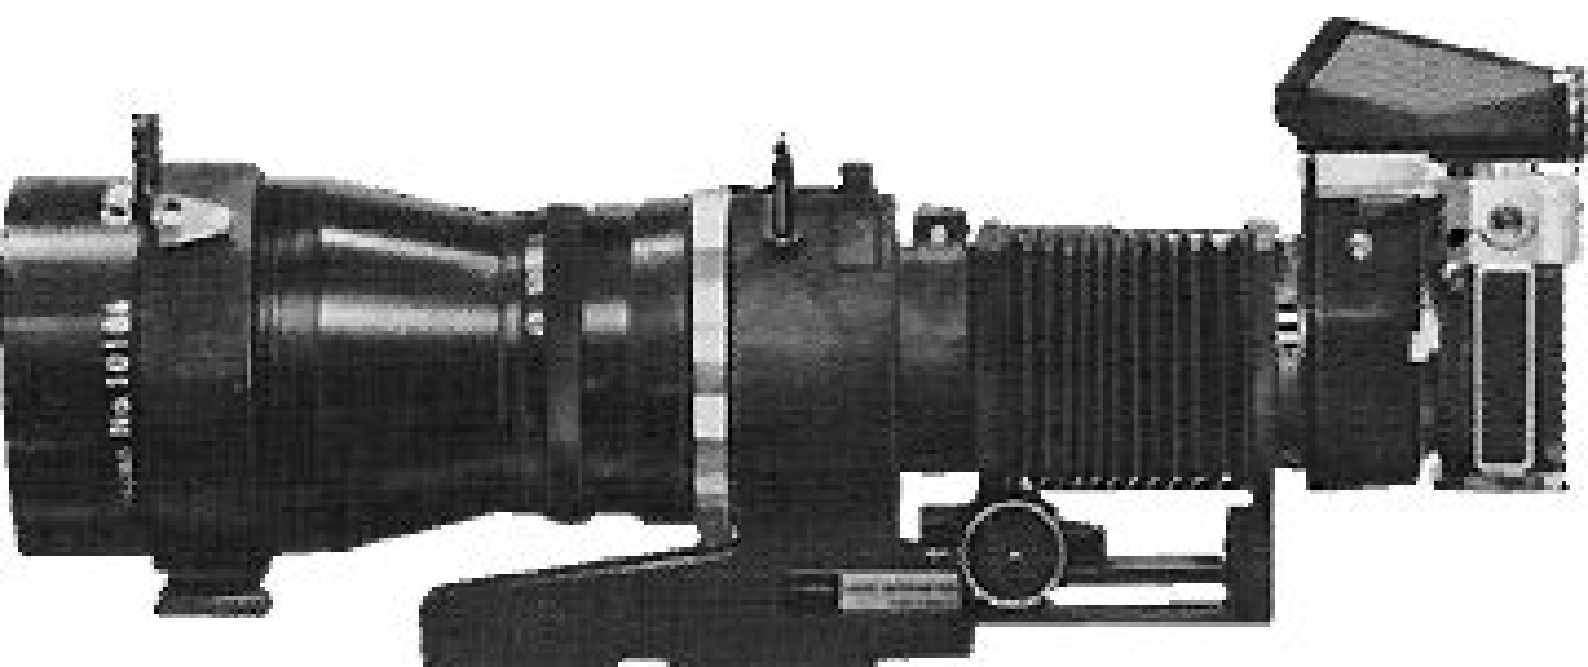

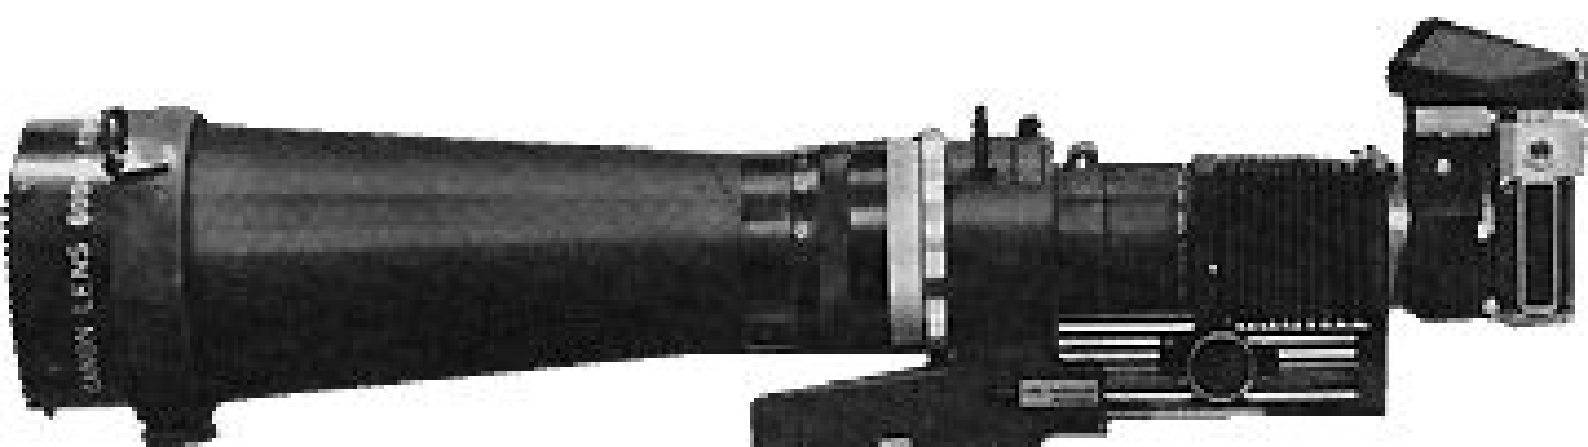

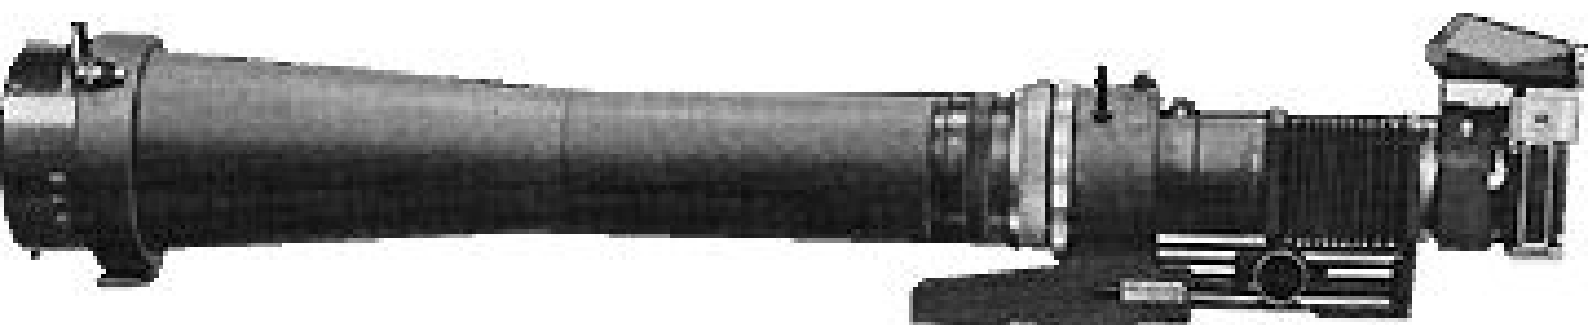



























SERBIAN WOMAN























Camera attaching screw

Attaching hole for
Nikon F
Nikon F Photomic TN
Nikon Photomic FTN
Cordless connected
Power pack for
motor drive F 36
Nikkormat F.s.f T
and FTN

Bracket holder

Positioning
pin

Attaching hole for
motor drive F 36

Bracket **4**


Bracket fastening screw

Angle adjusting hole

Band


Band fastening screw



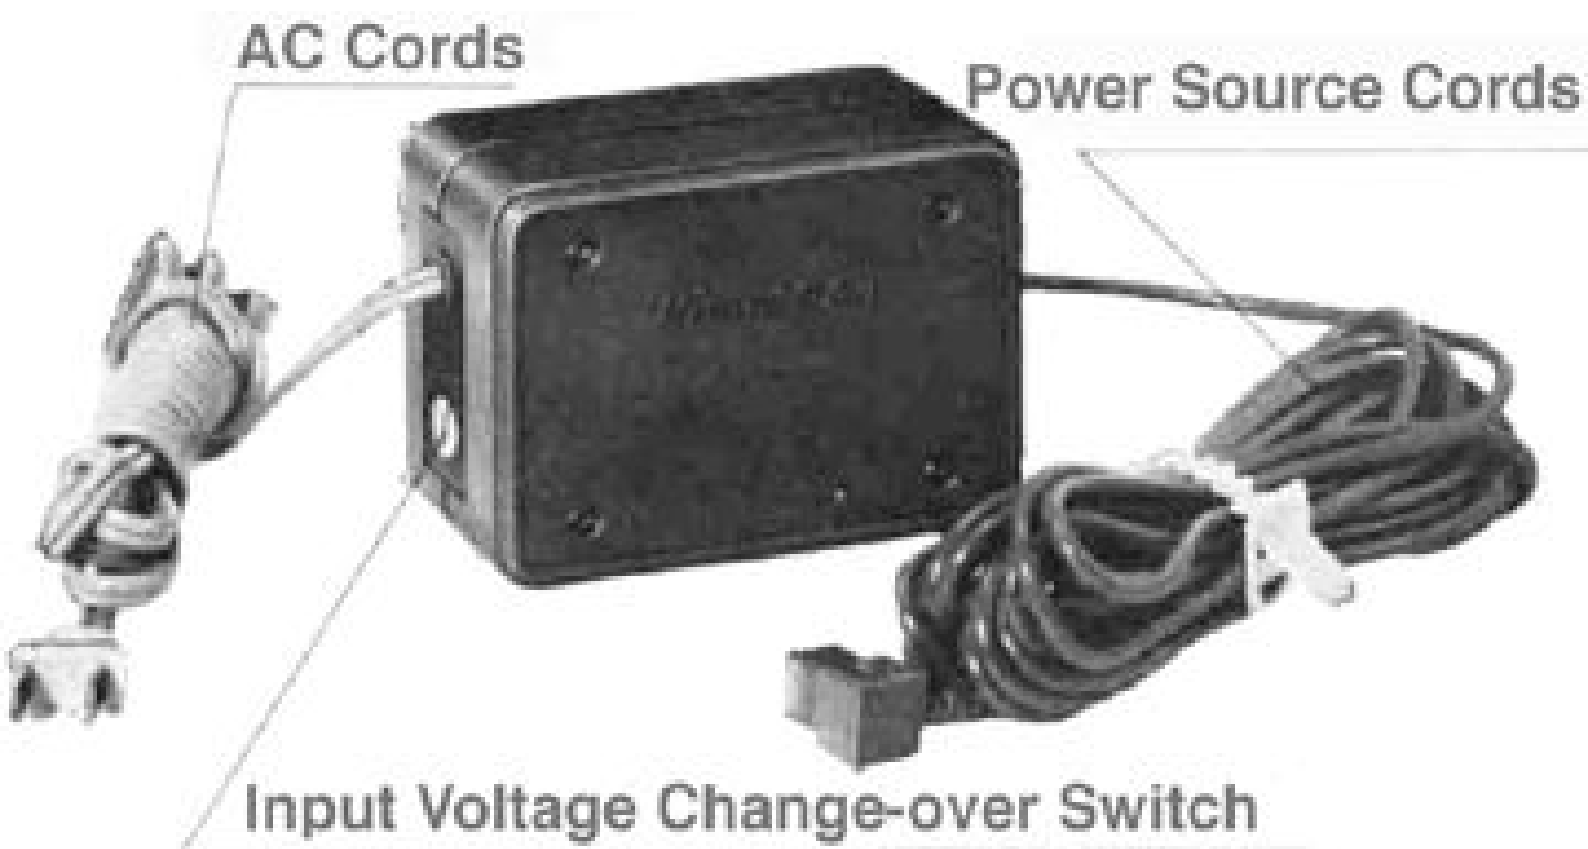






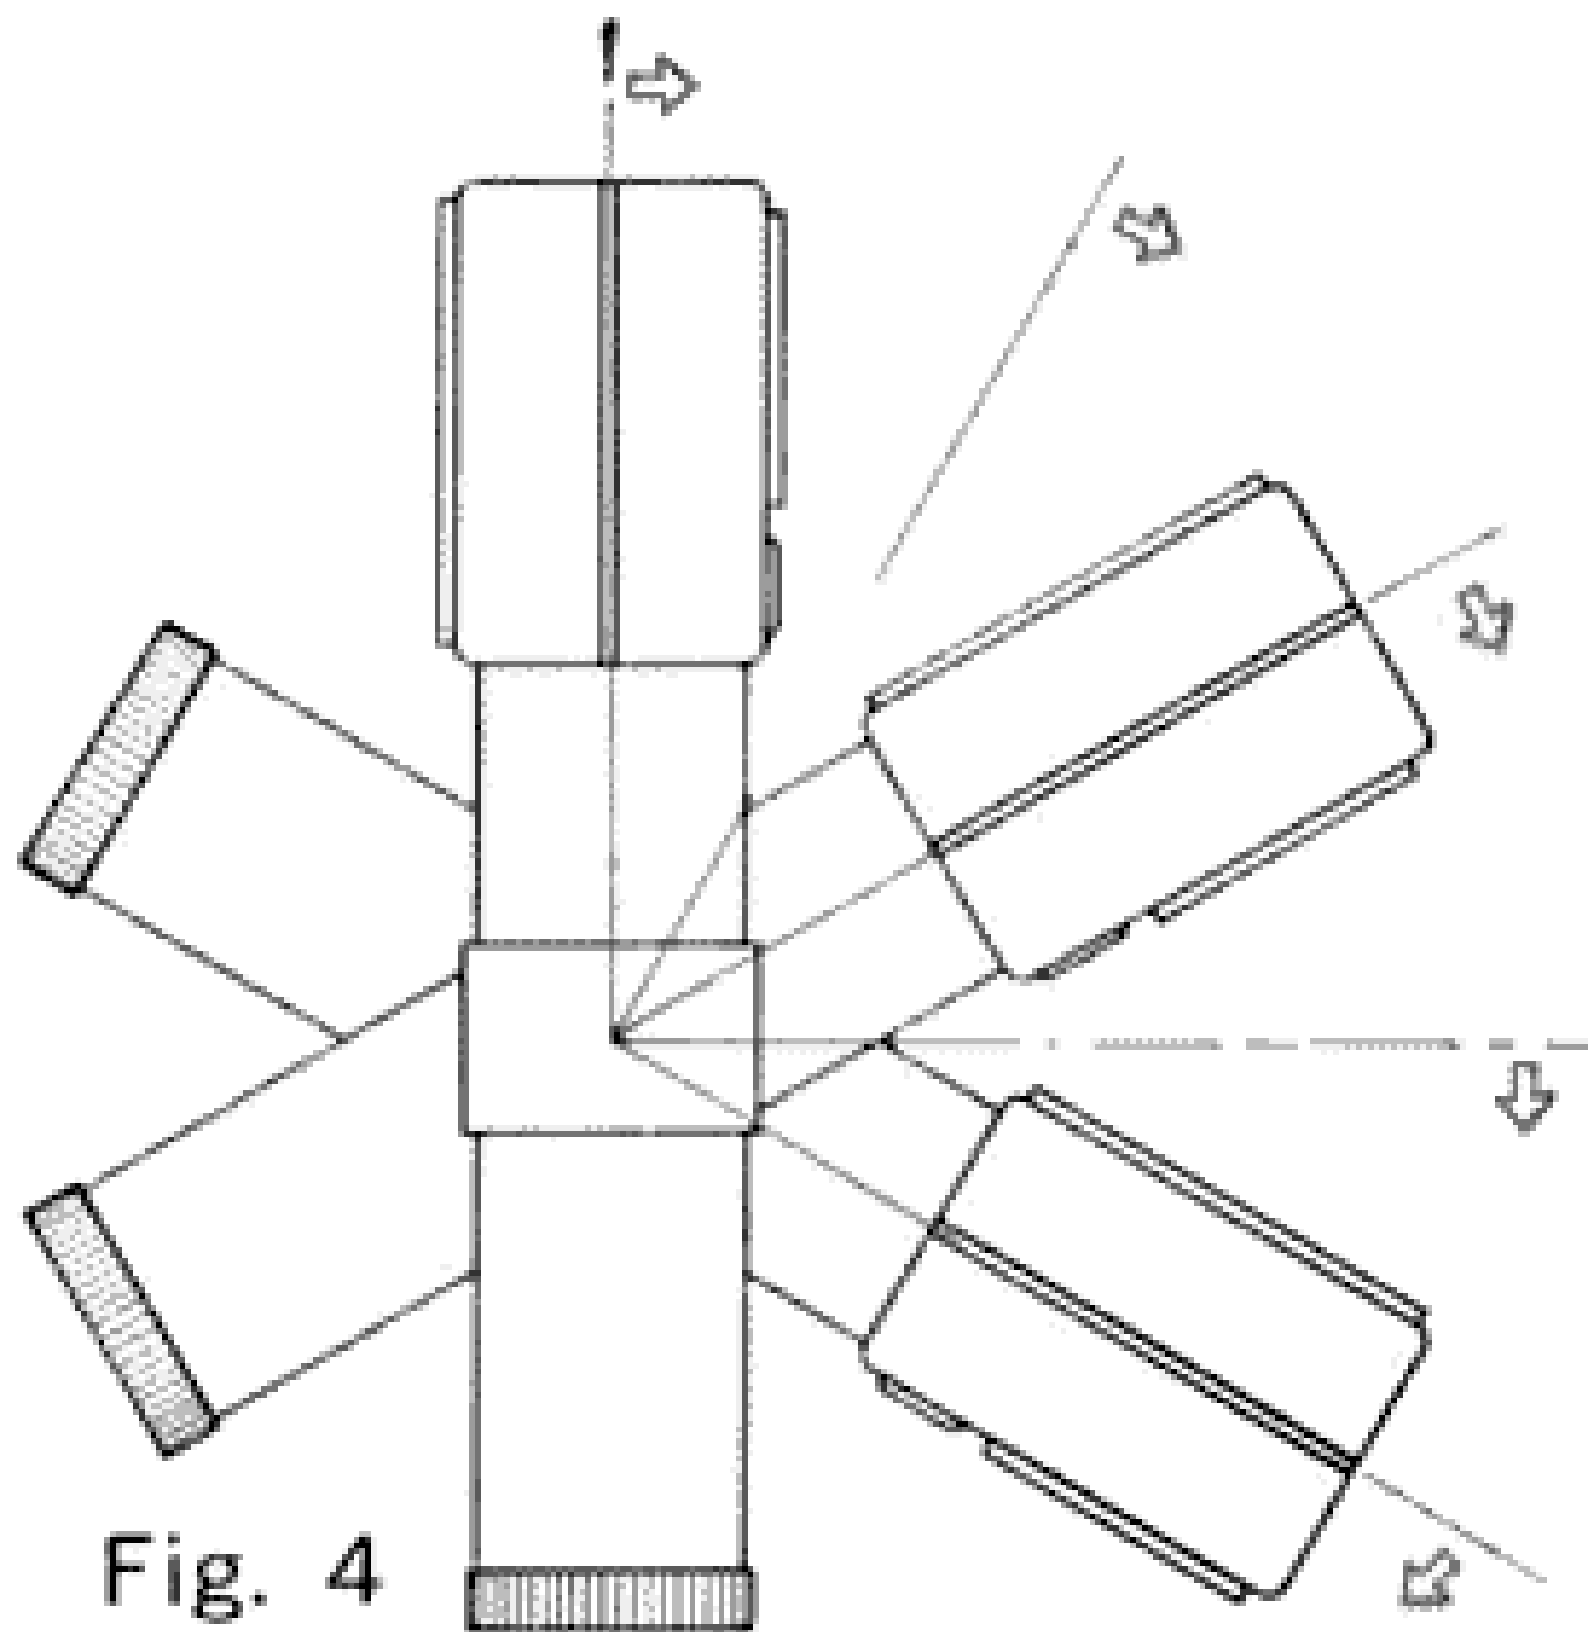



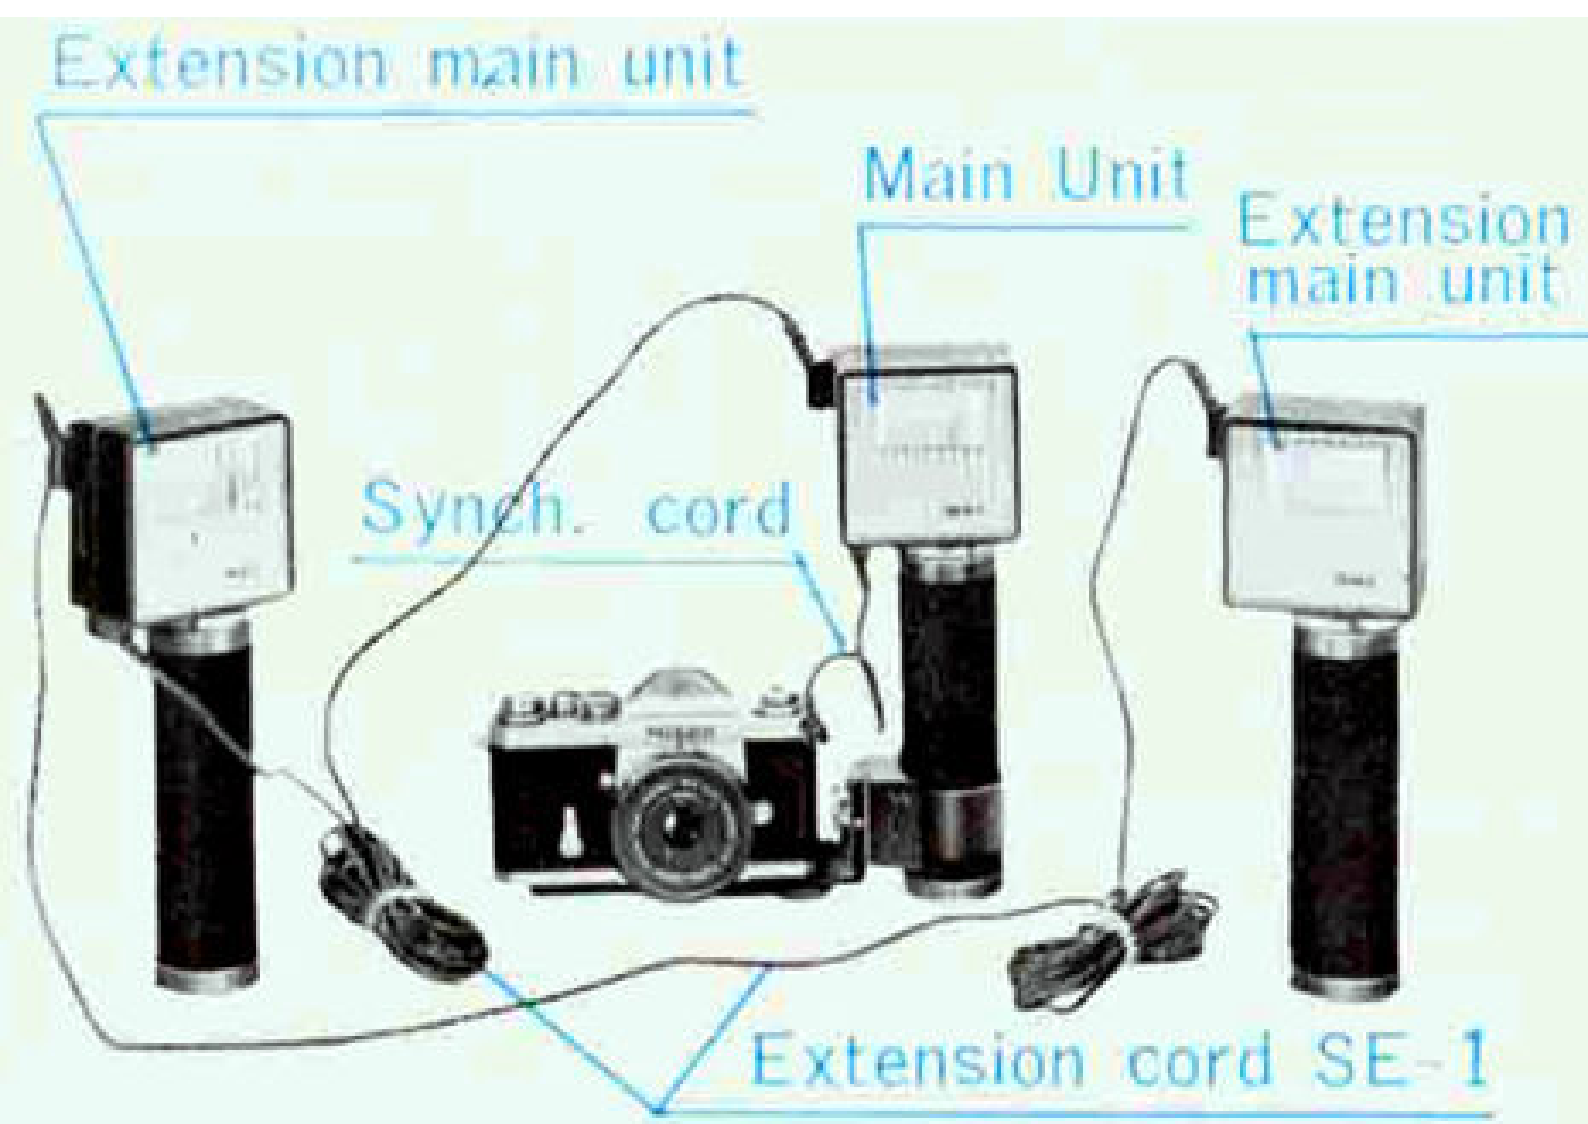

SR-2

Sync Socket

Attachment Ring


Power Cord




Ready Light



Exposure Calculation Chart for Ringlight Unit SA-2
(Subject distance 0.2 to 0.6m)

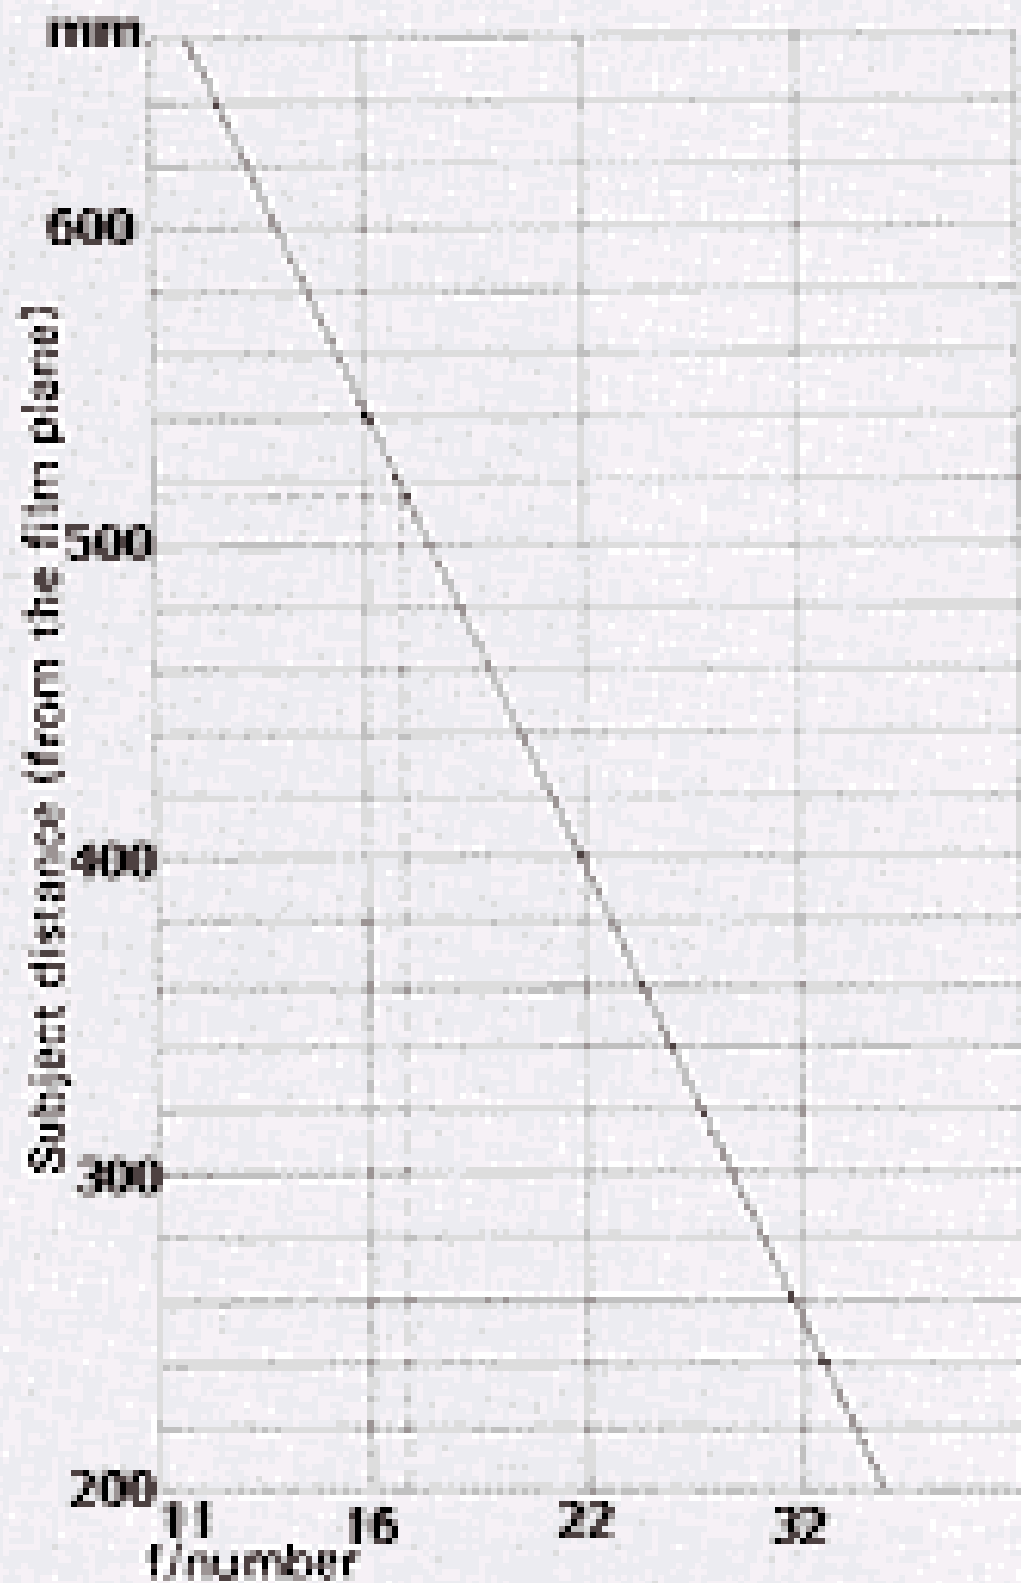

(ASA 100, Light output 1/4) or (ASA 25, Light output FULL)

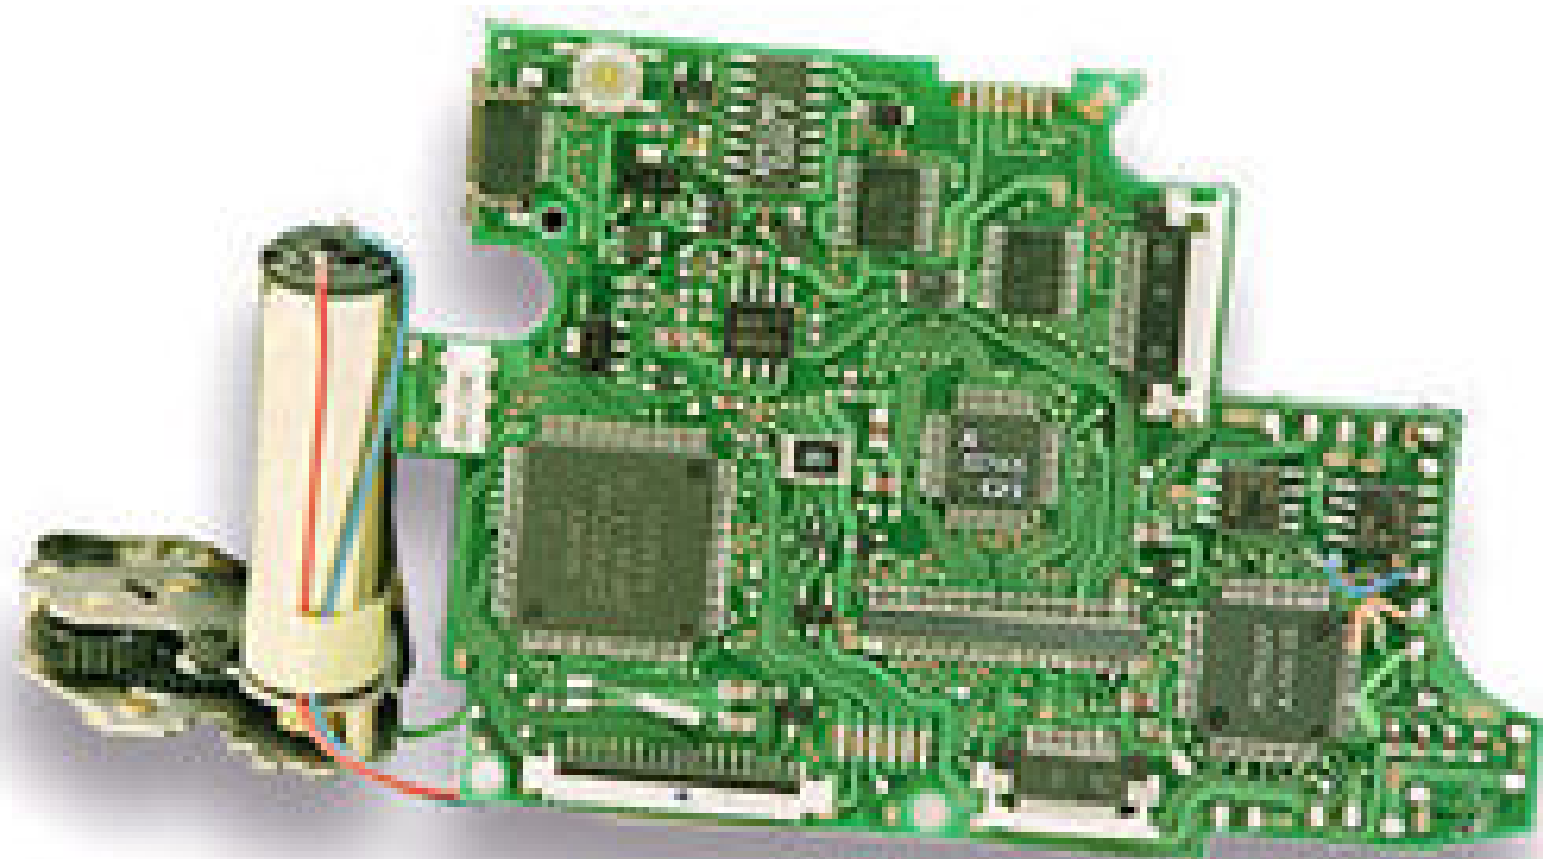

Nikon F3's

**Flexible
Printed
Circuits (FPC)**





