








5.9

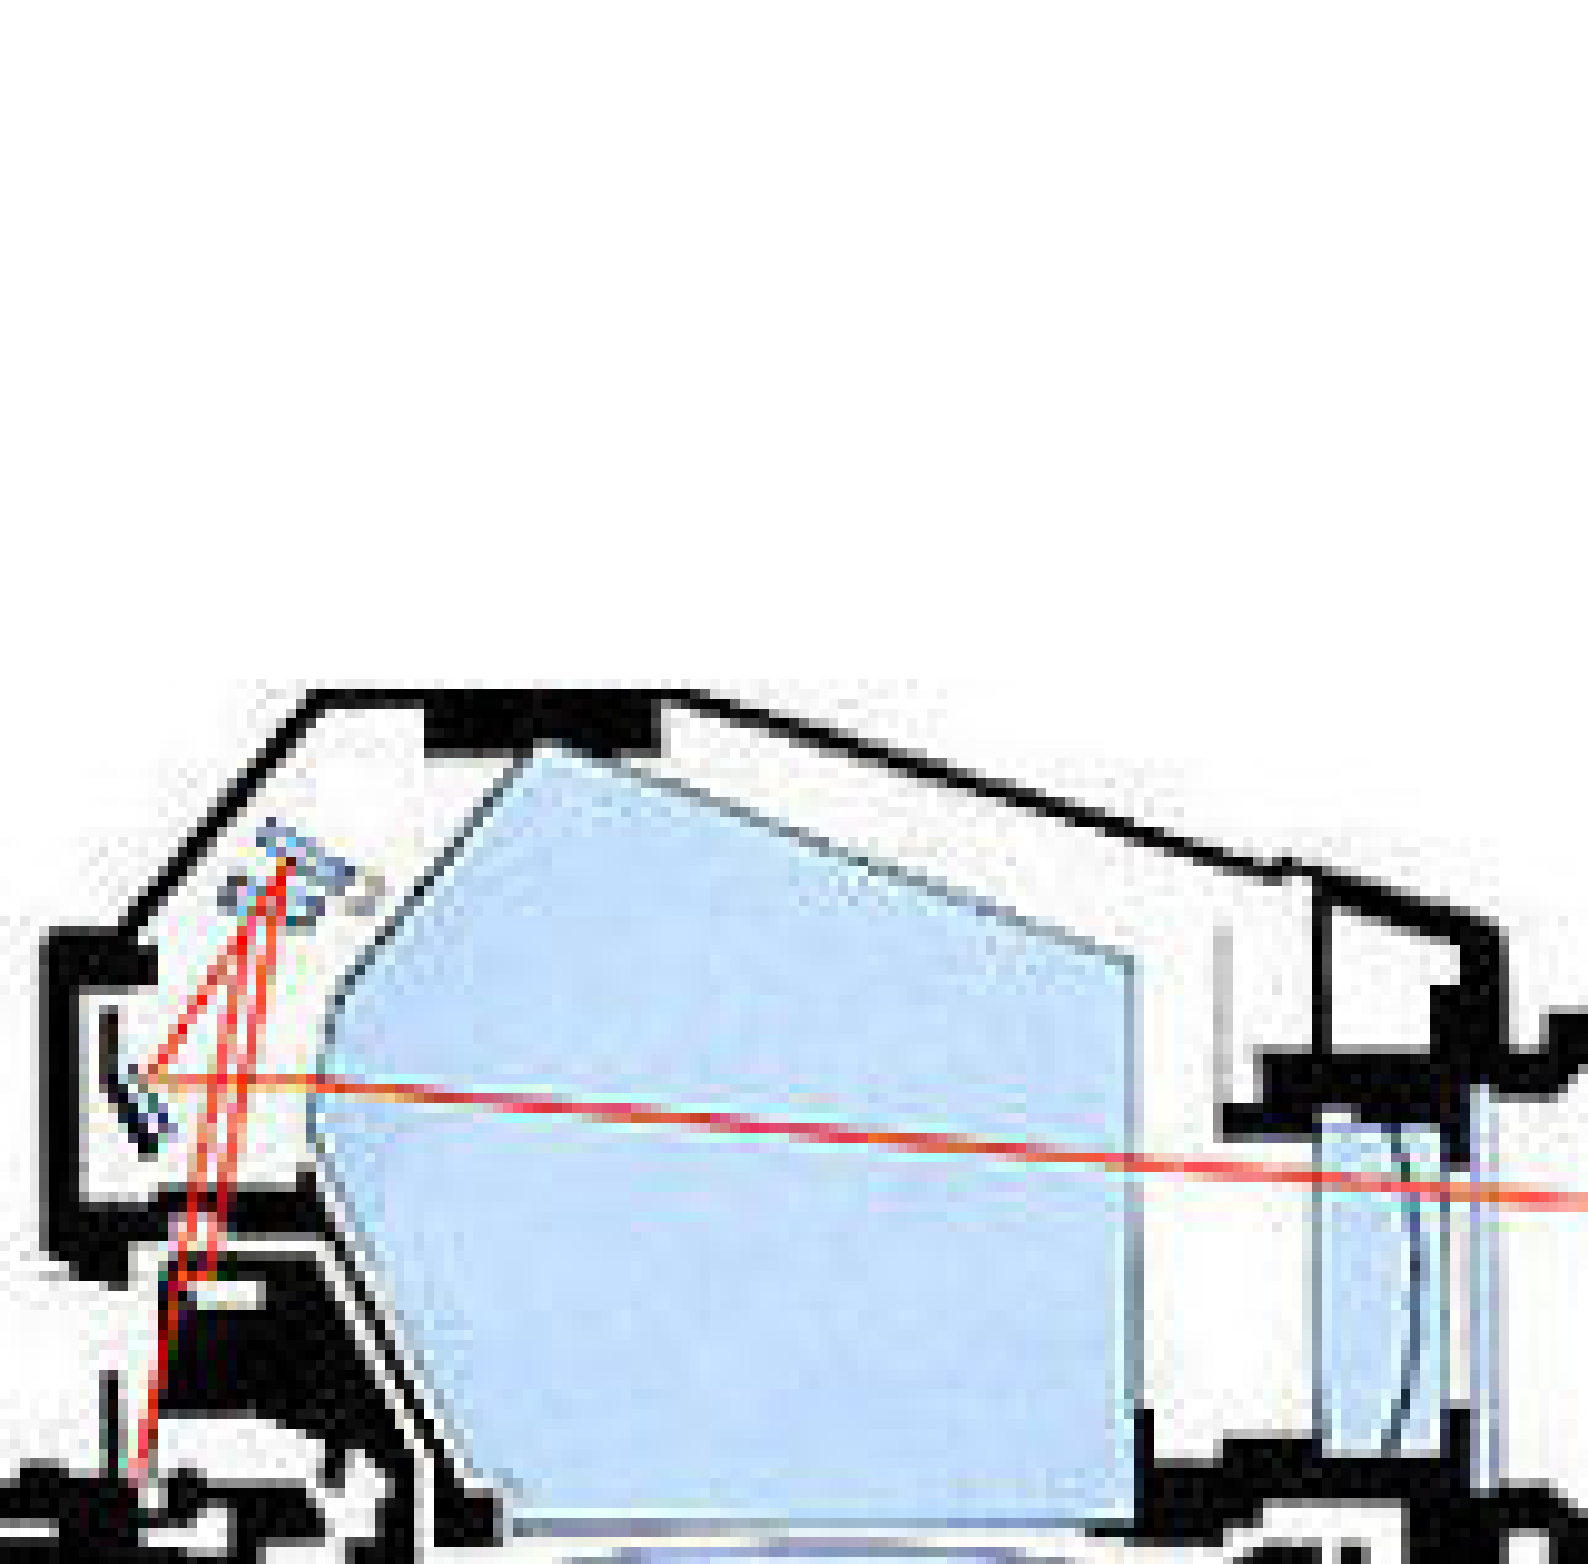

FA 1000 05-2-1-1-1

御注意！

このシャッター幕は非常に薄い特殊金属でできて
おりますのでおさえたり突いたりしないで下さい。
このカバーは撮影の際には取り外して下さい。

CAUTION !

Do not touch, press, pick or scratch the shutter
curtain as this may hamper its function.
Please remove the sheet before using the camera.







5.9

F

E

FM3a

A (Auto)

—

Shutter
Speed
Index

B (Bulb)





FE2

A (Auto)



Shutter
Speed
Index



M250


B (Bulb)

5.6



**Maximum
Sync Speed**

FM2n

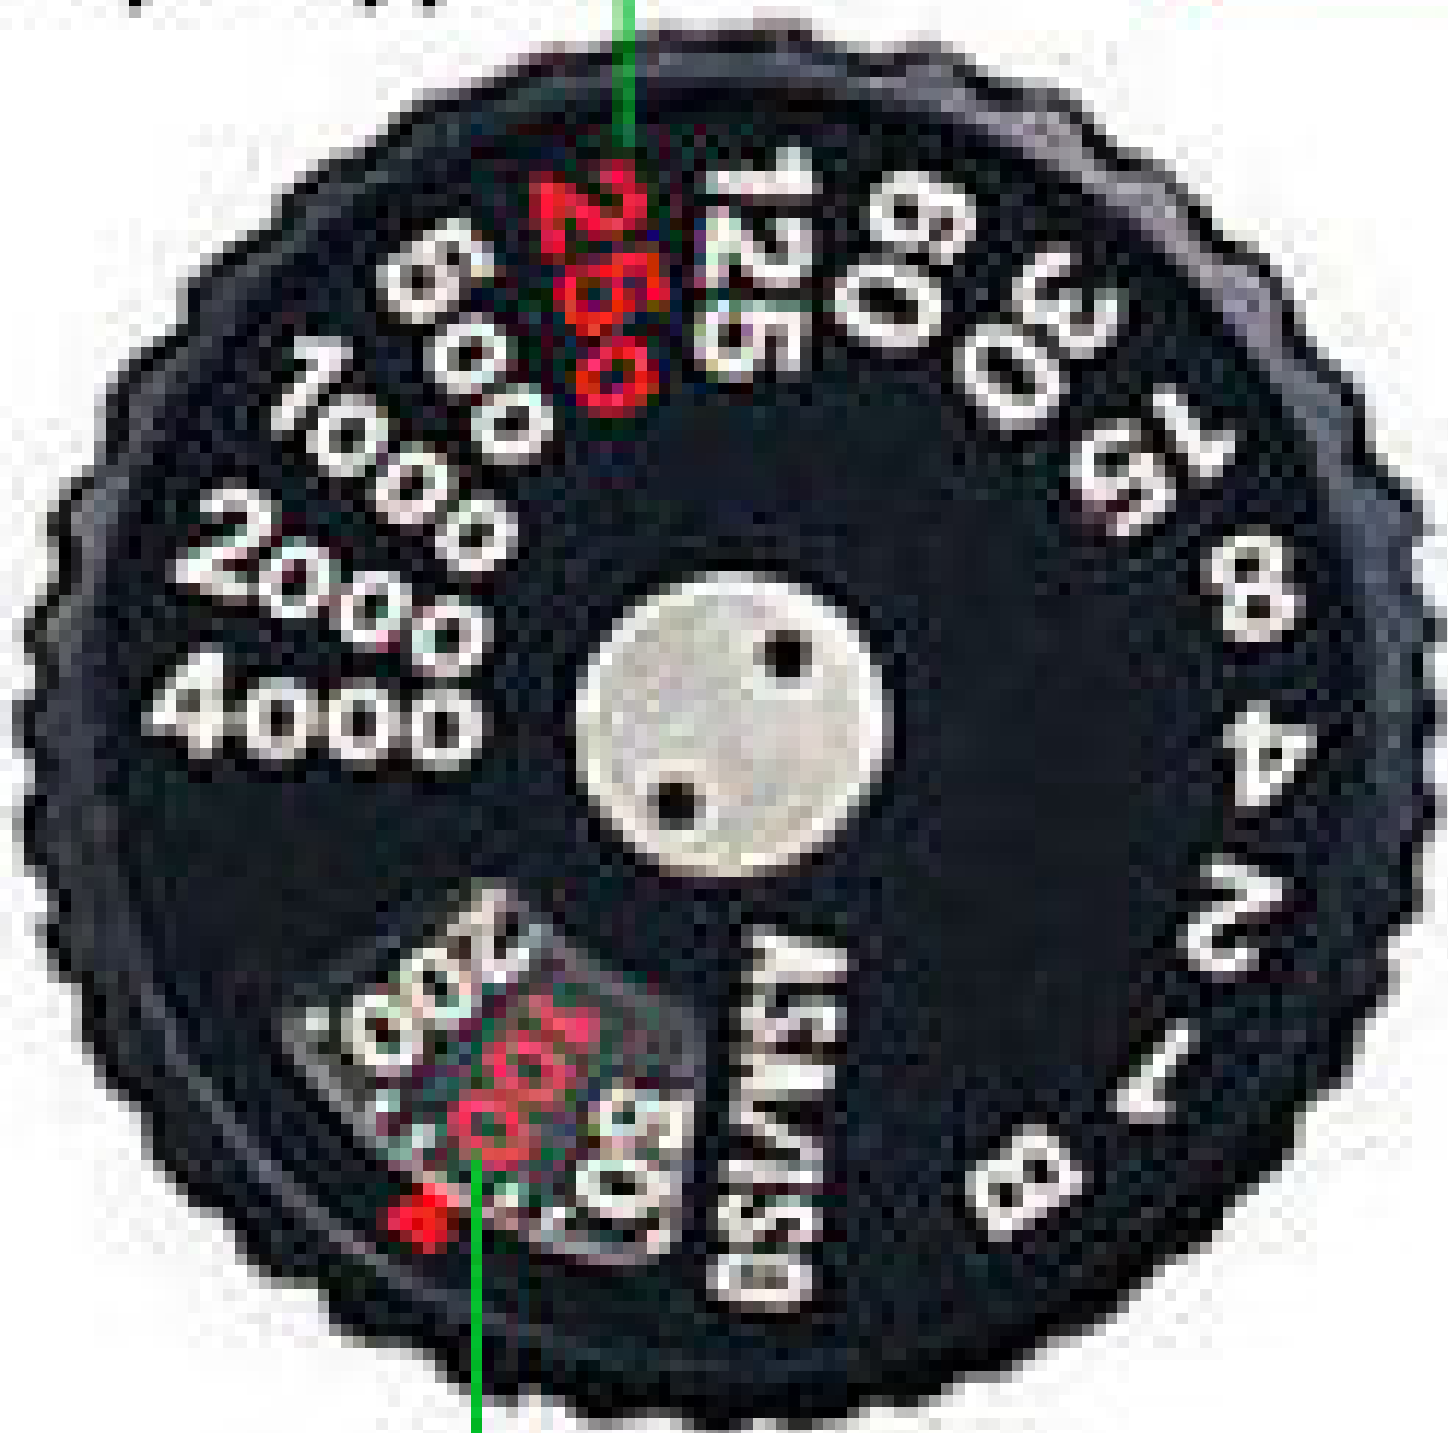

ASA/ISO Film Speed









5.0



















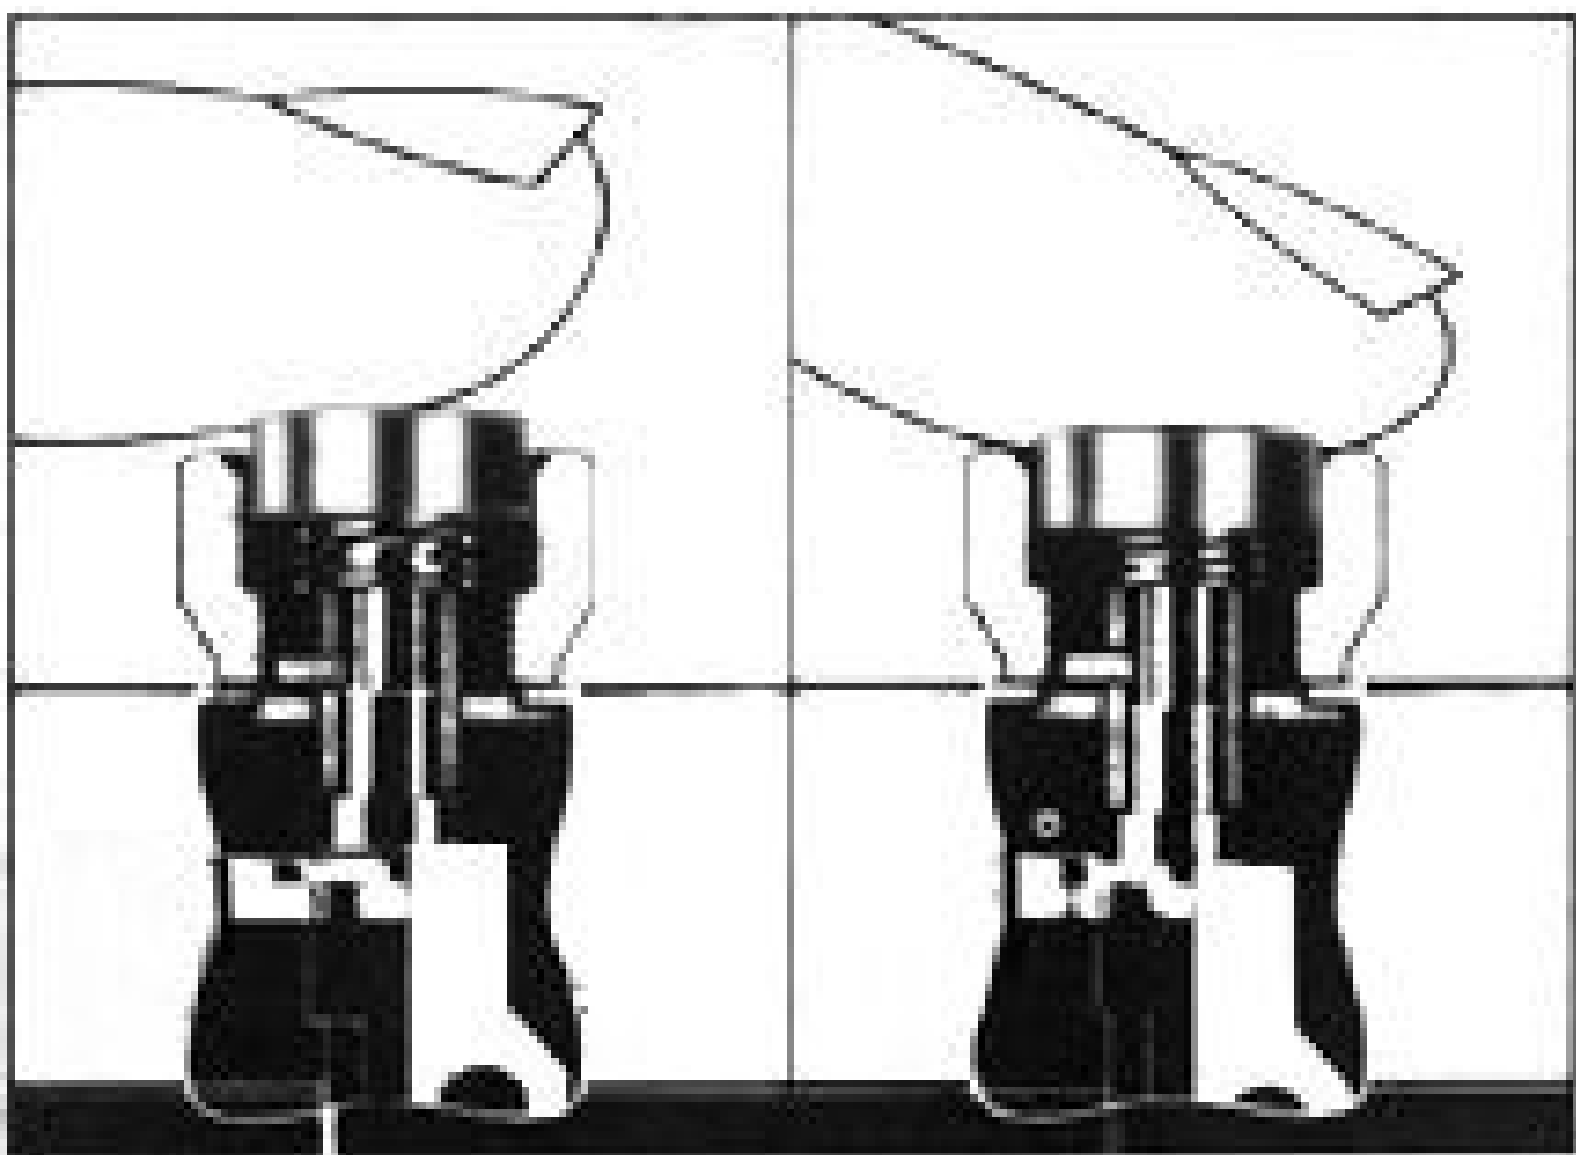







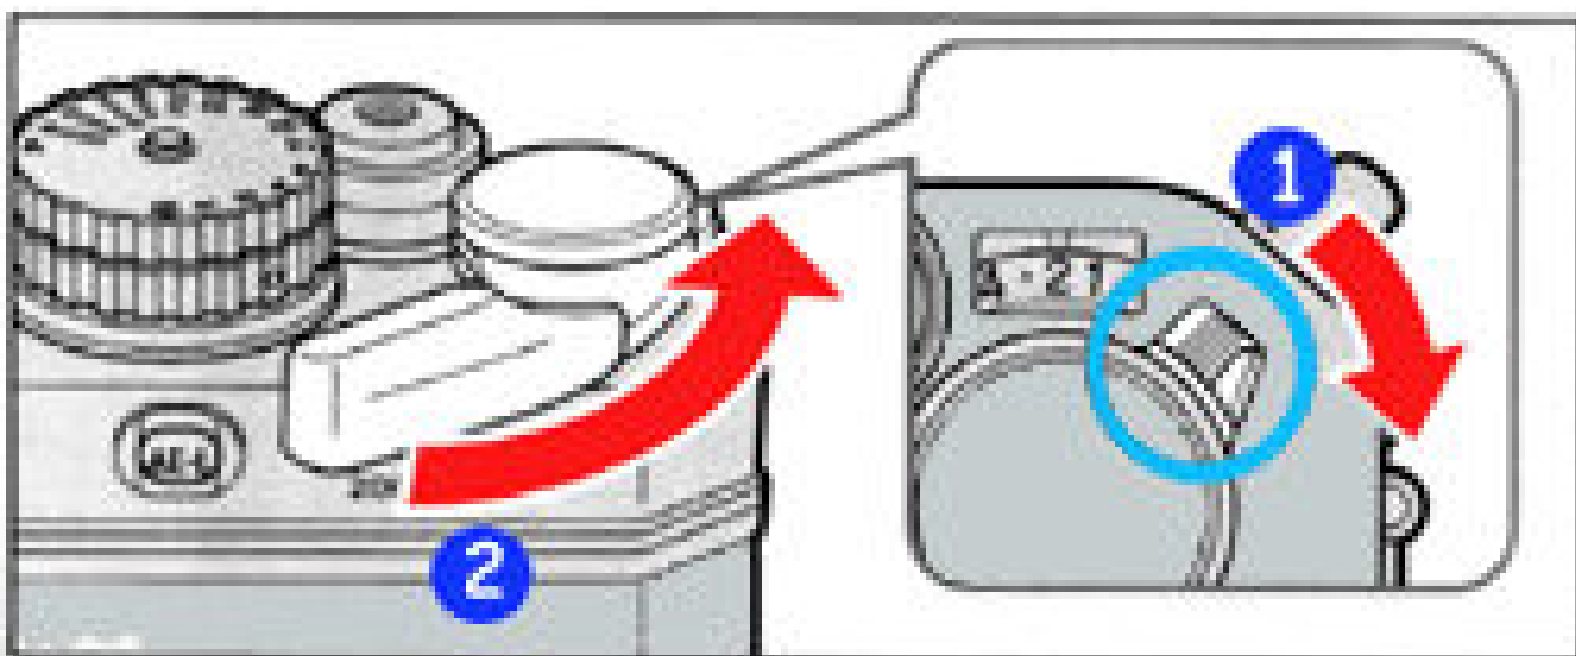




5.6

1000
900
800
700
600
500
400
300
200
100
0





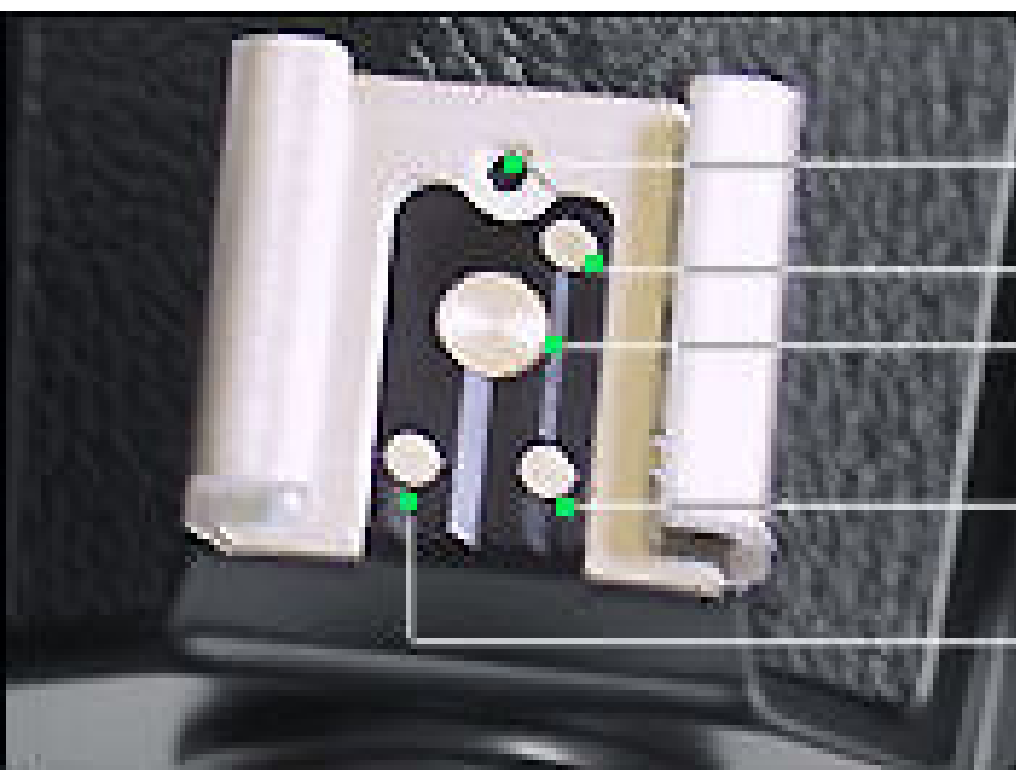

**Flash Positioning
Hole**

Monitor Contact

Hot Shoe Contact

**TTL Auto Flash
Output Control**

**Flash Readylight
Contact**





**AUTO Flash
Sensor**

**TTL Flash
Contacts
(Multiple x3/4)**



Speedlight Model(s)	Valid shooting modes			Connection Method
	TTL Flash	Non-TTL (exter- nal) auto flash	Manual Flash	
SB-28/28DX SB-27 SB-26 SB-25 SB-24	Yes	Yes	Yes	Cordless
SB-29 SB-23 SB-21B	Yes	No	Yes	Cordless
SB-22/22S SB-20 SB-16B SB-15	Yes	Yes	Yes	Cordless
SB-11 SB-14 SB-140	Yes	Yes	Yes	* 1 * 2






5.4









Bus

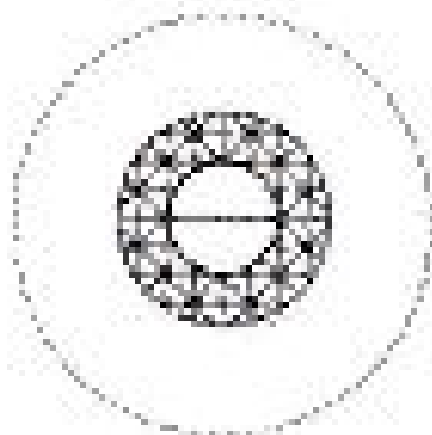

56

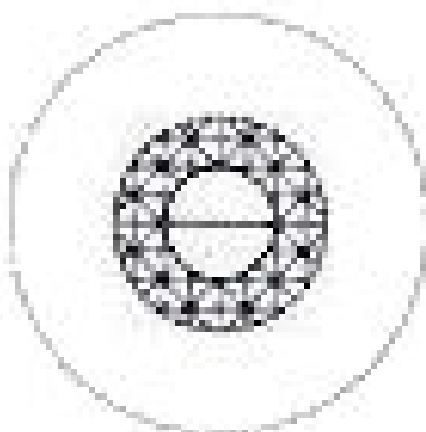


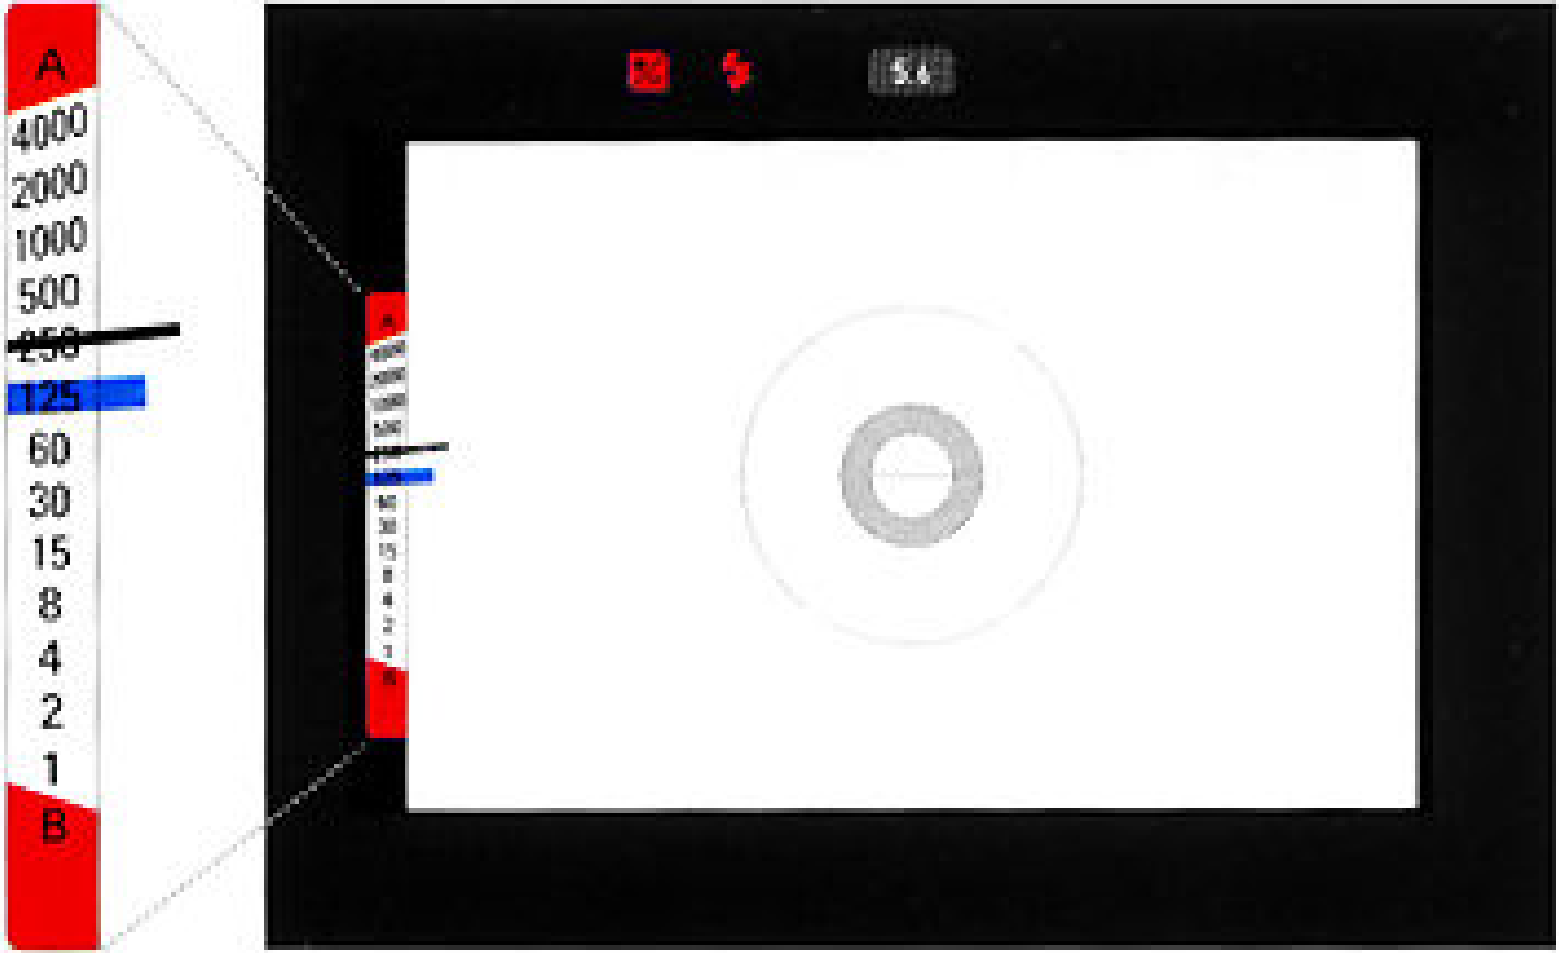







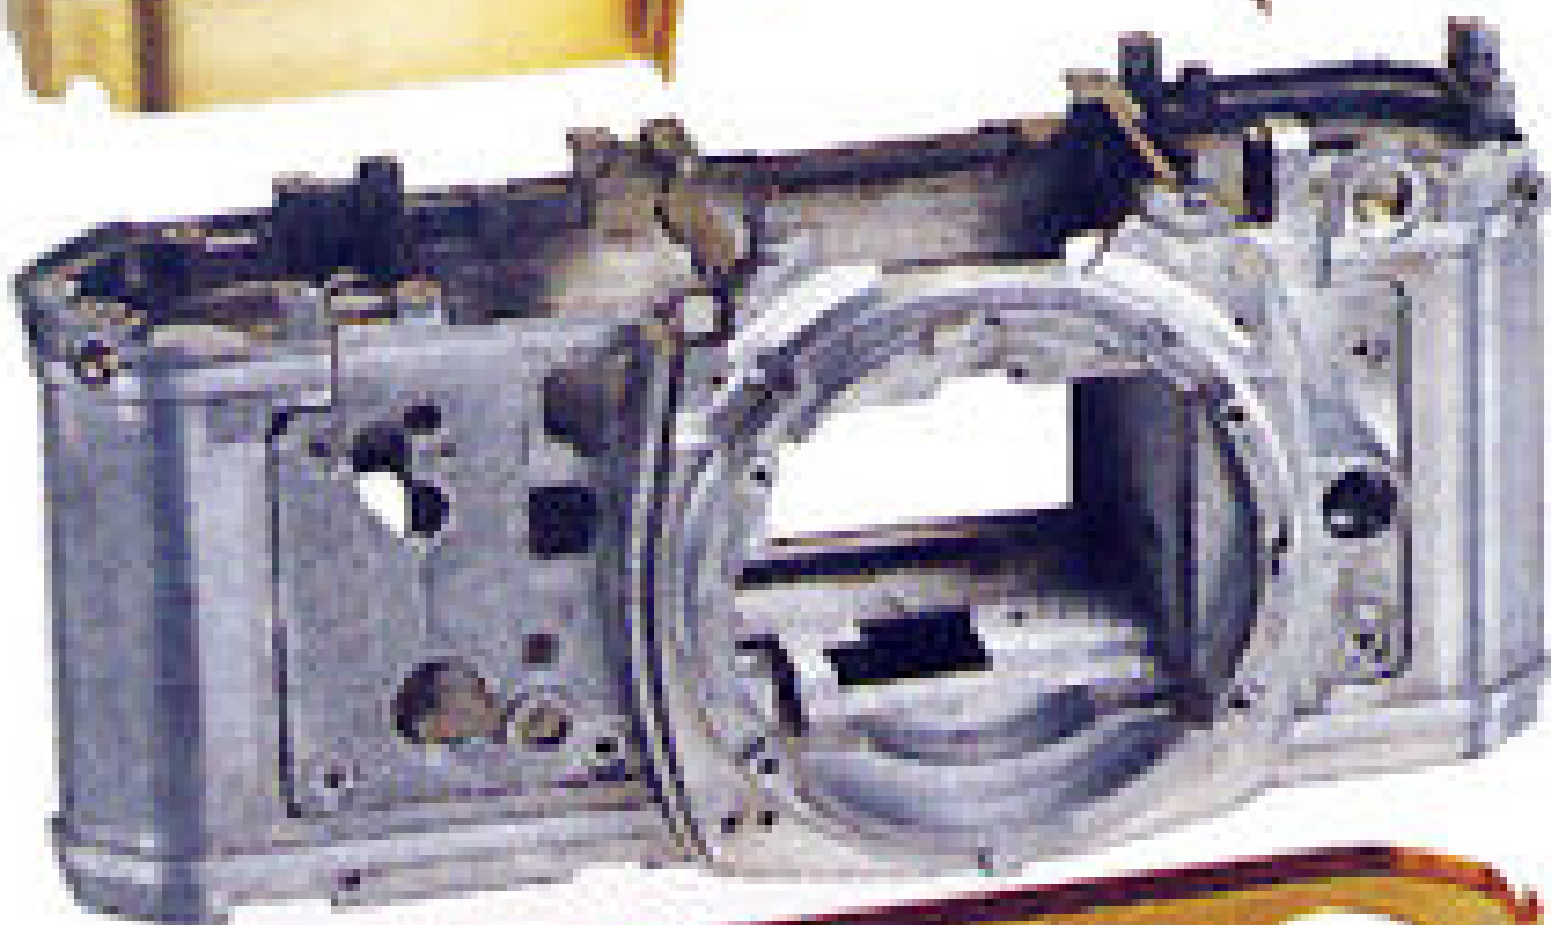













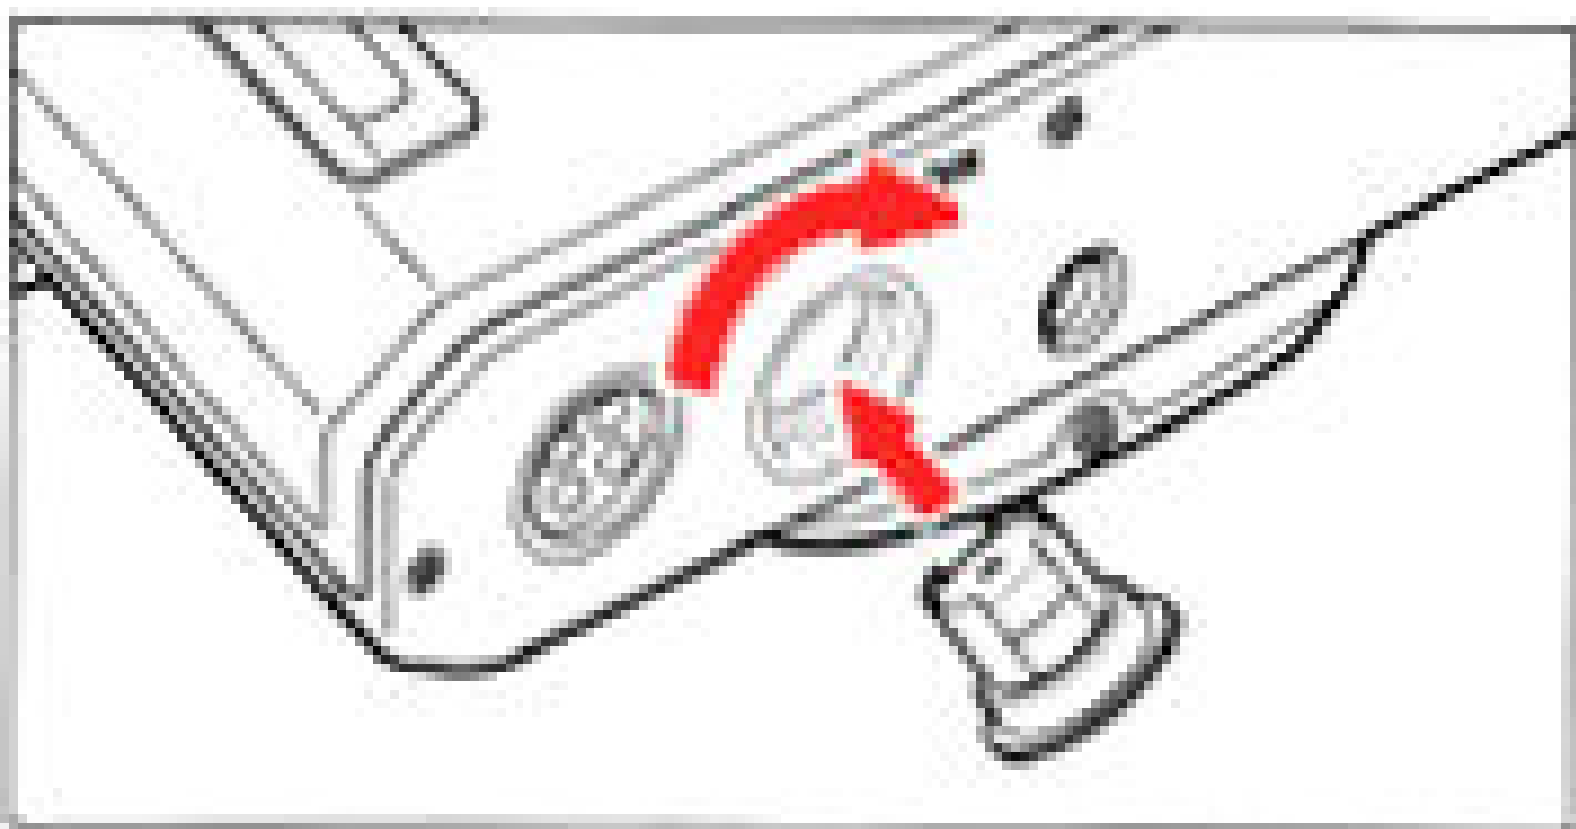

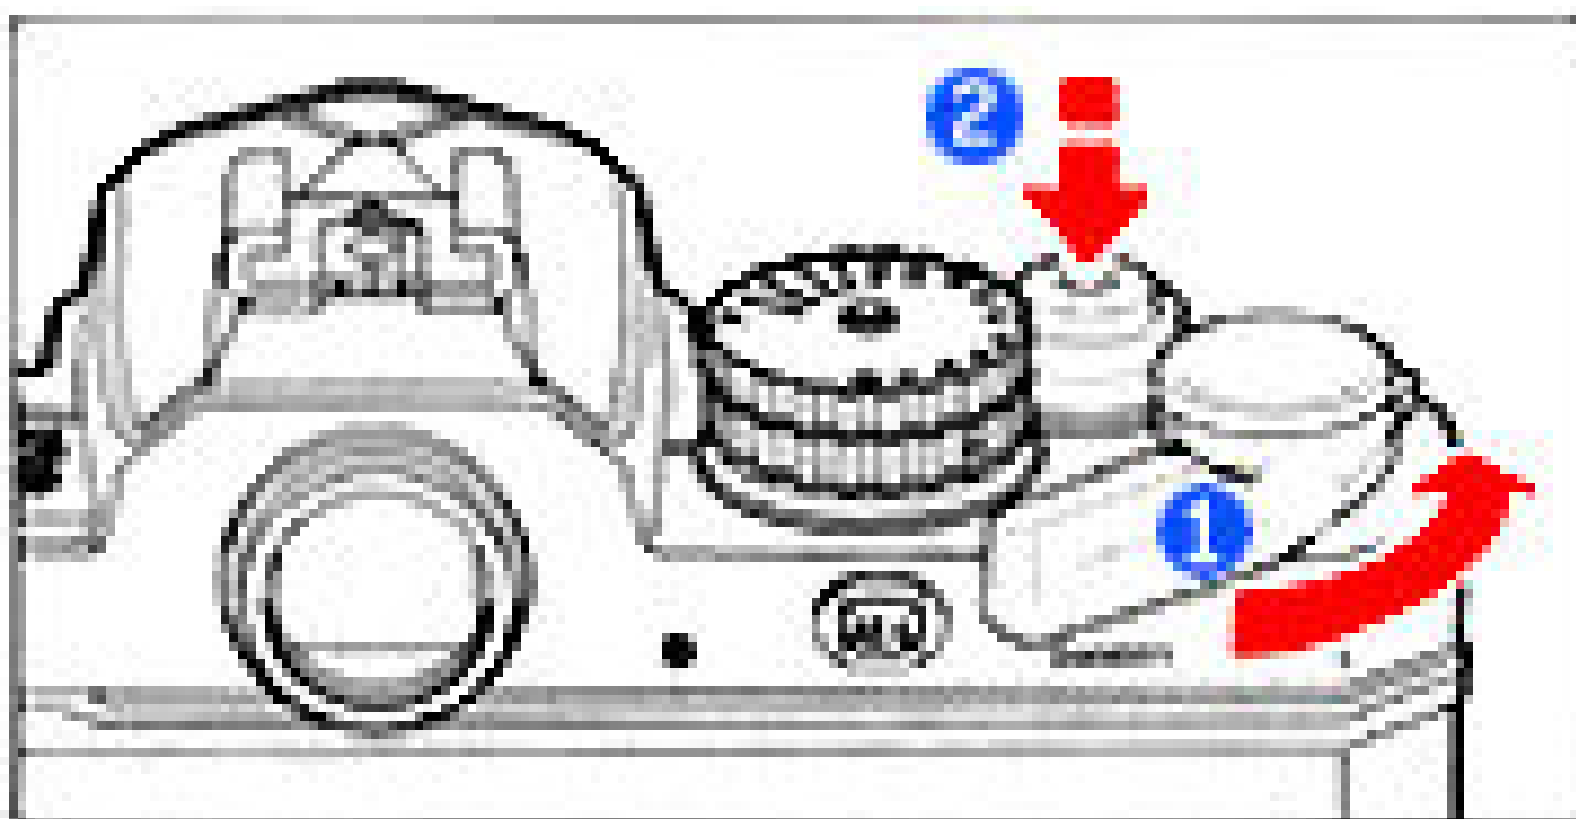




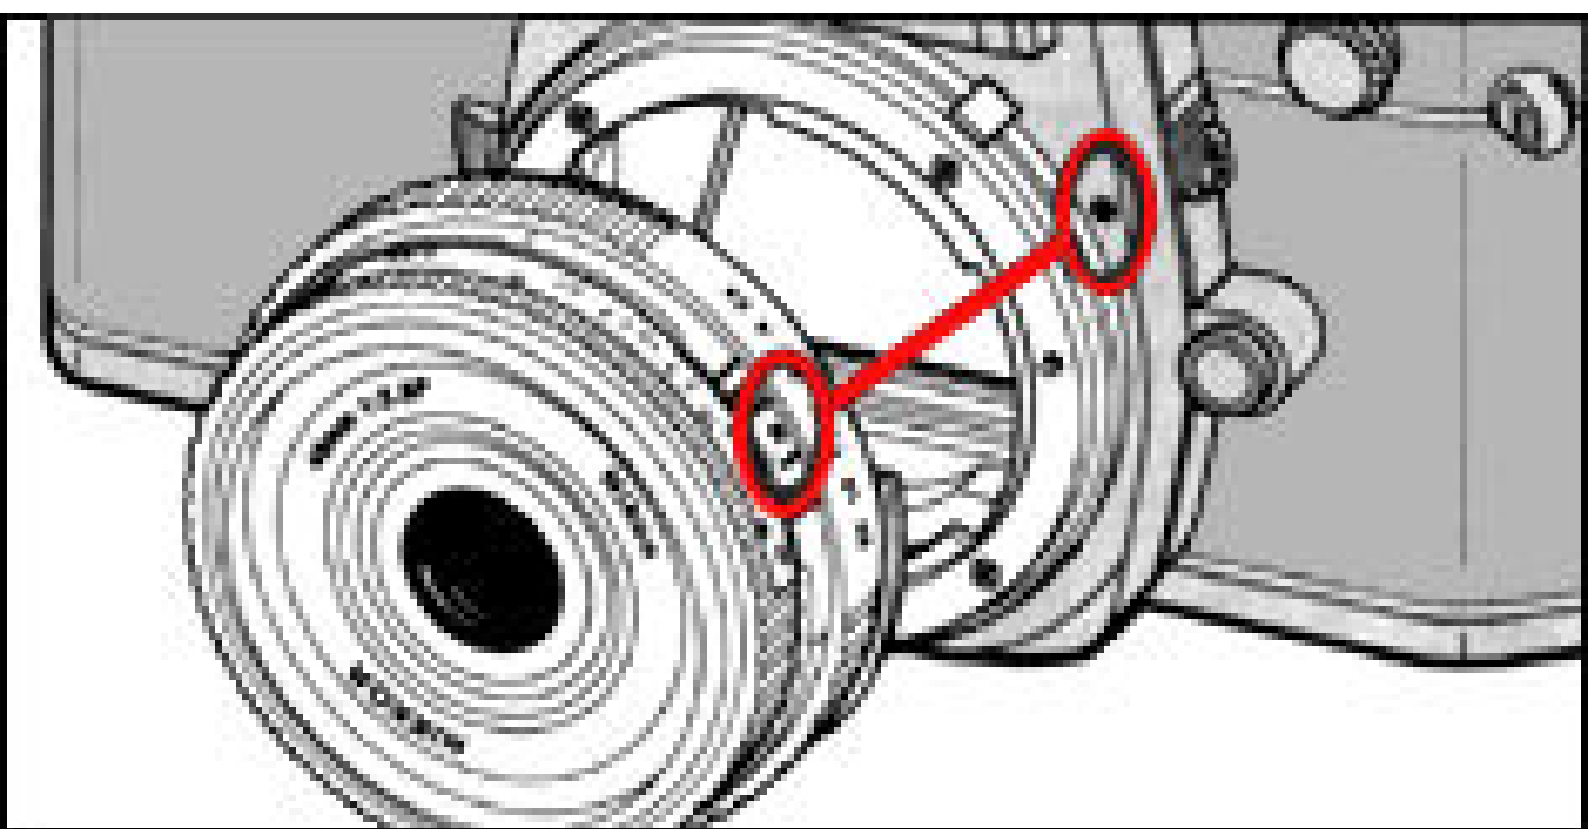

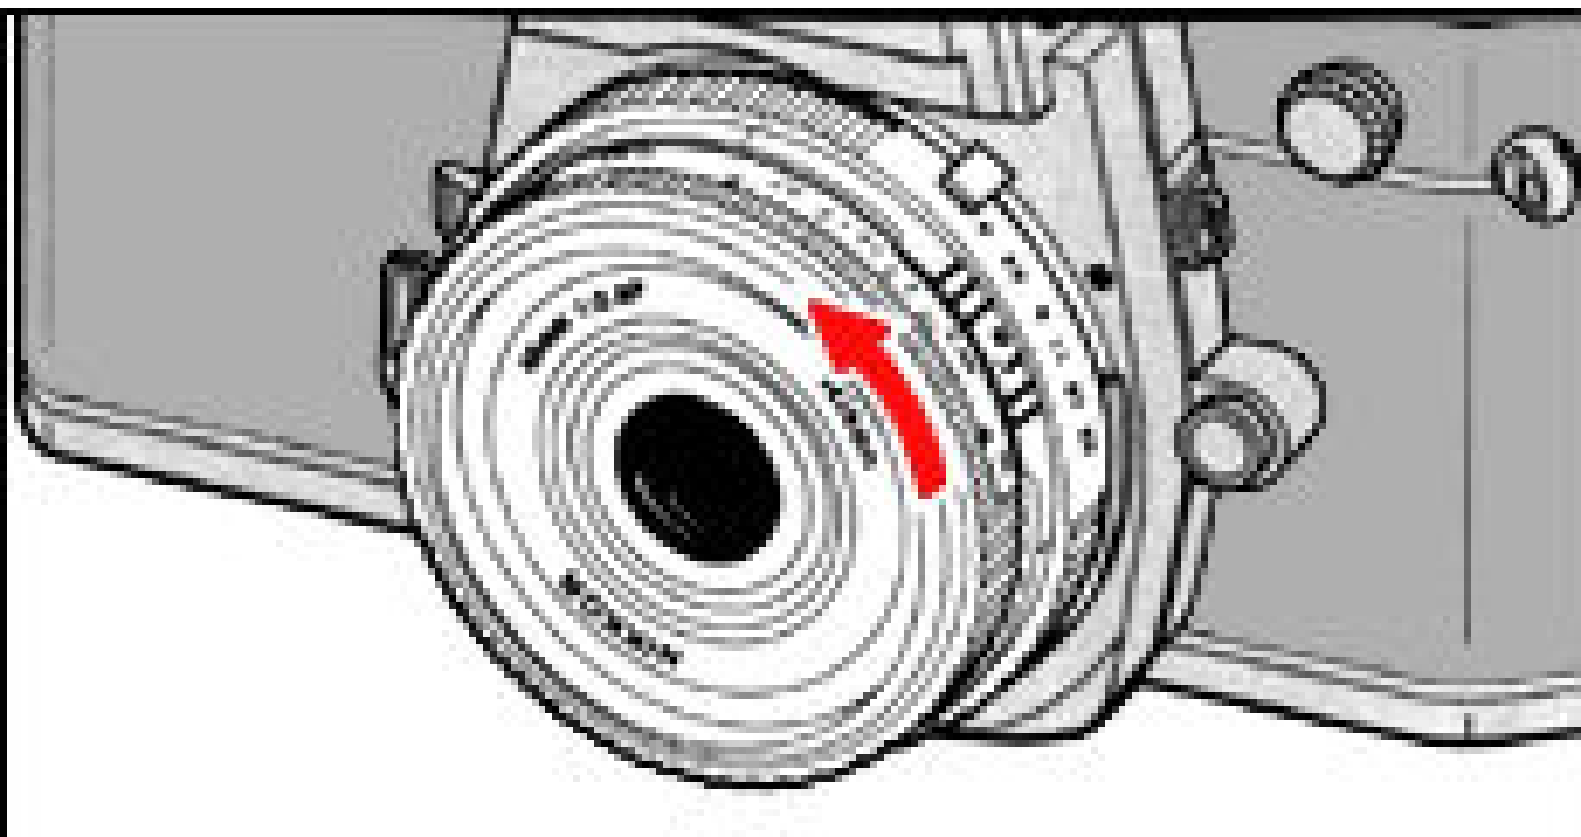





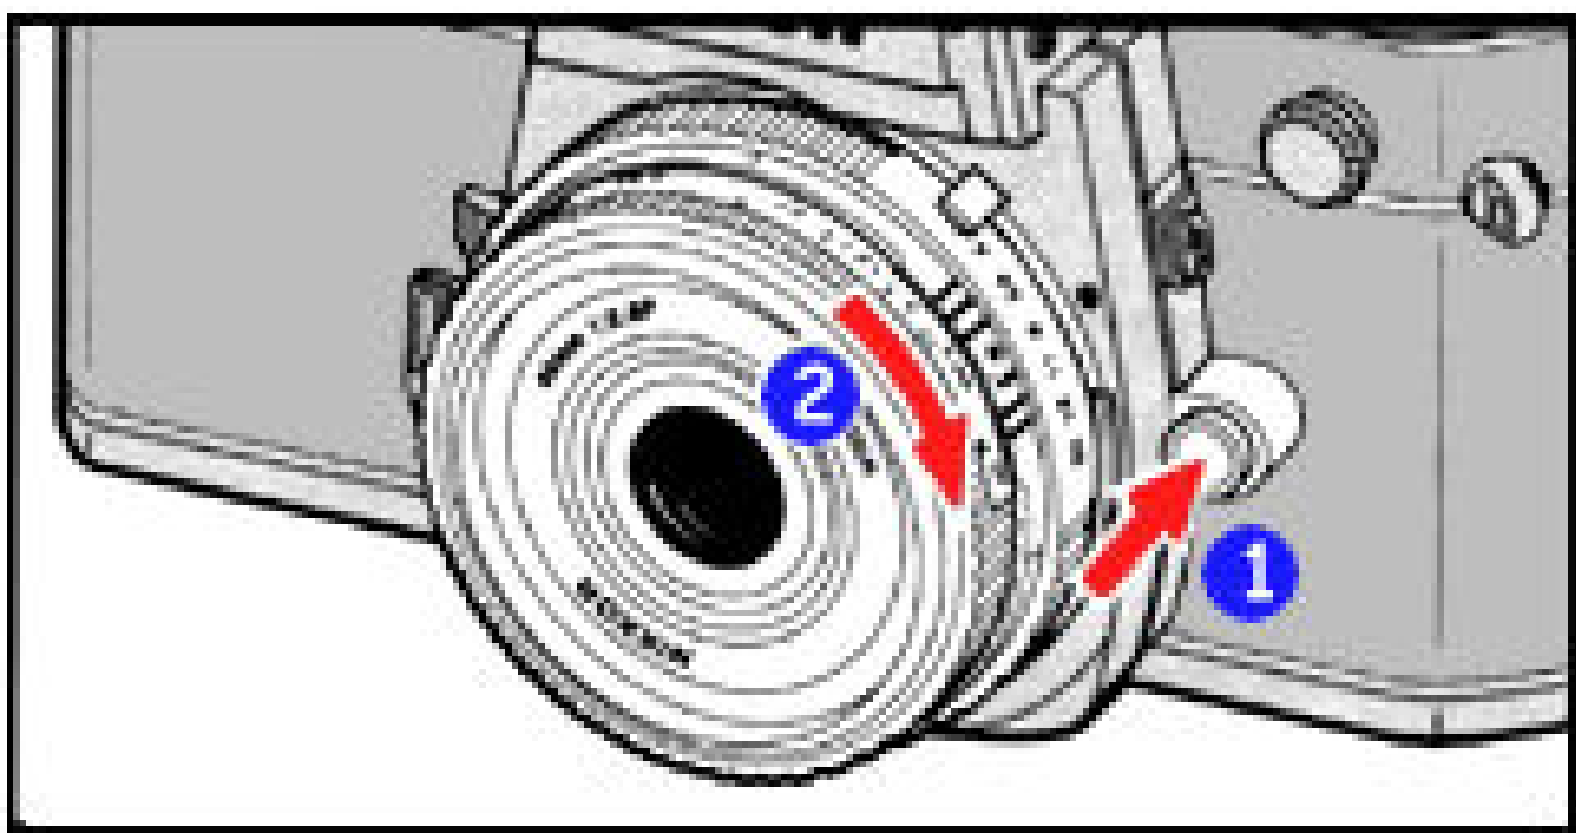


**Press
Lightly
to Activate
Meter**




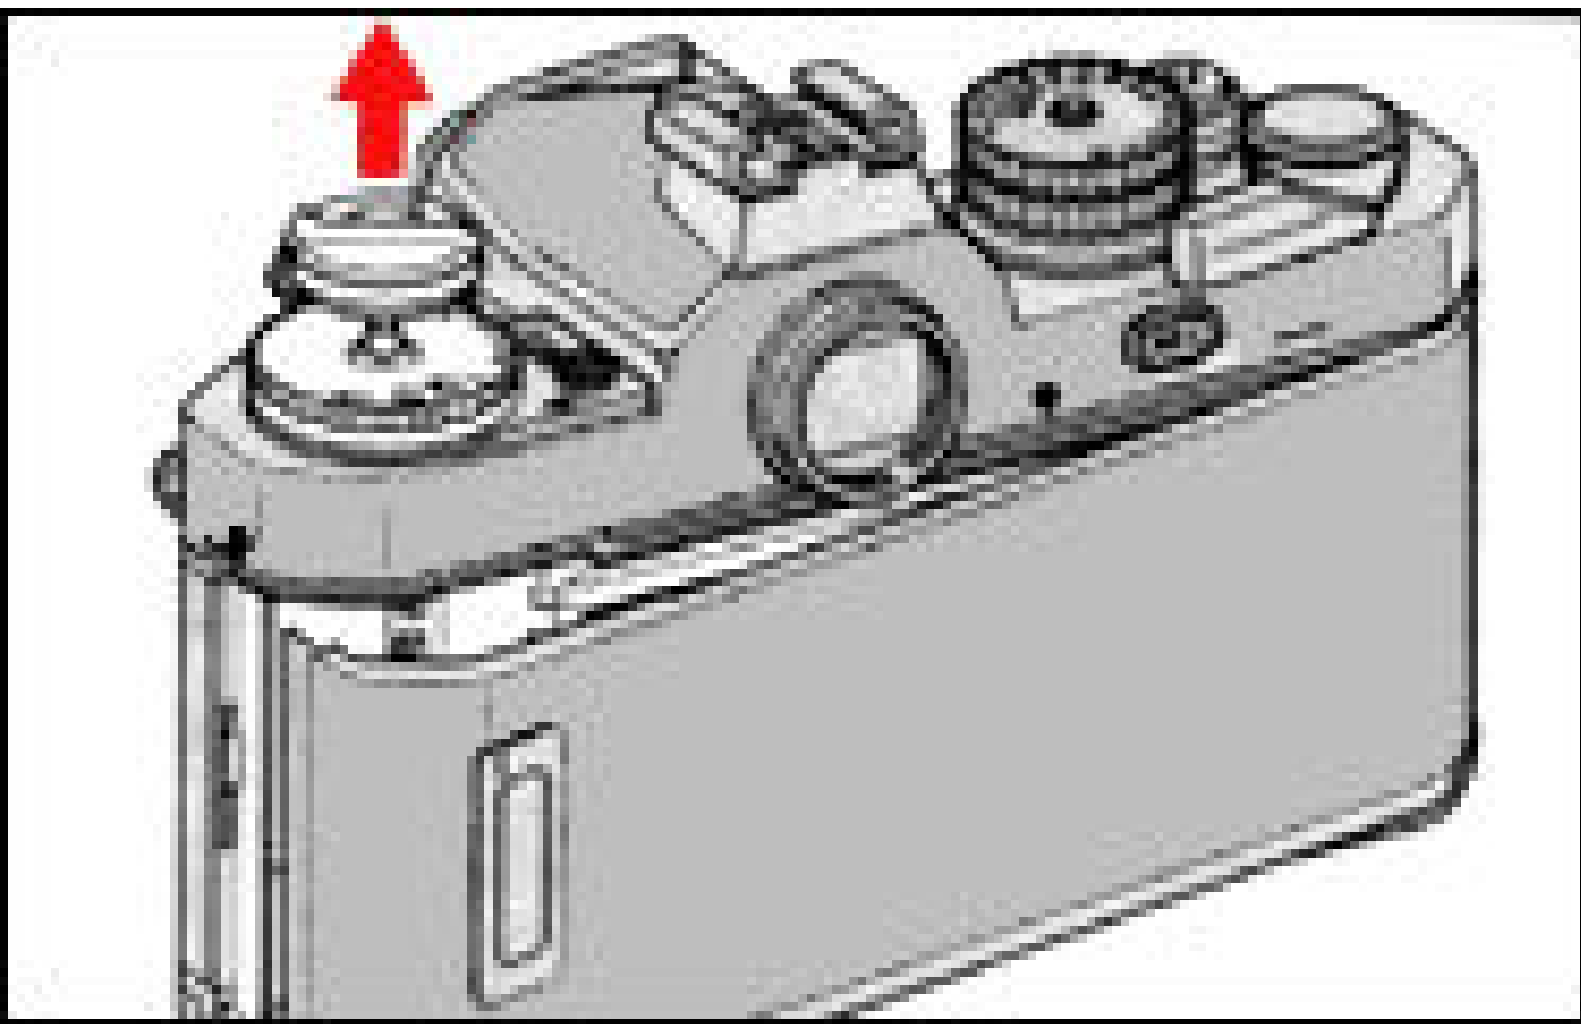


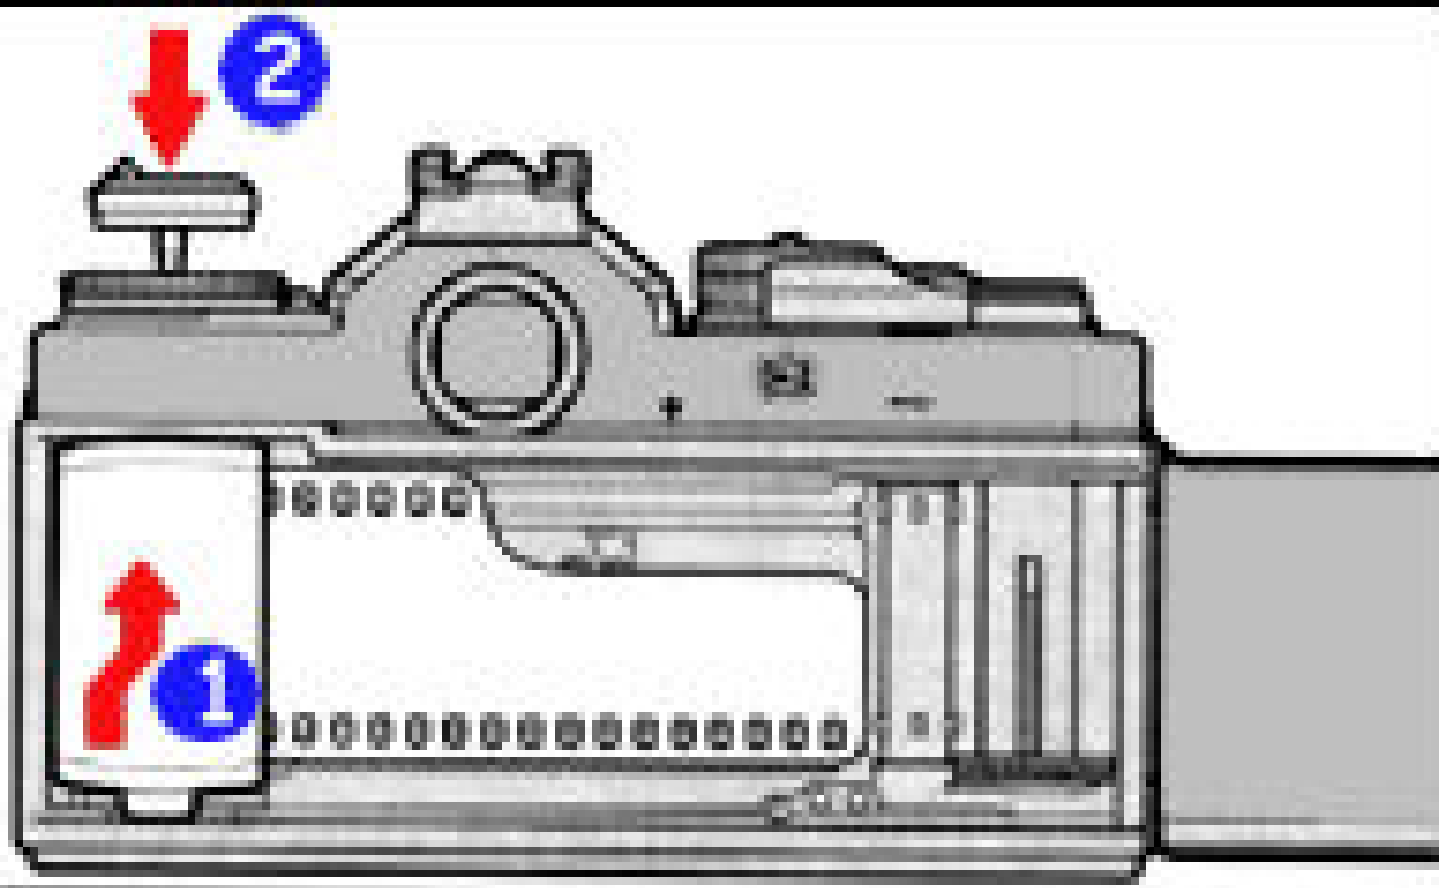




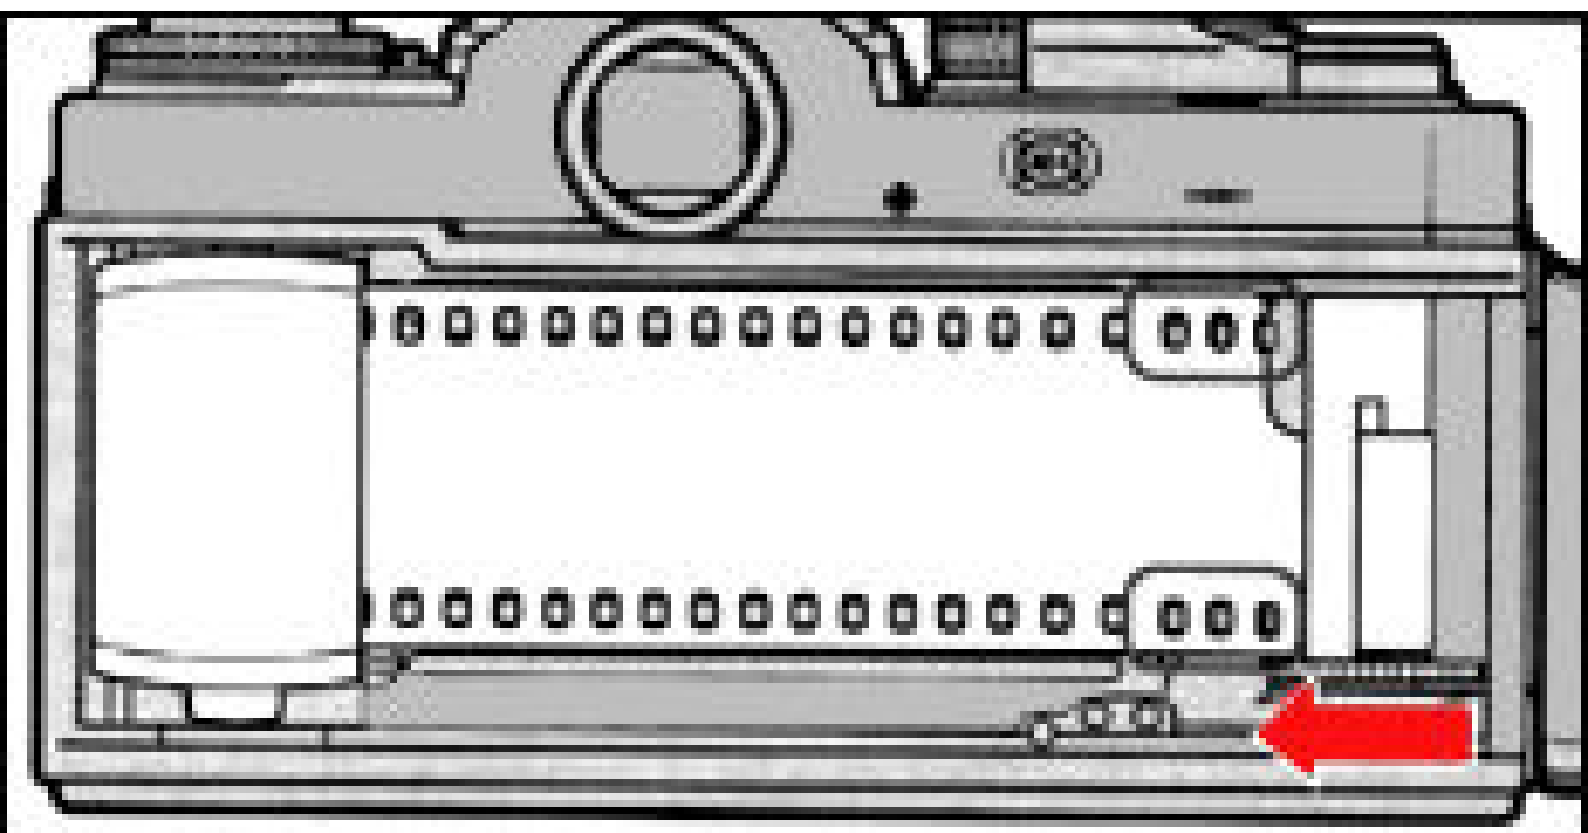


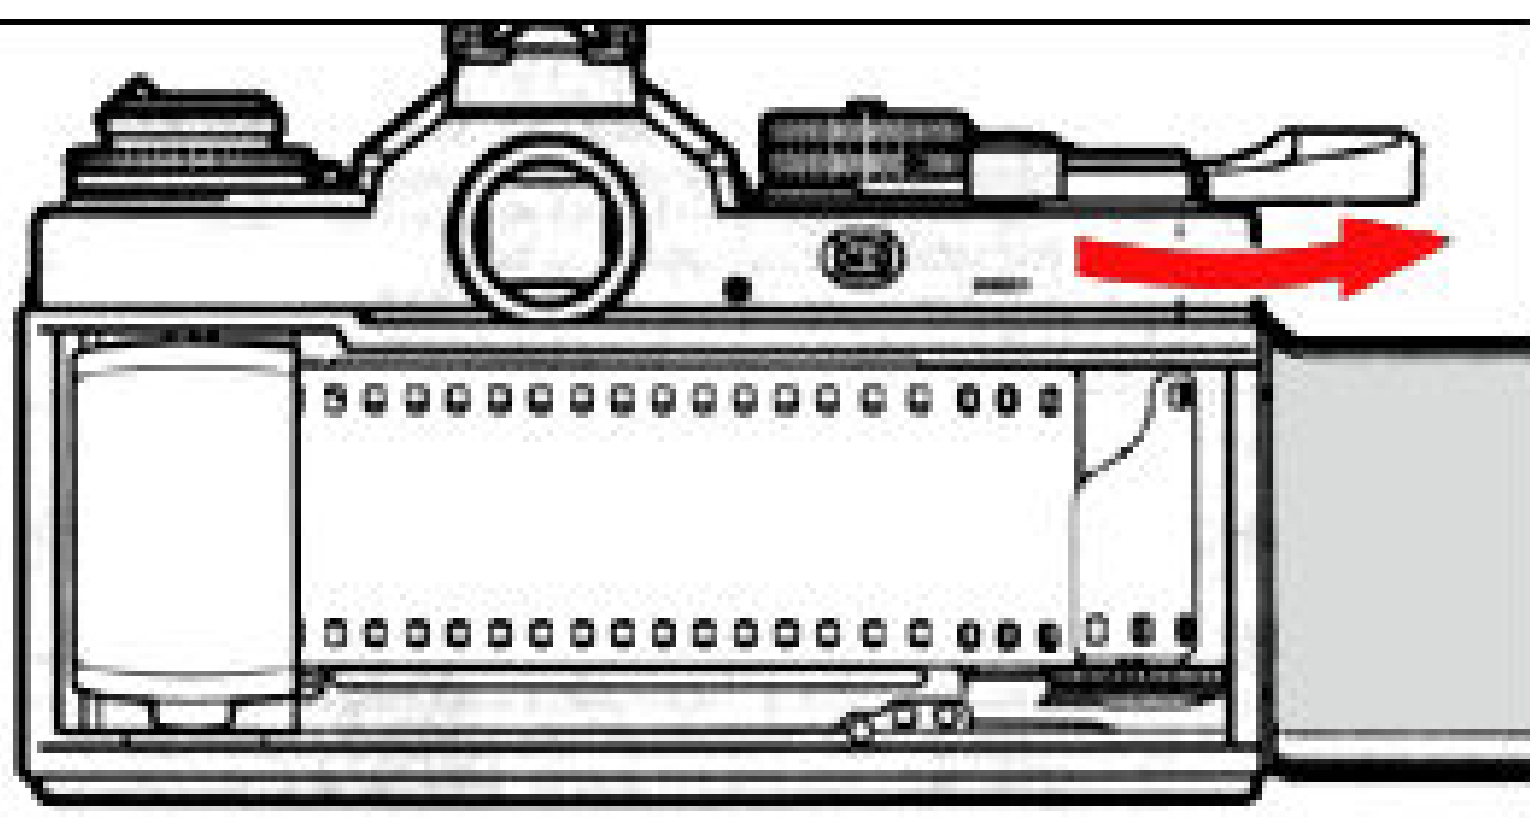

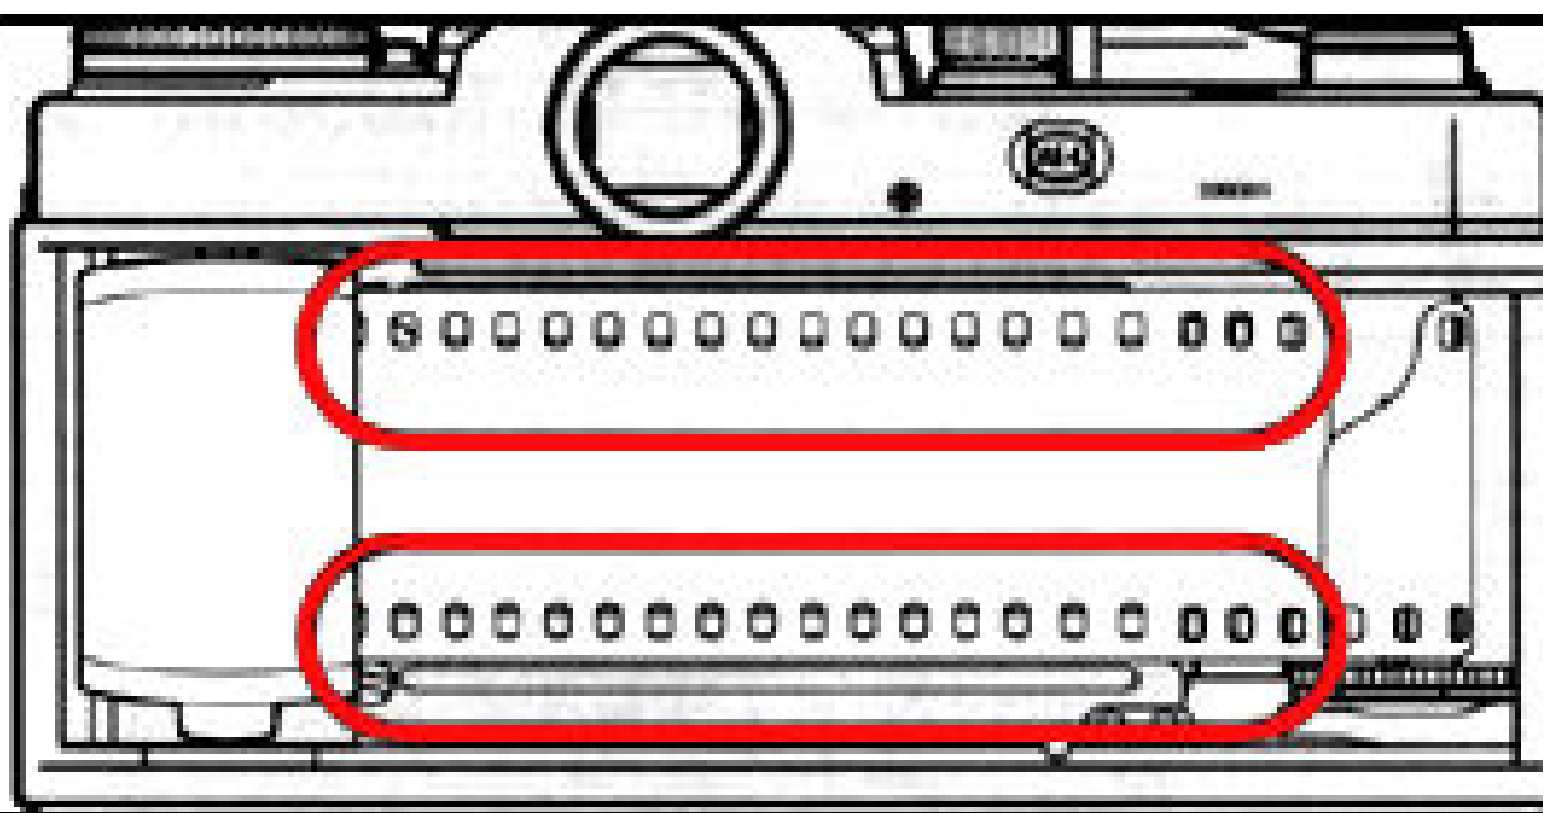

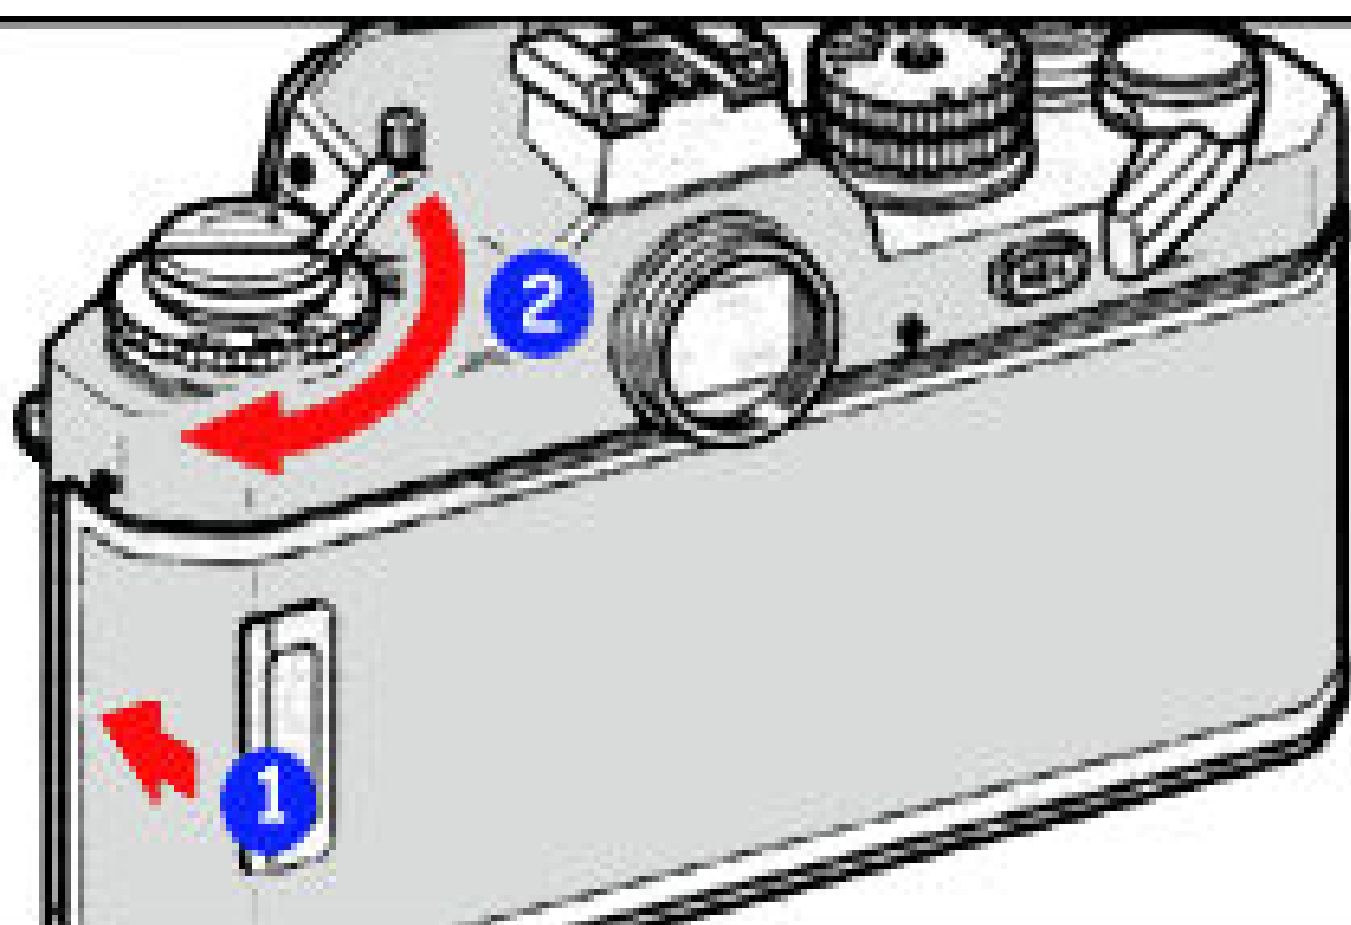



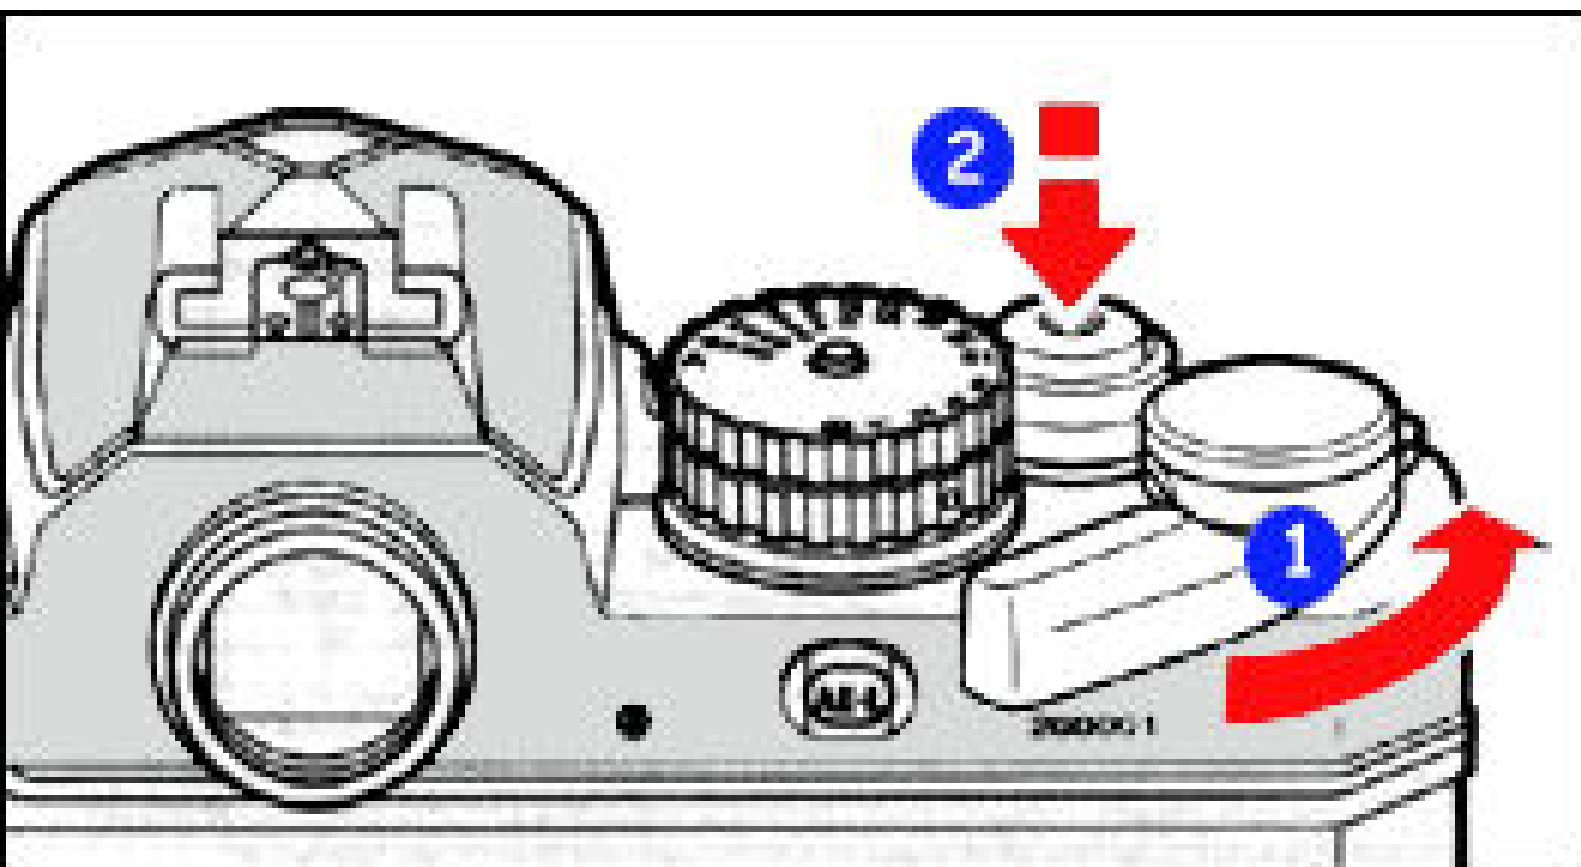






Gently
Press Down
to take the
shot





5.4

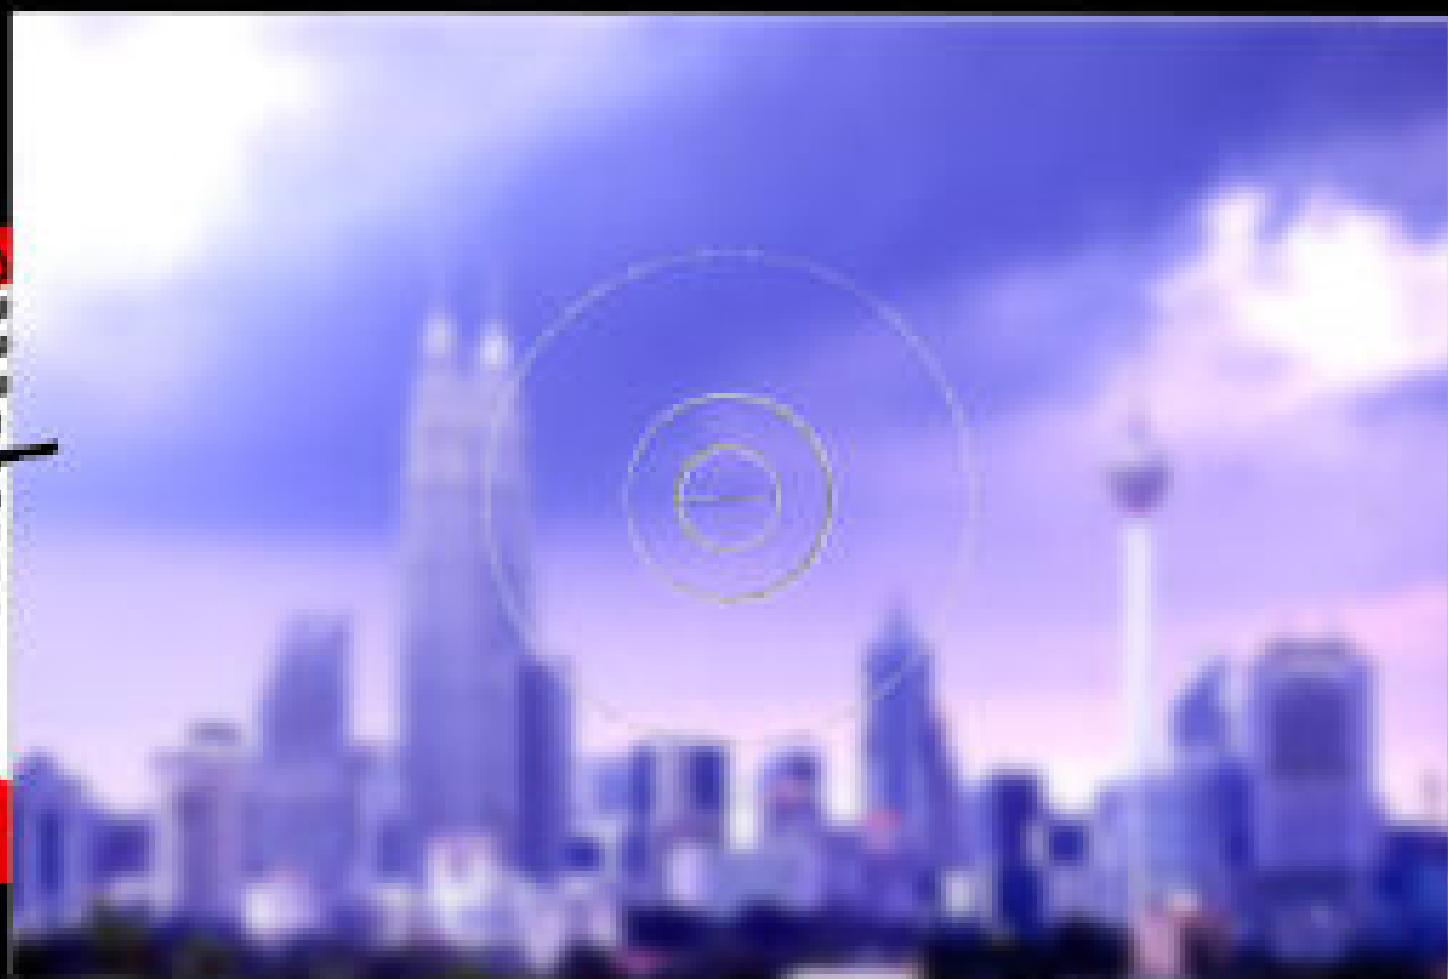




5.4





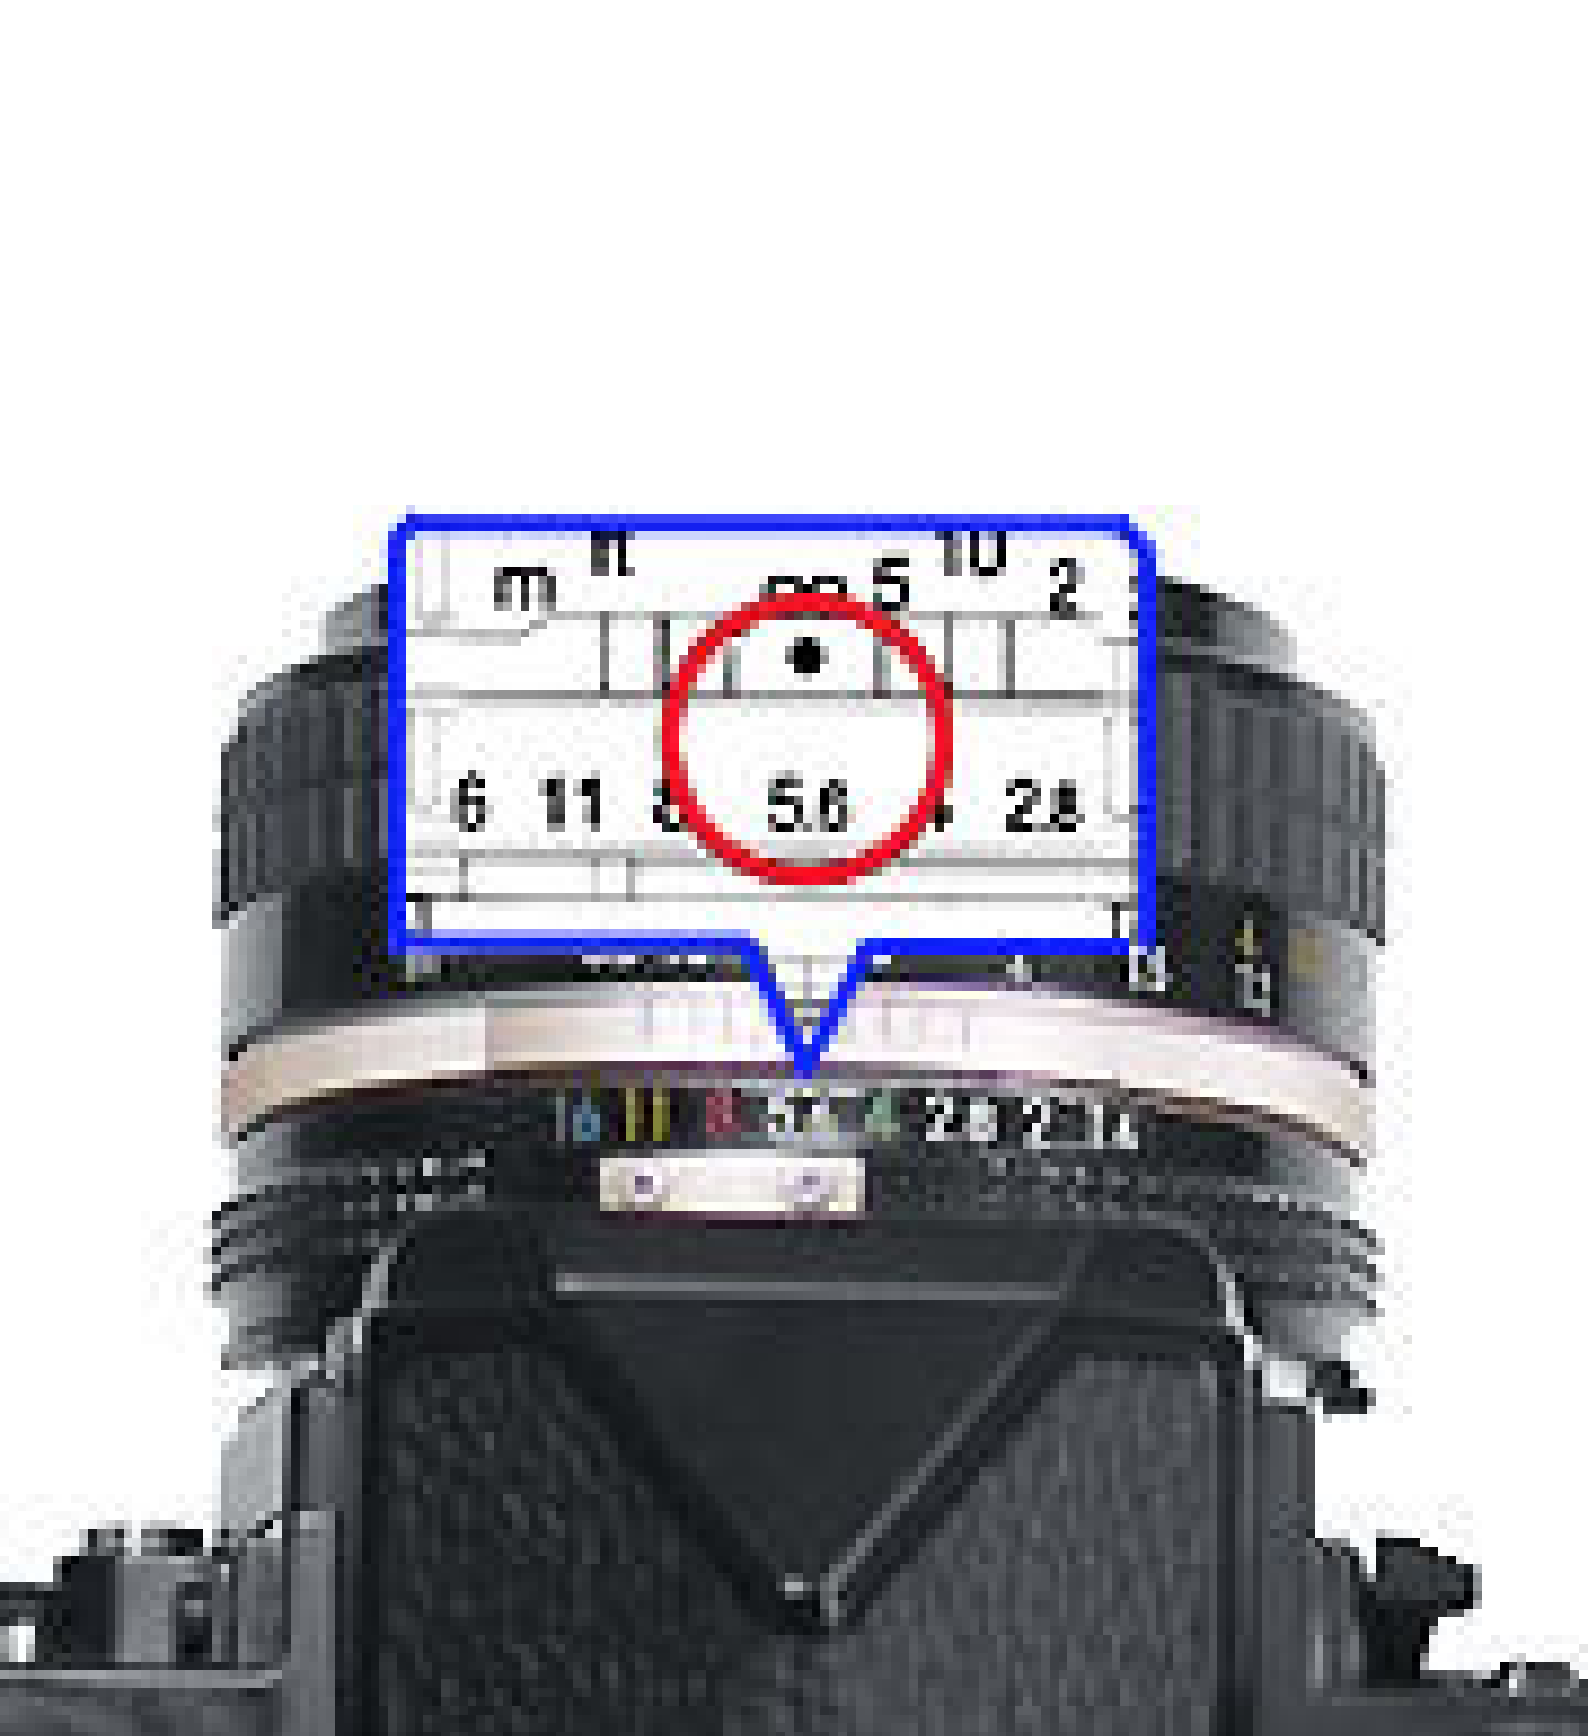


5.4





2.6

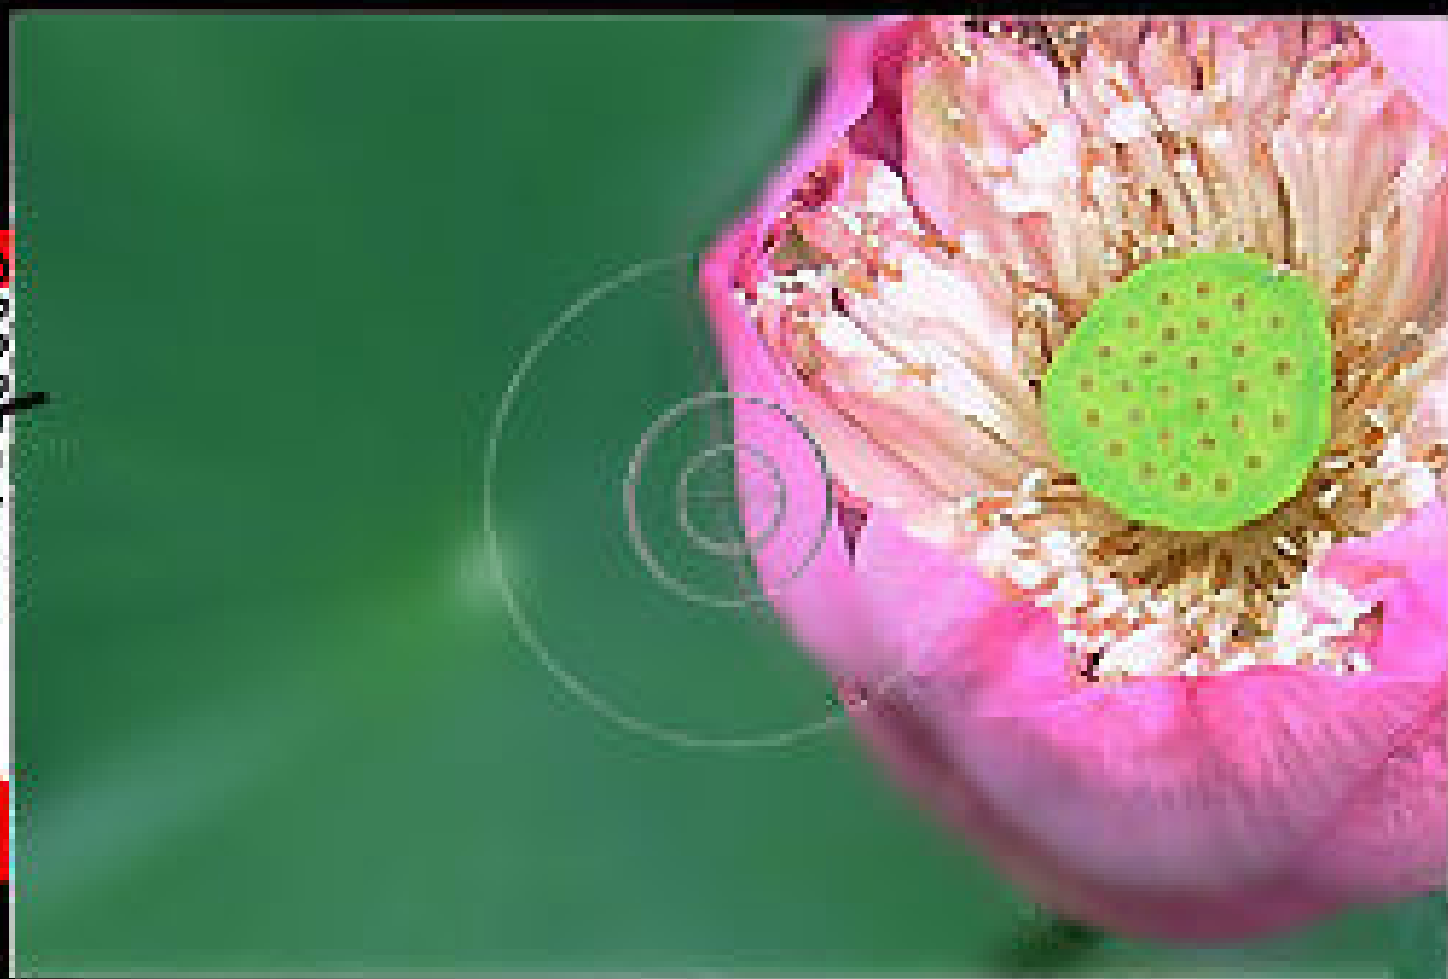




5.6








Lightly press
shutter button
to activate
metering

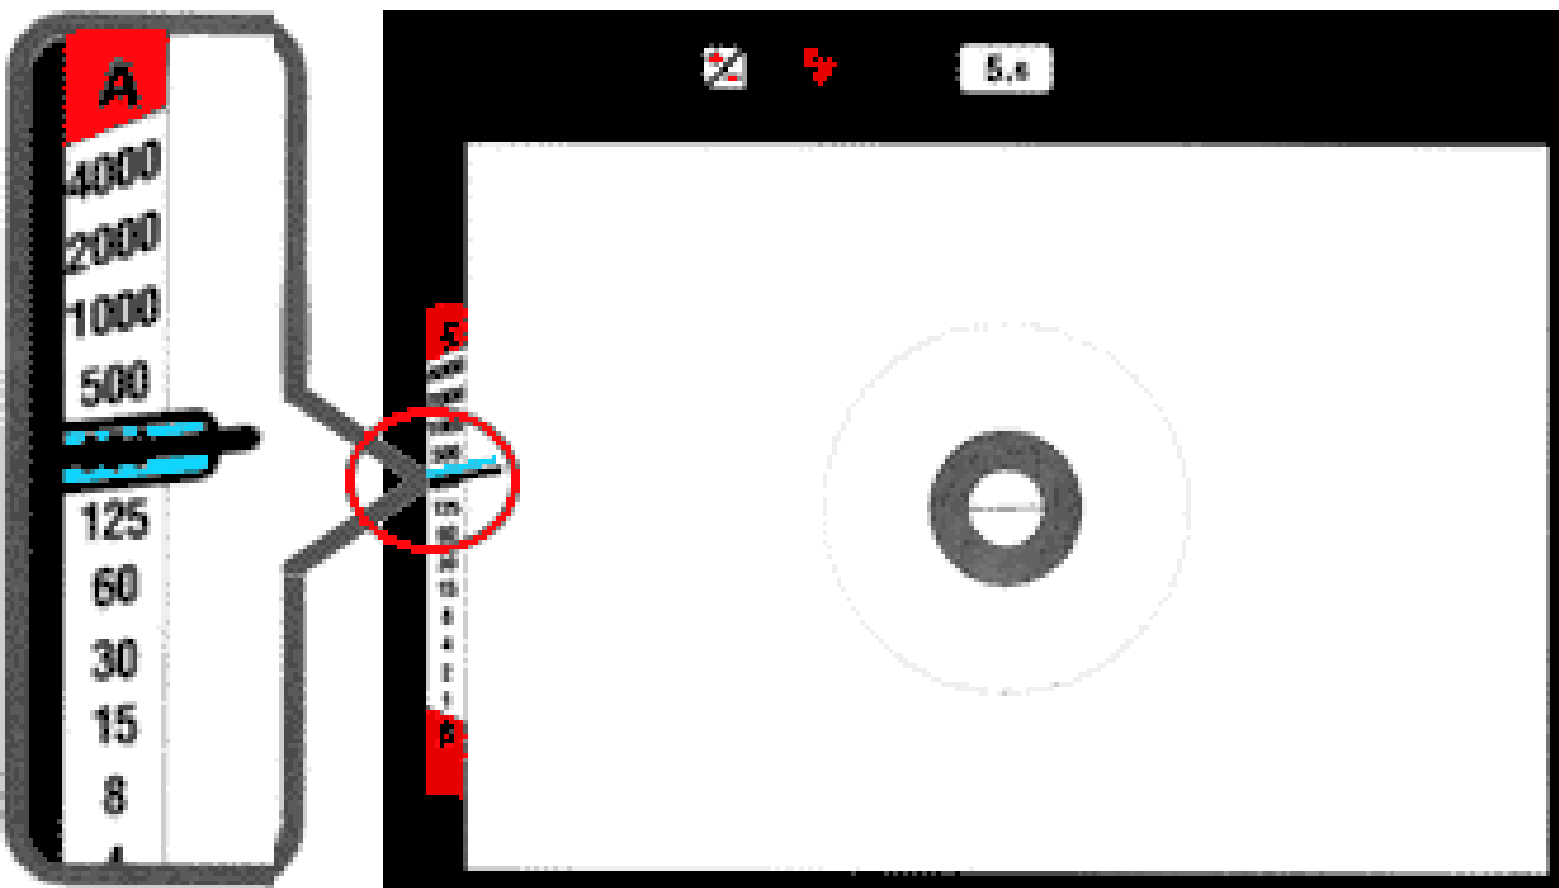





5.4

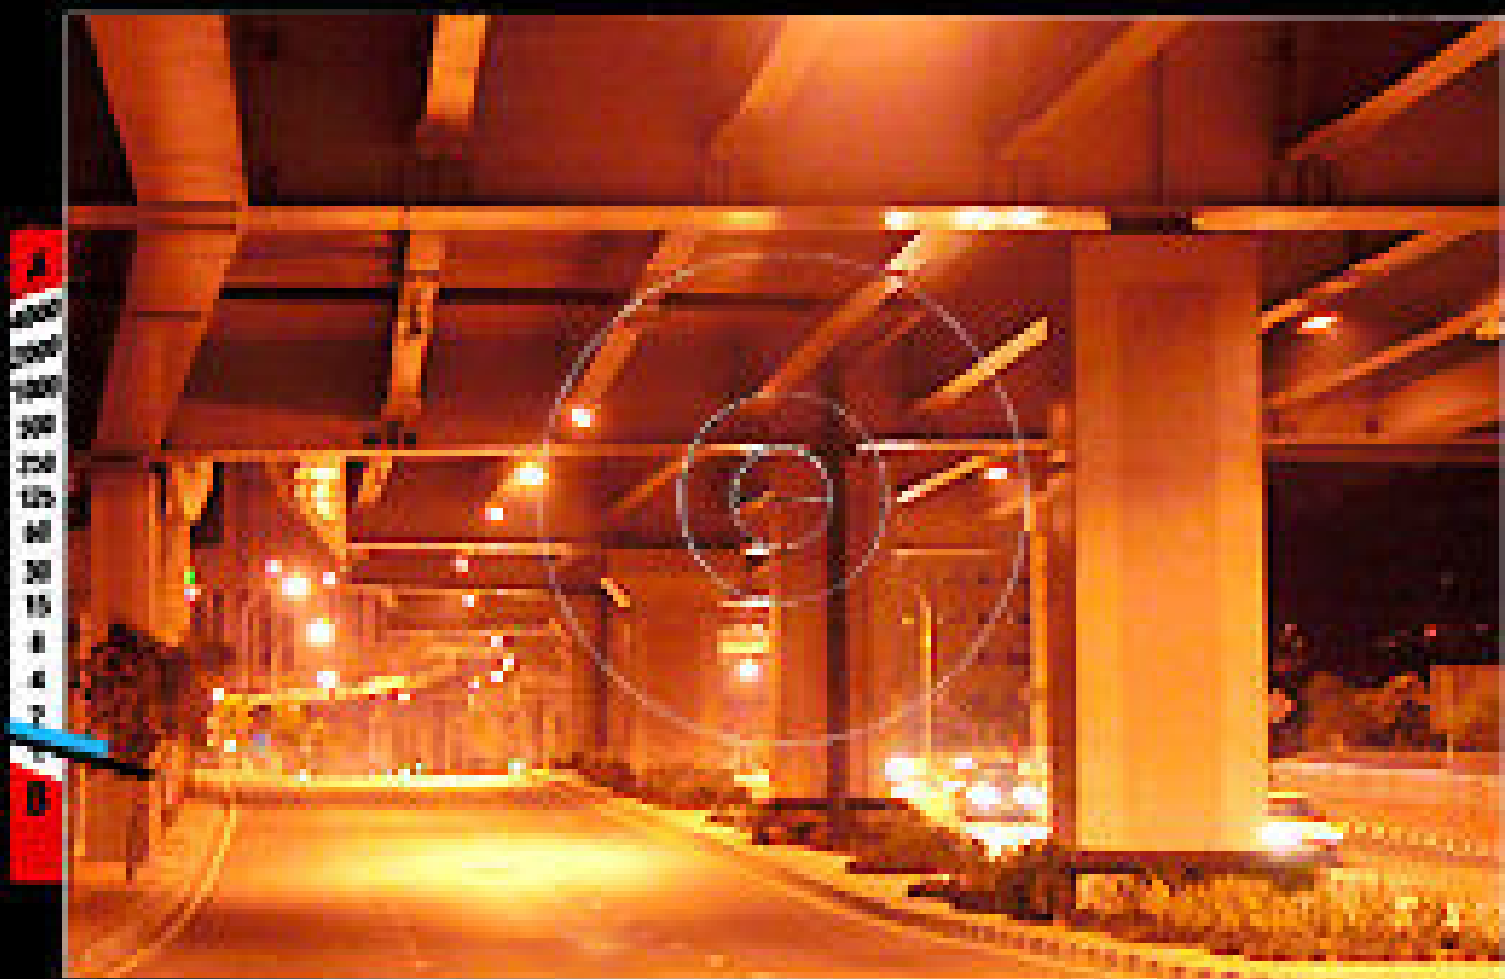







46.5mm













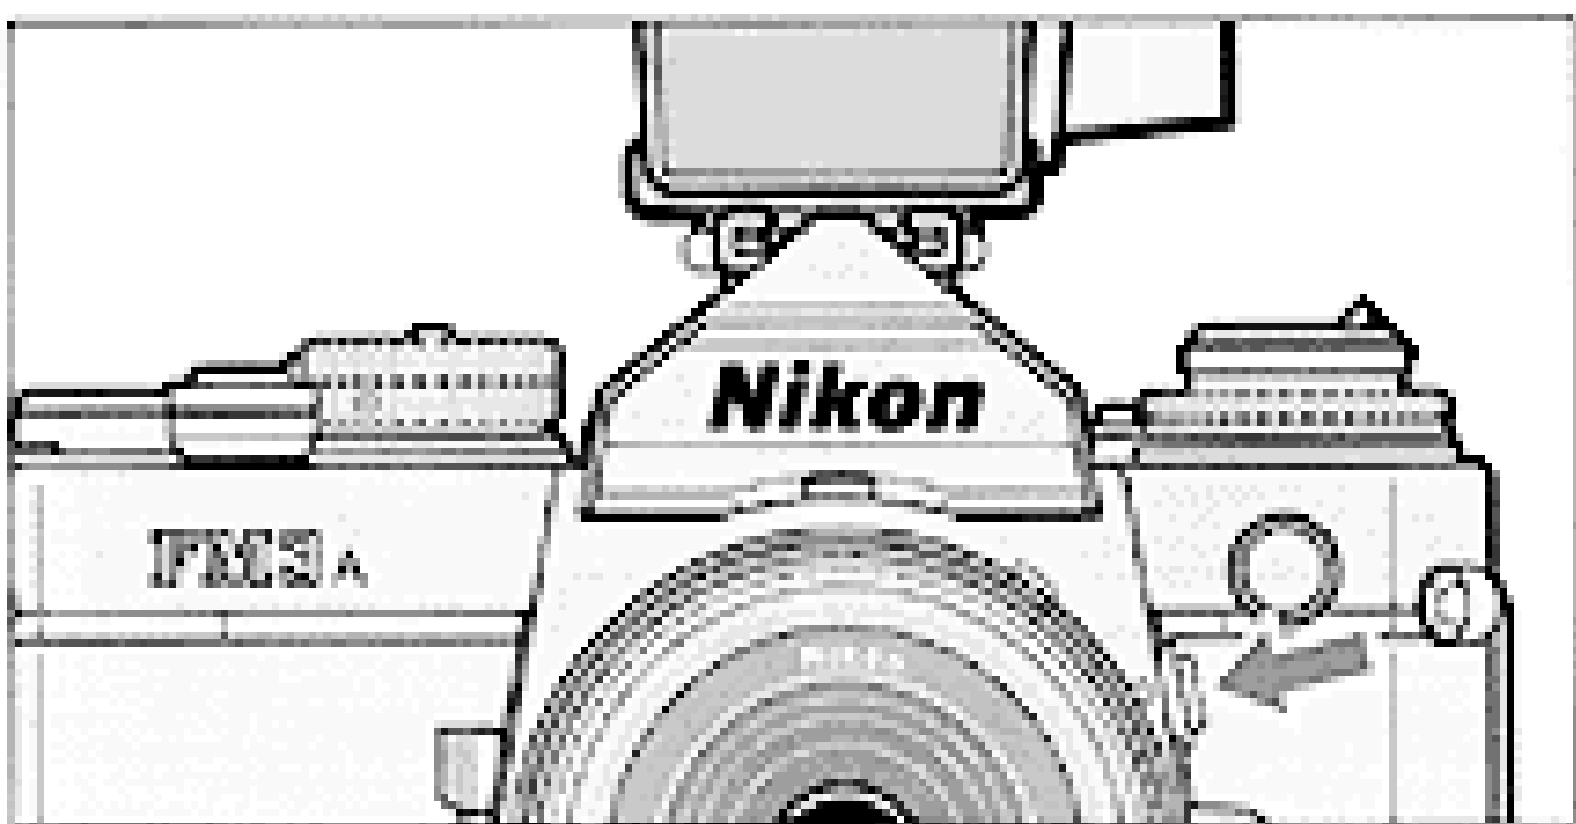









5.4

Flash Readylight



(Example: with SB-27)

