






















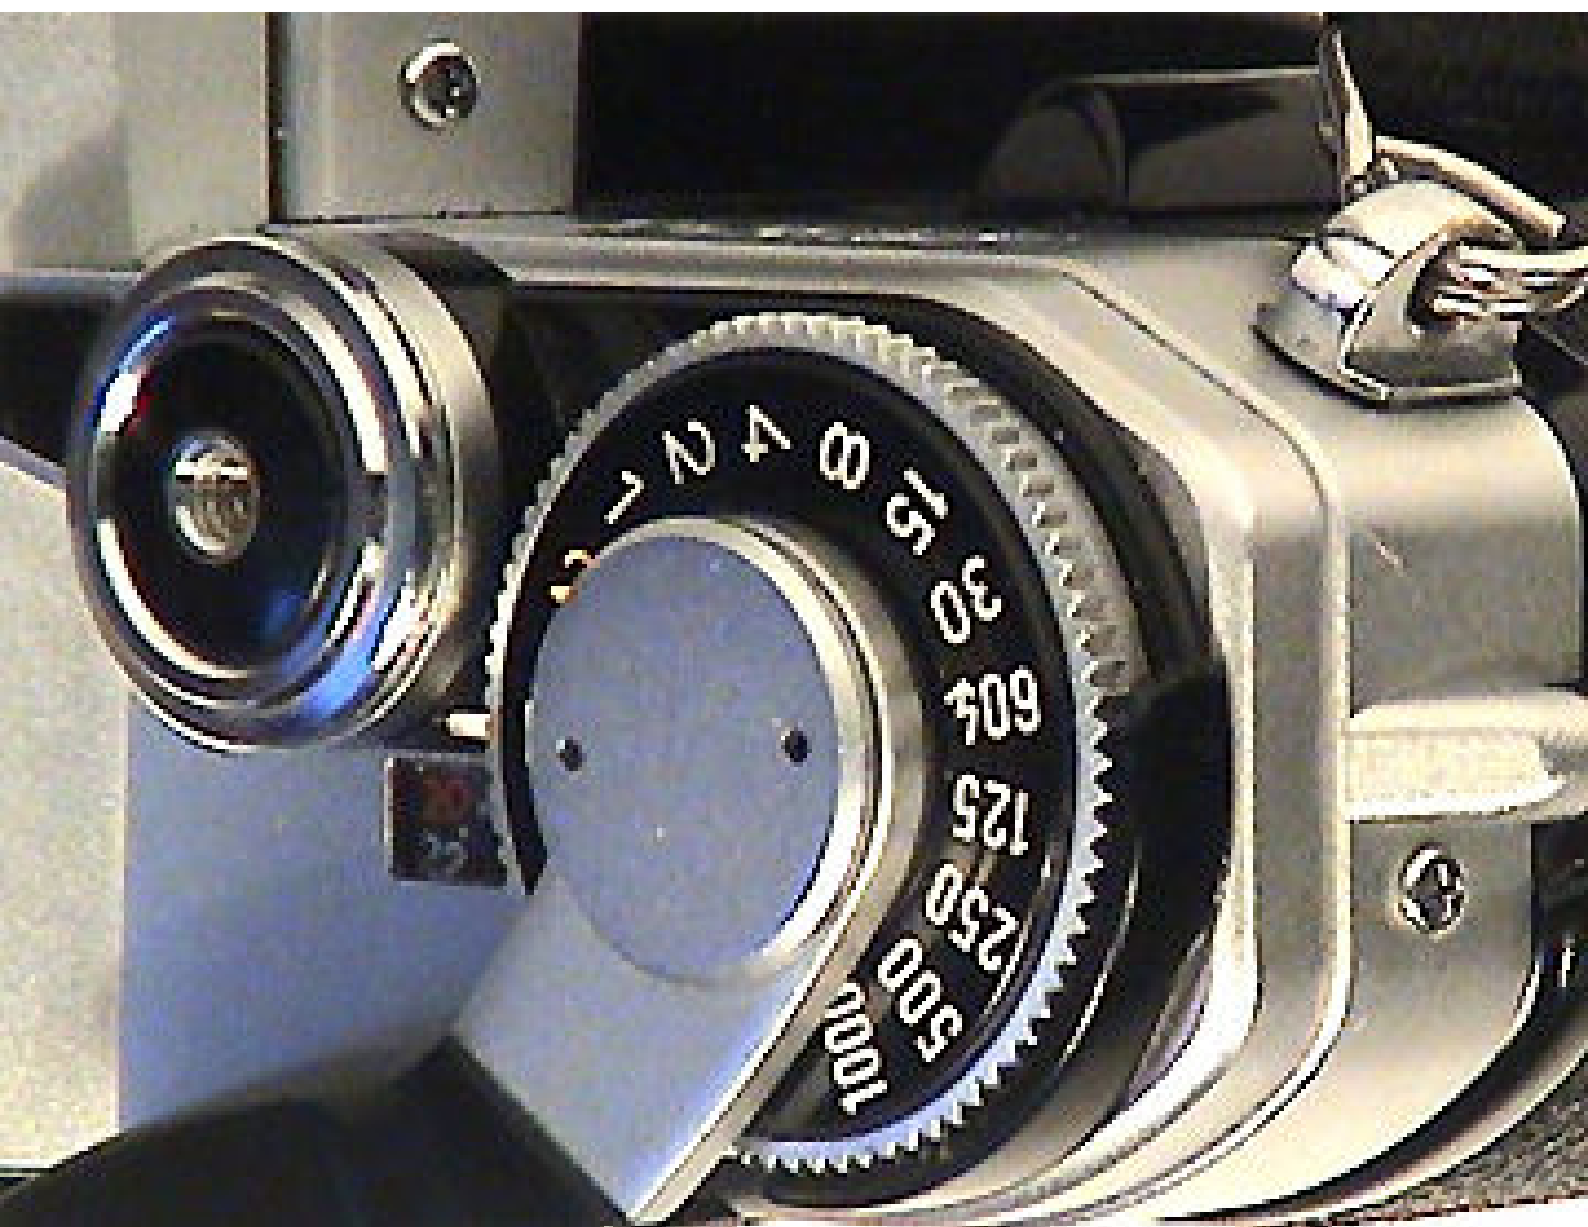




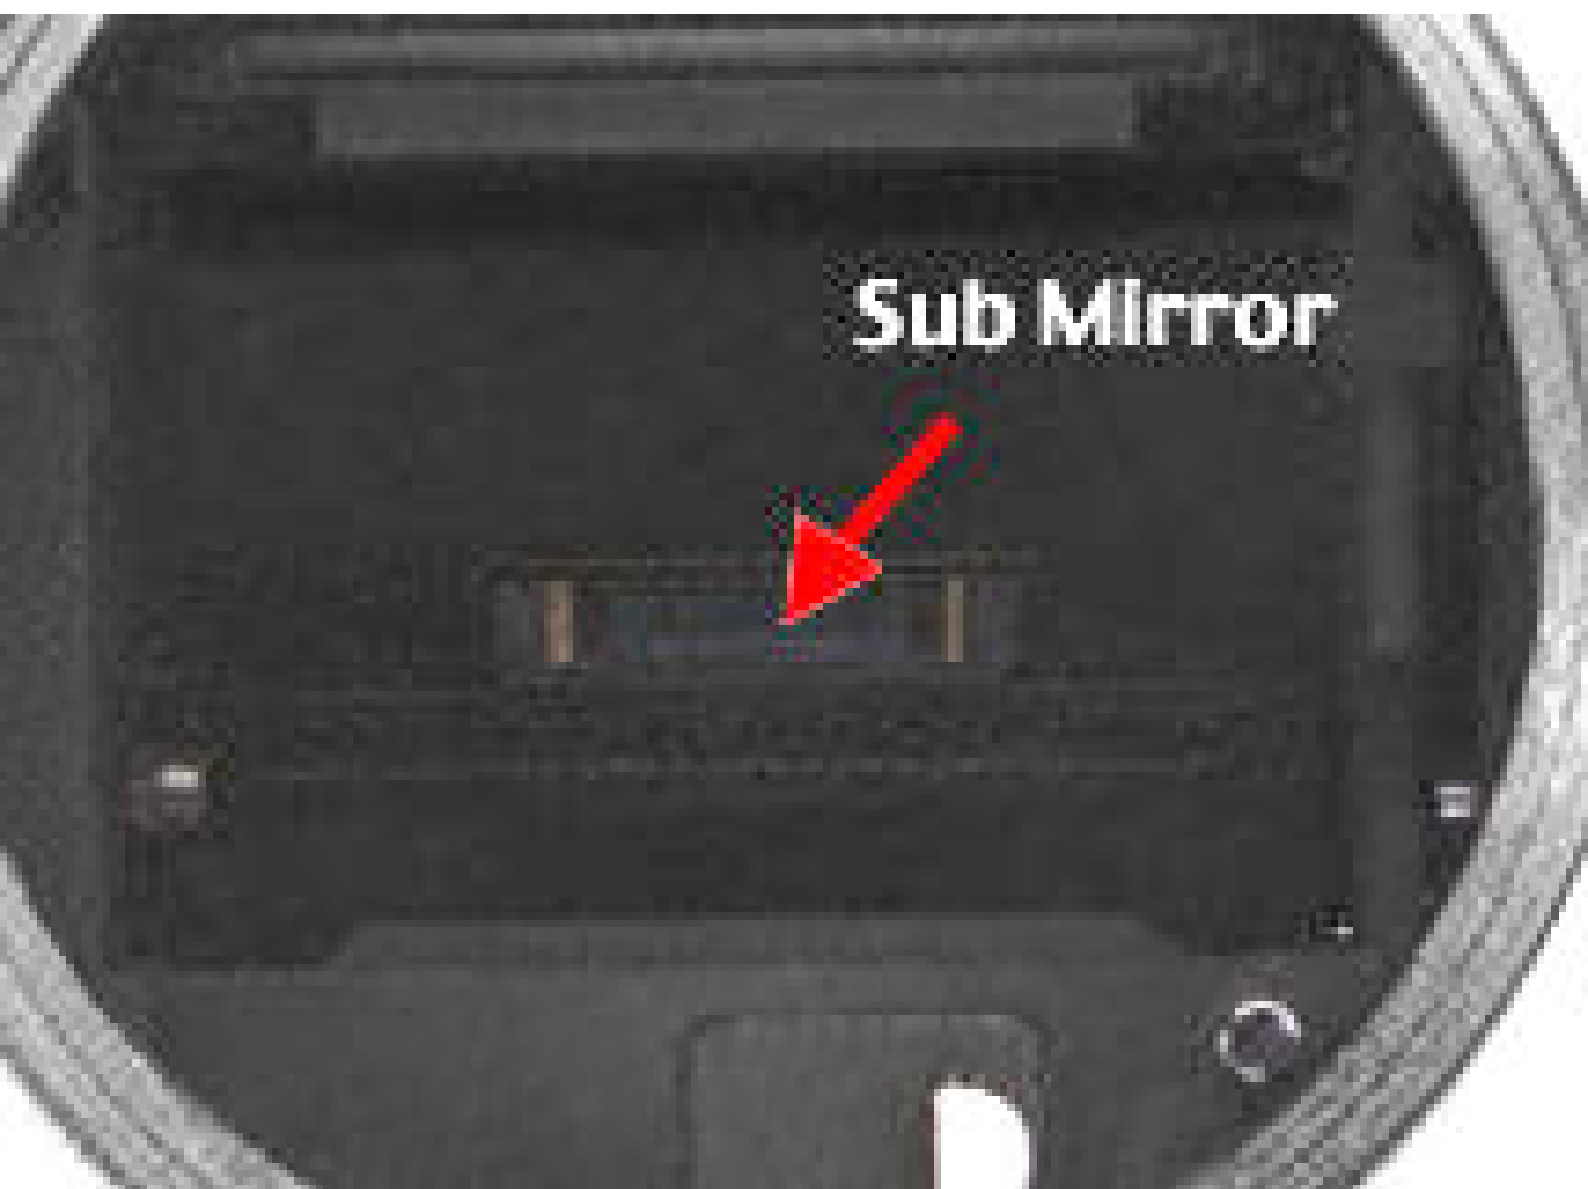



Sub Mirror

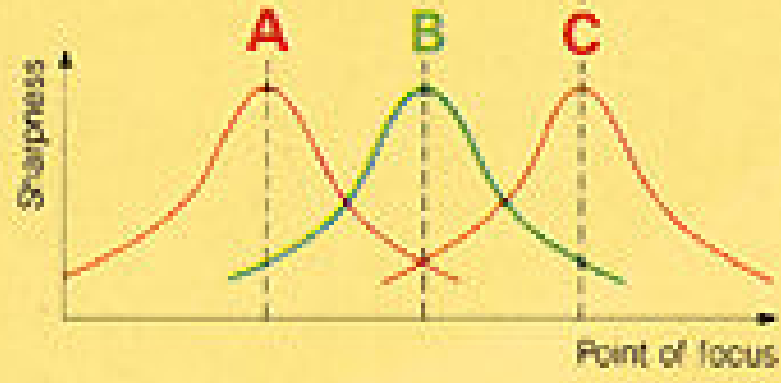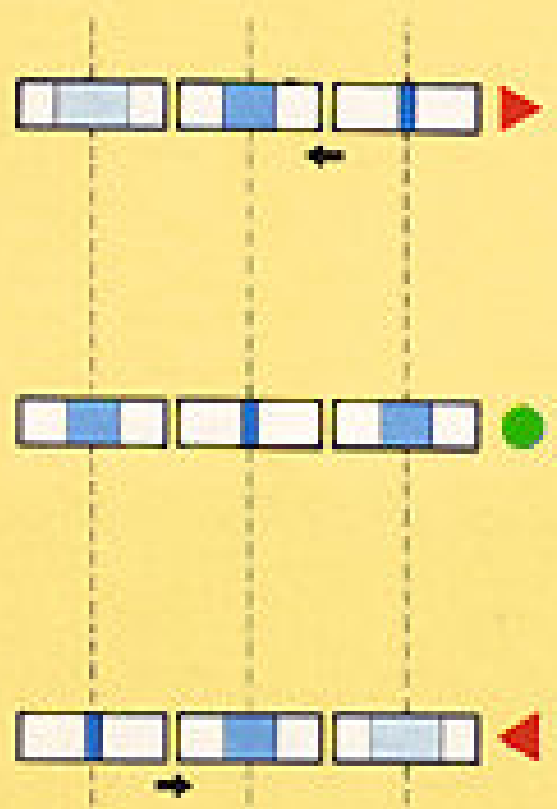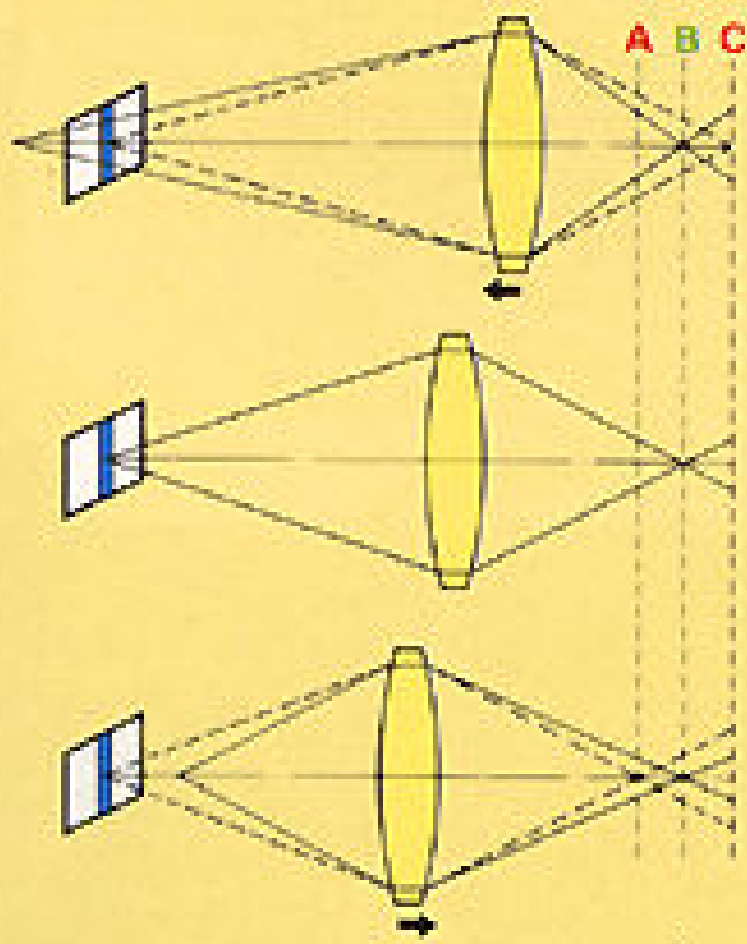


The solid lines indicate the light rays focused on the actual film plane and the dotted lines indicate the light rays from the subject focused on one of the three sensors A, B or C.

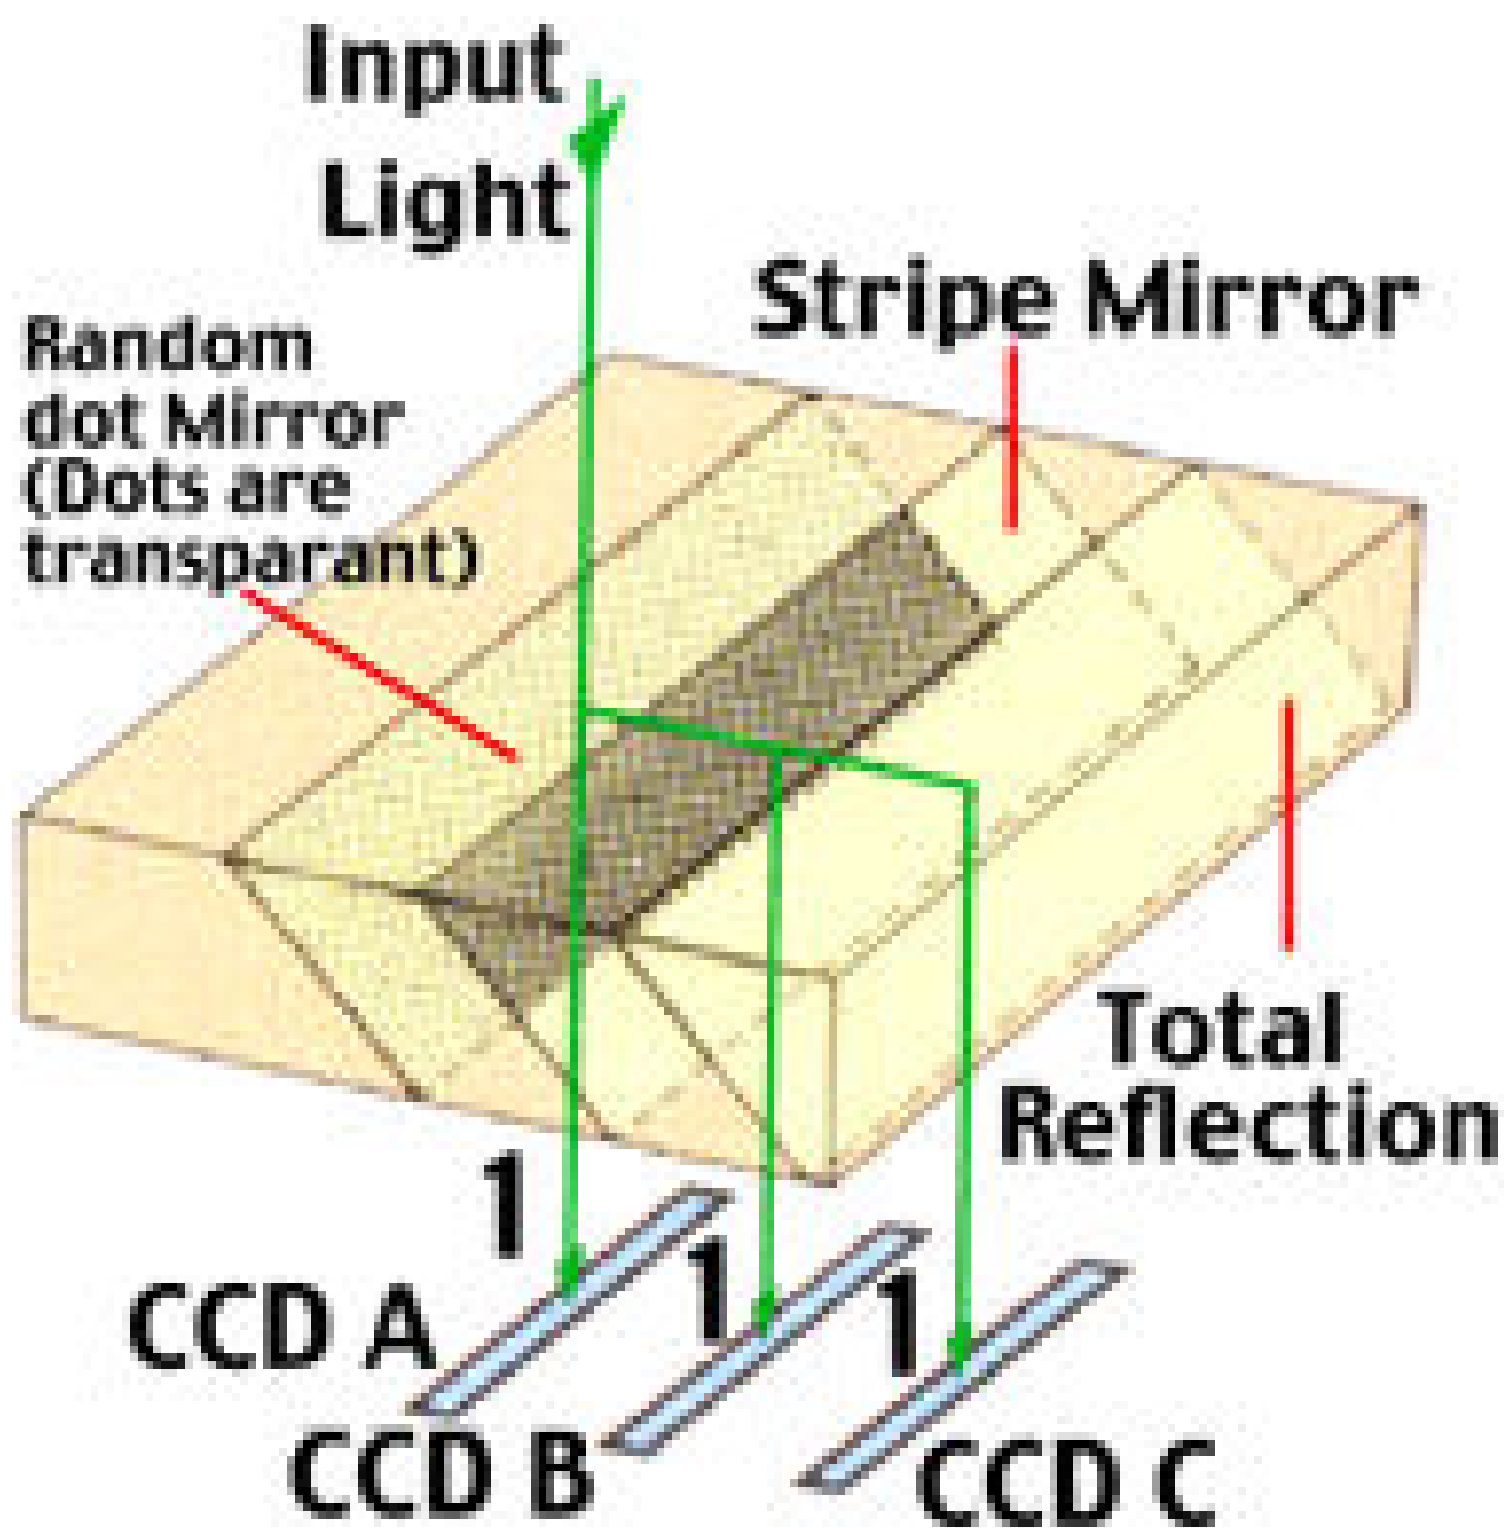

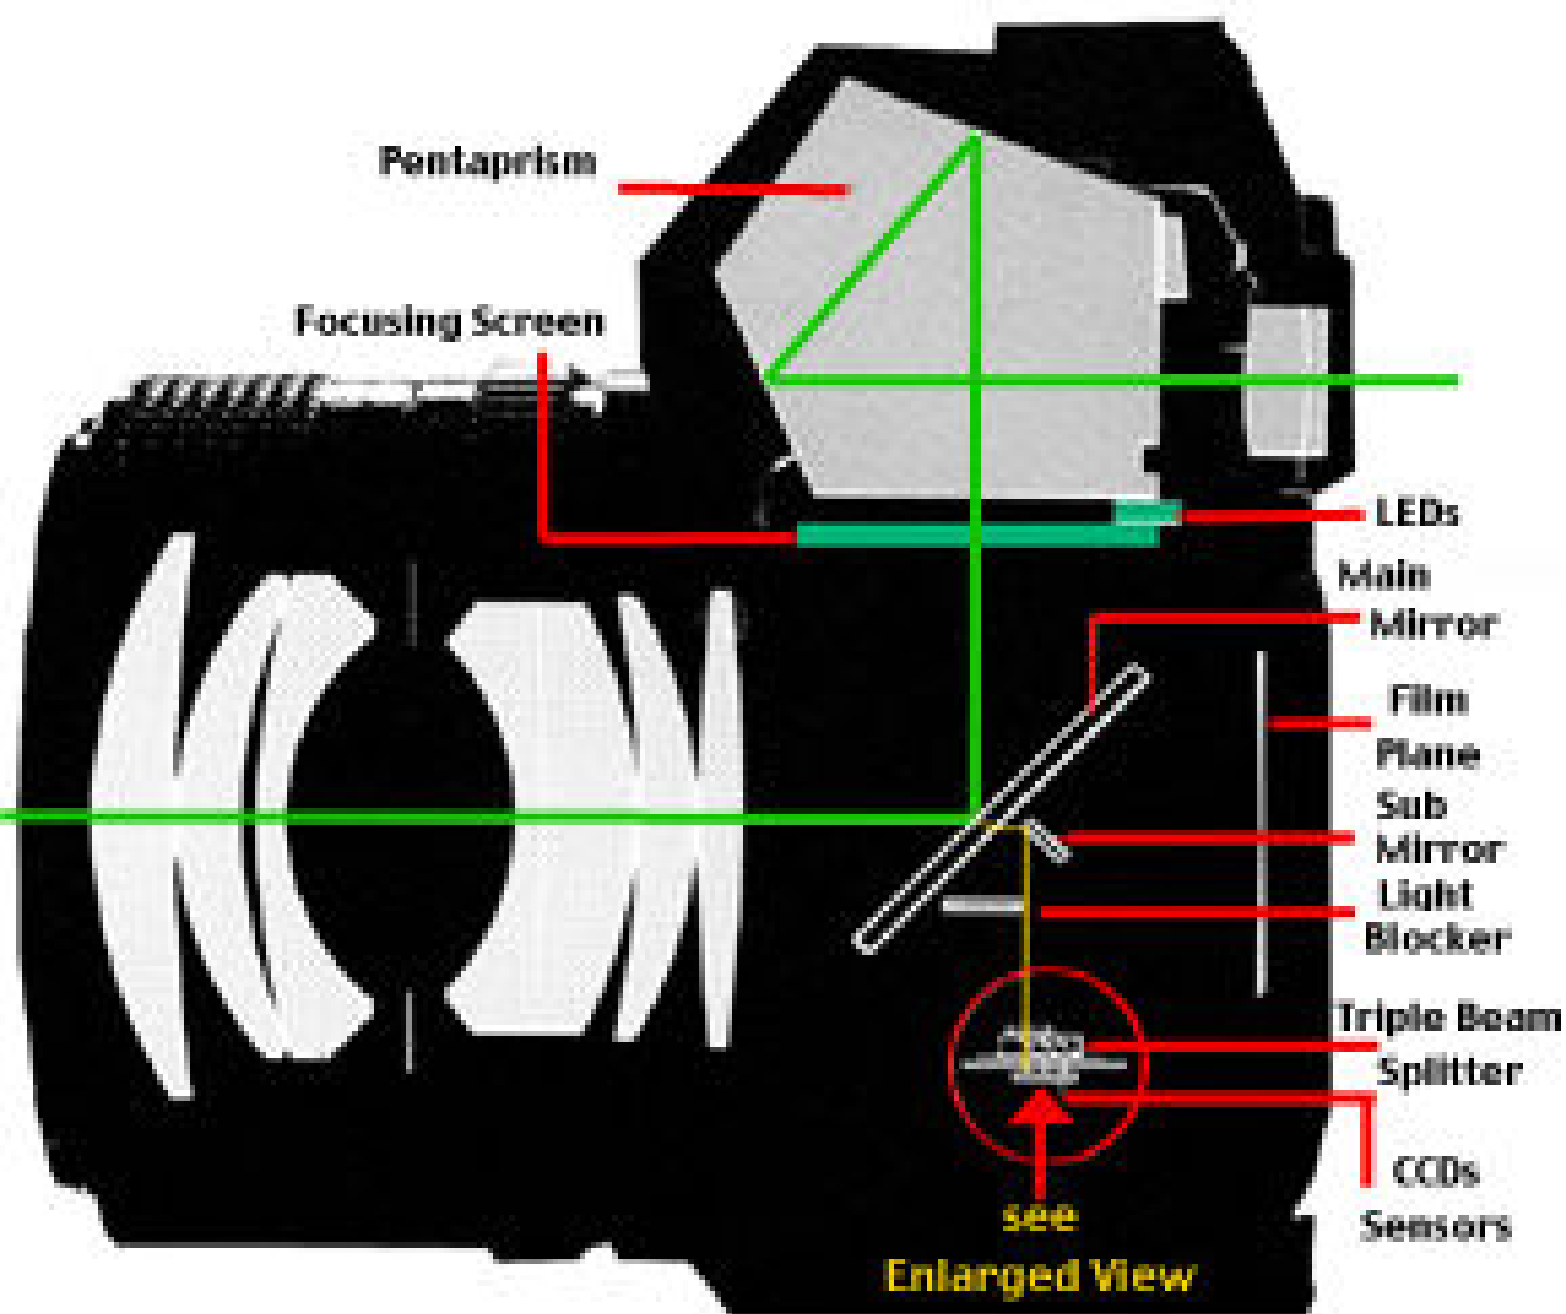

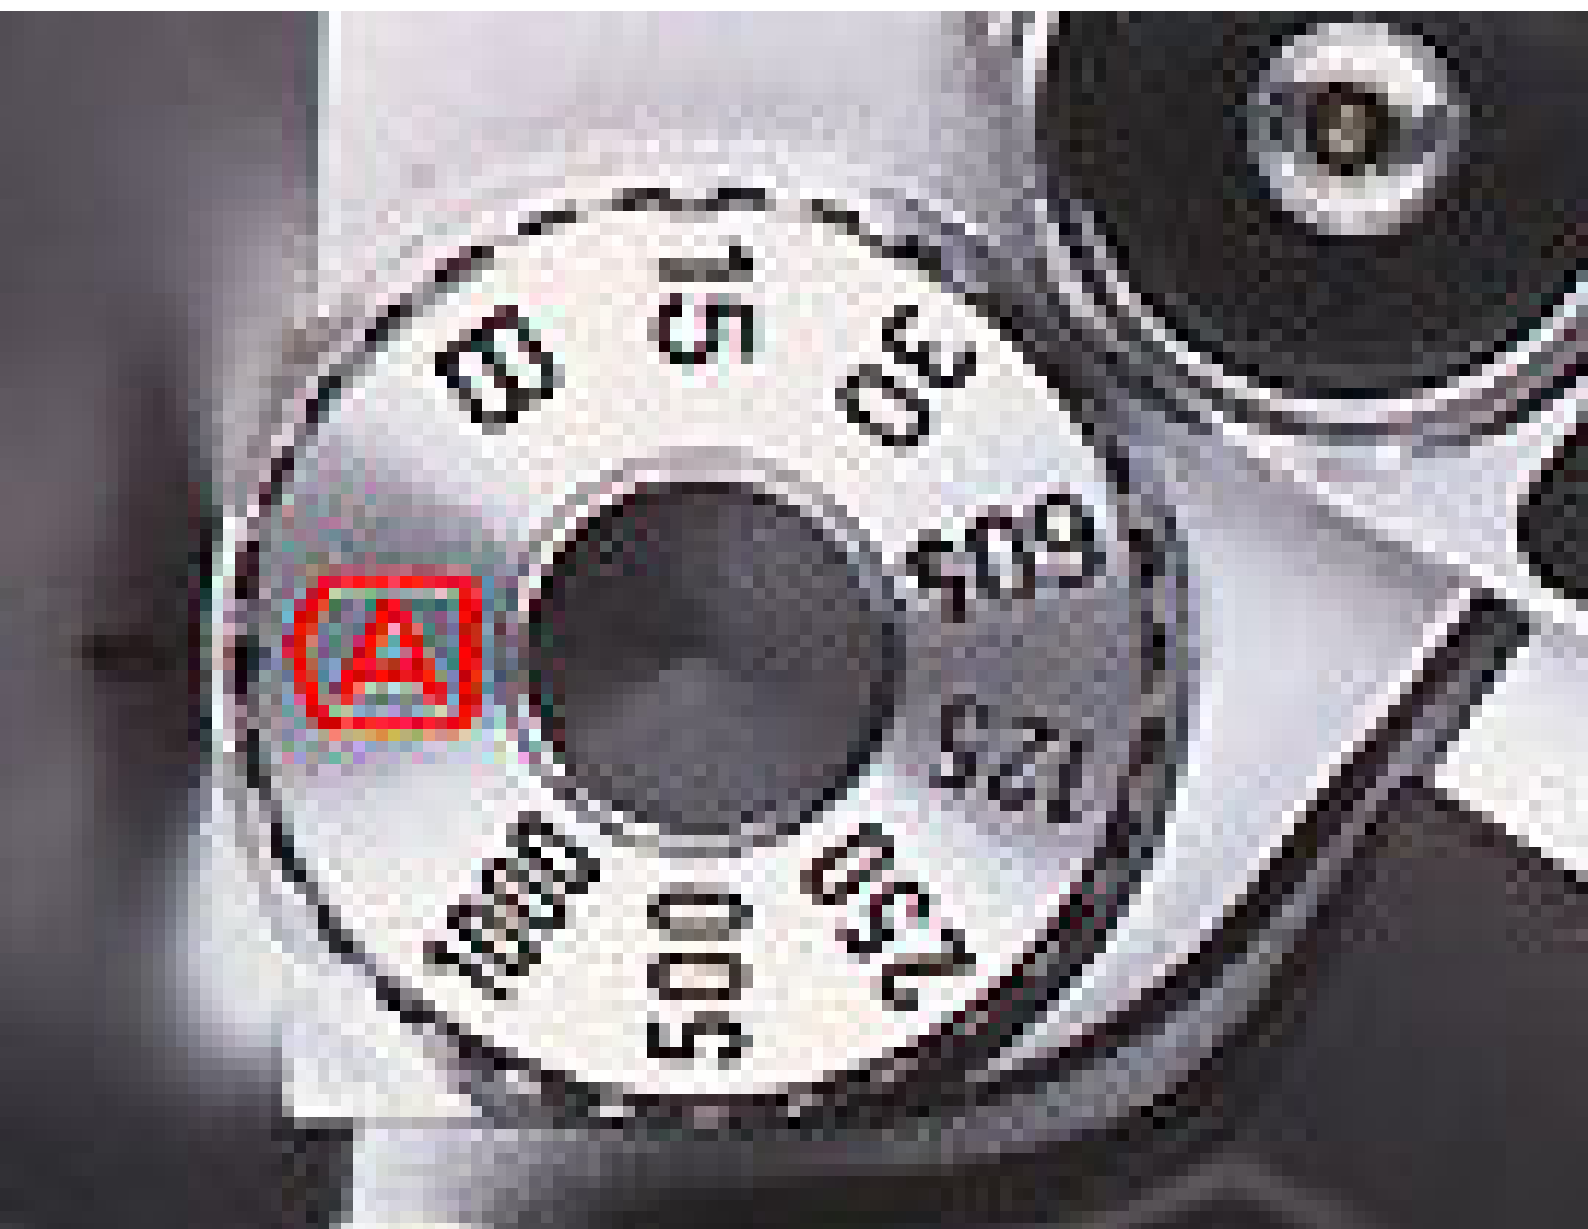




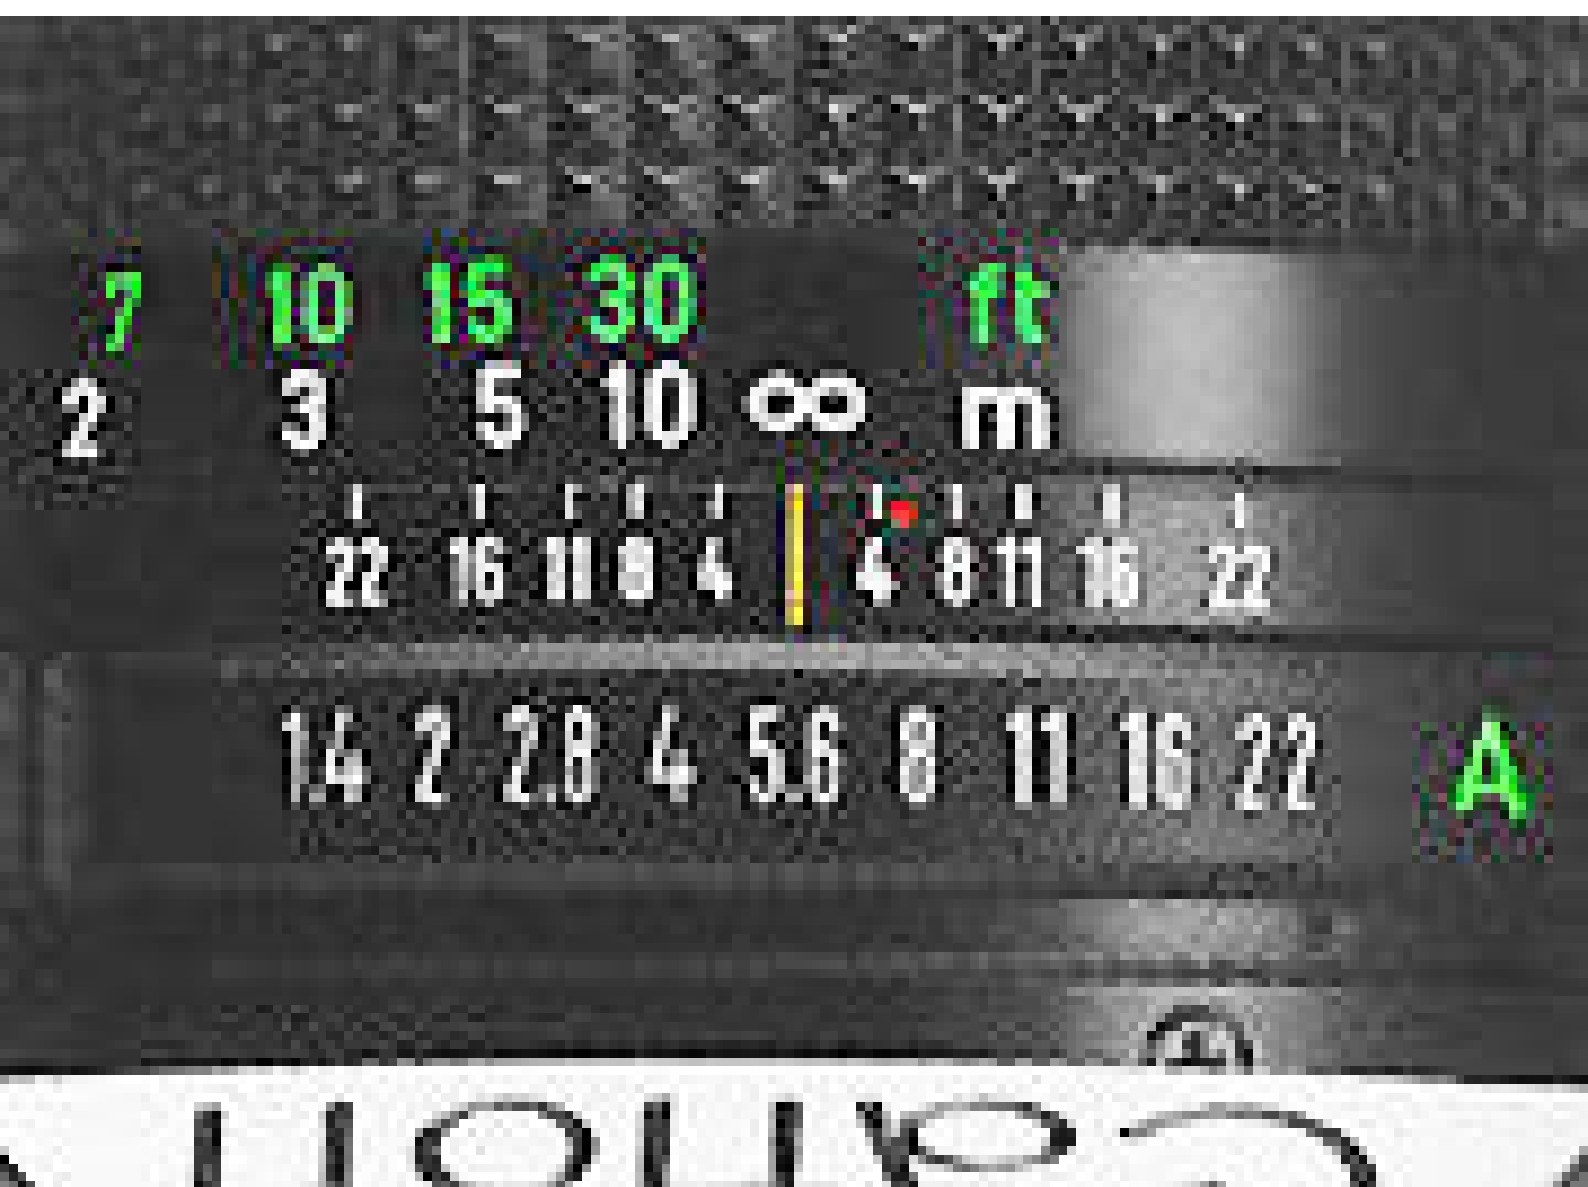






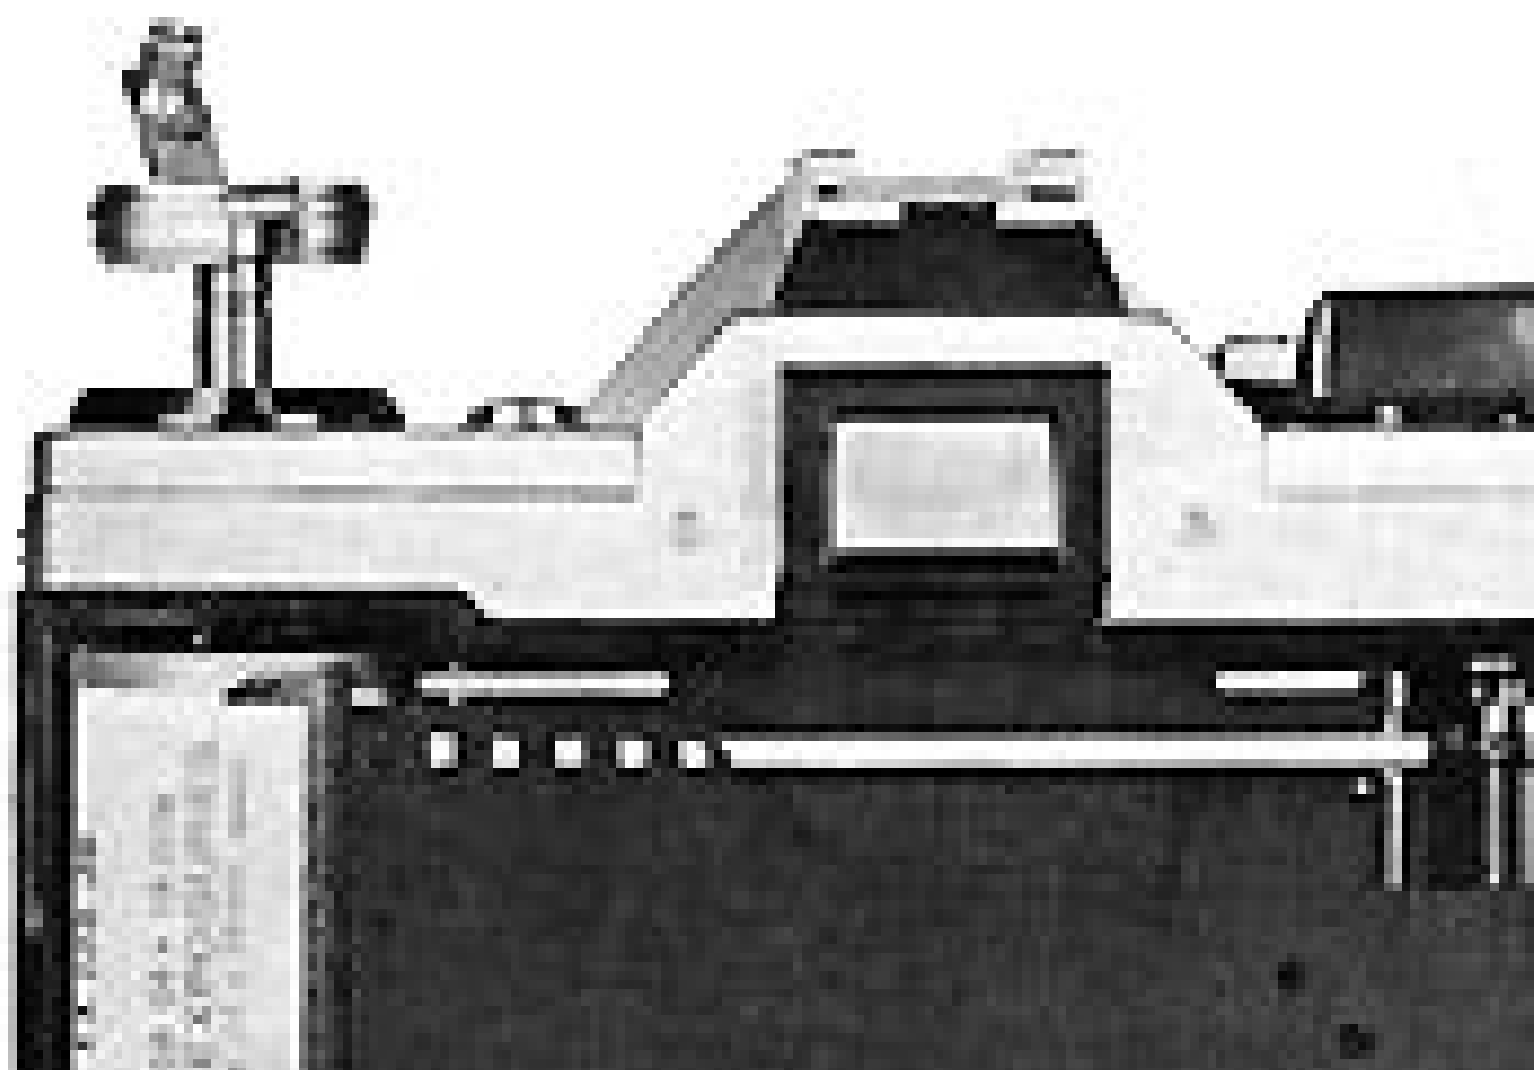





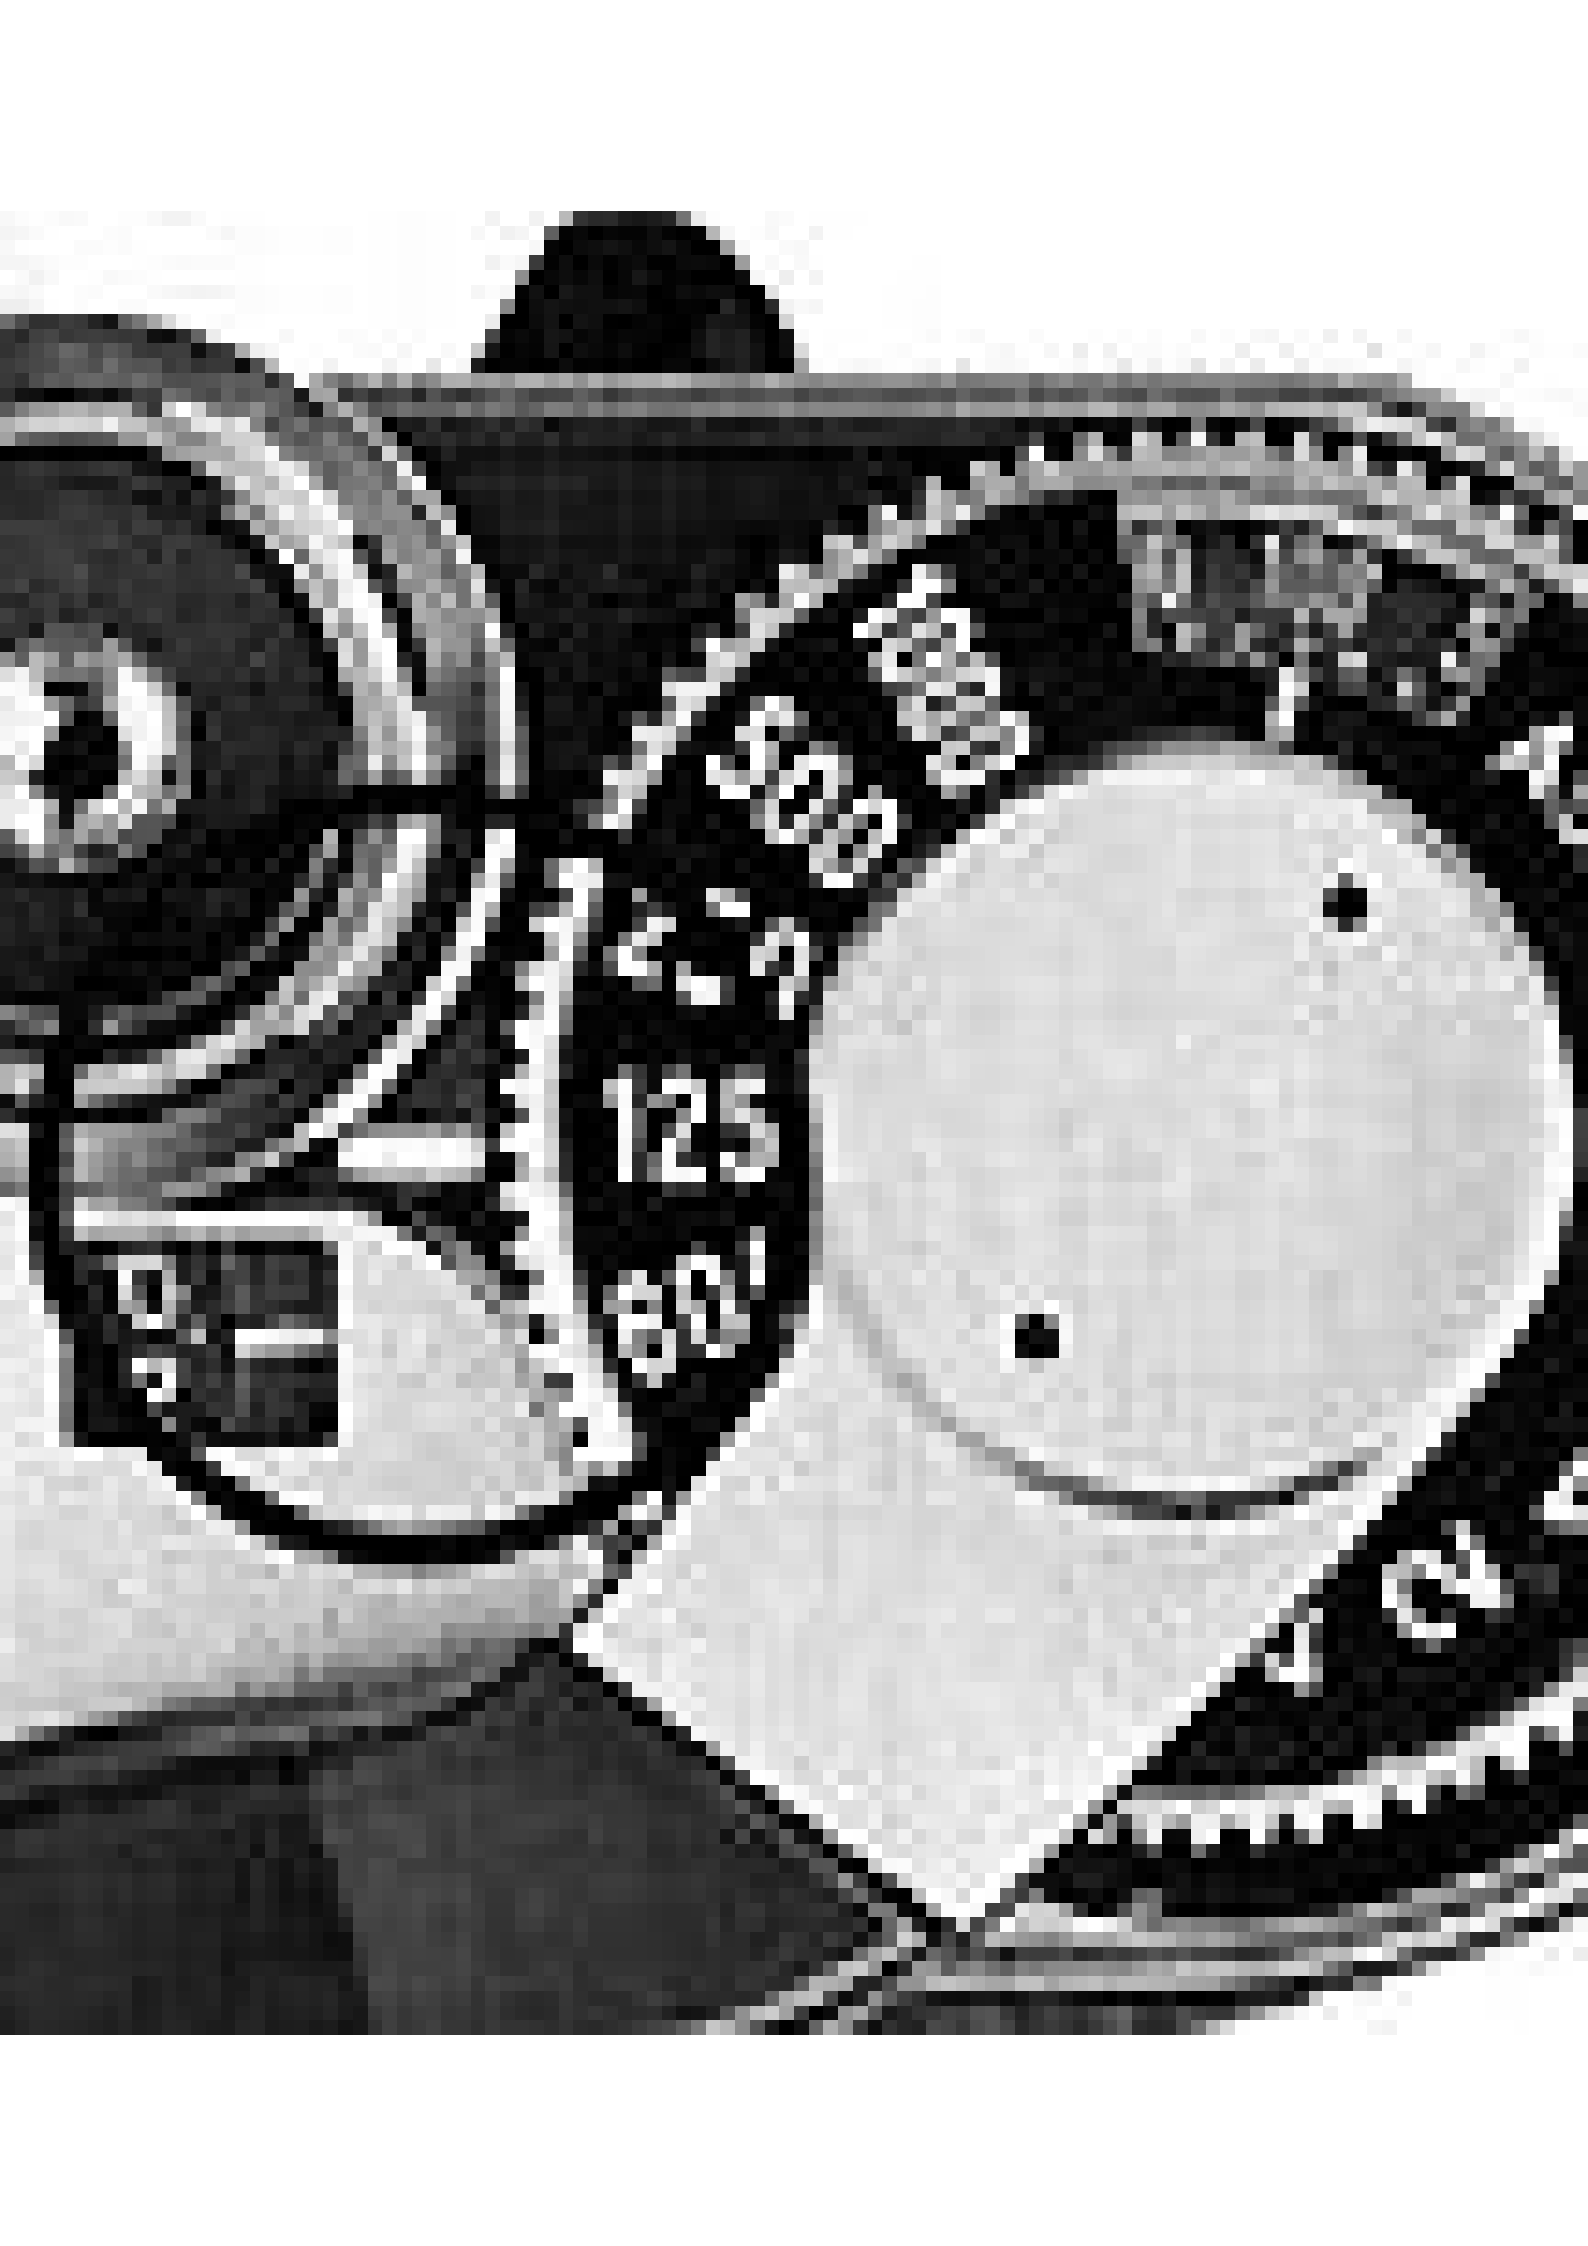



Out of Focus

In Focus









Winder Coupler Cover




Canon's AE-1 CPU Control

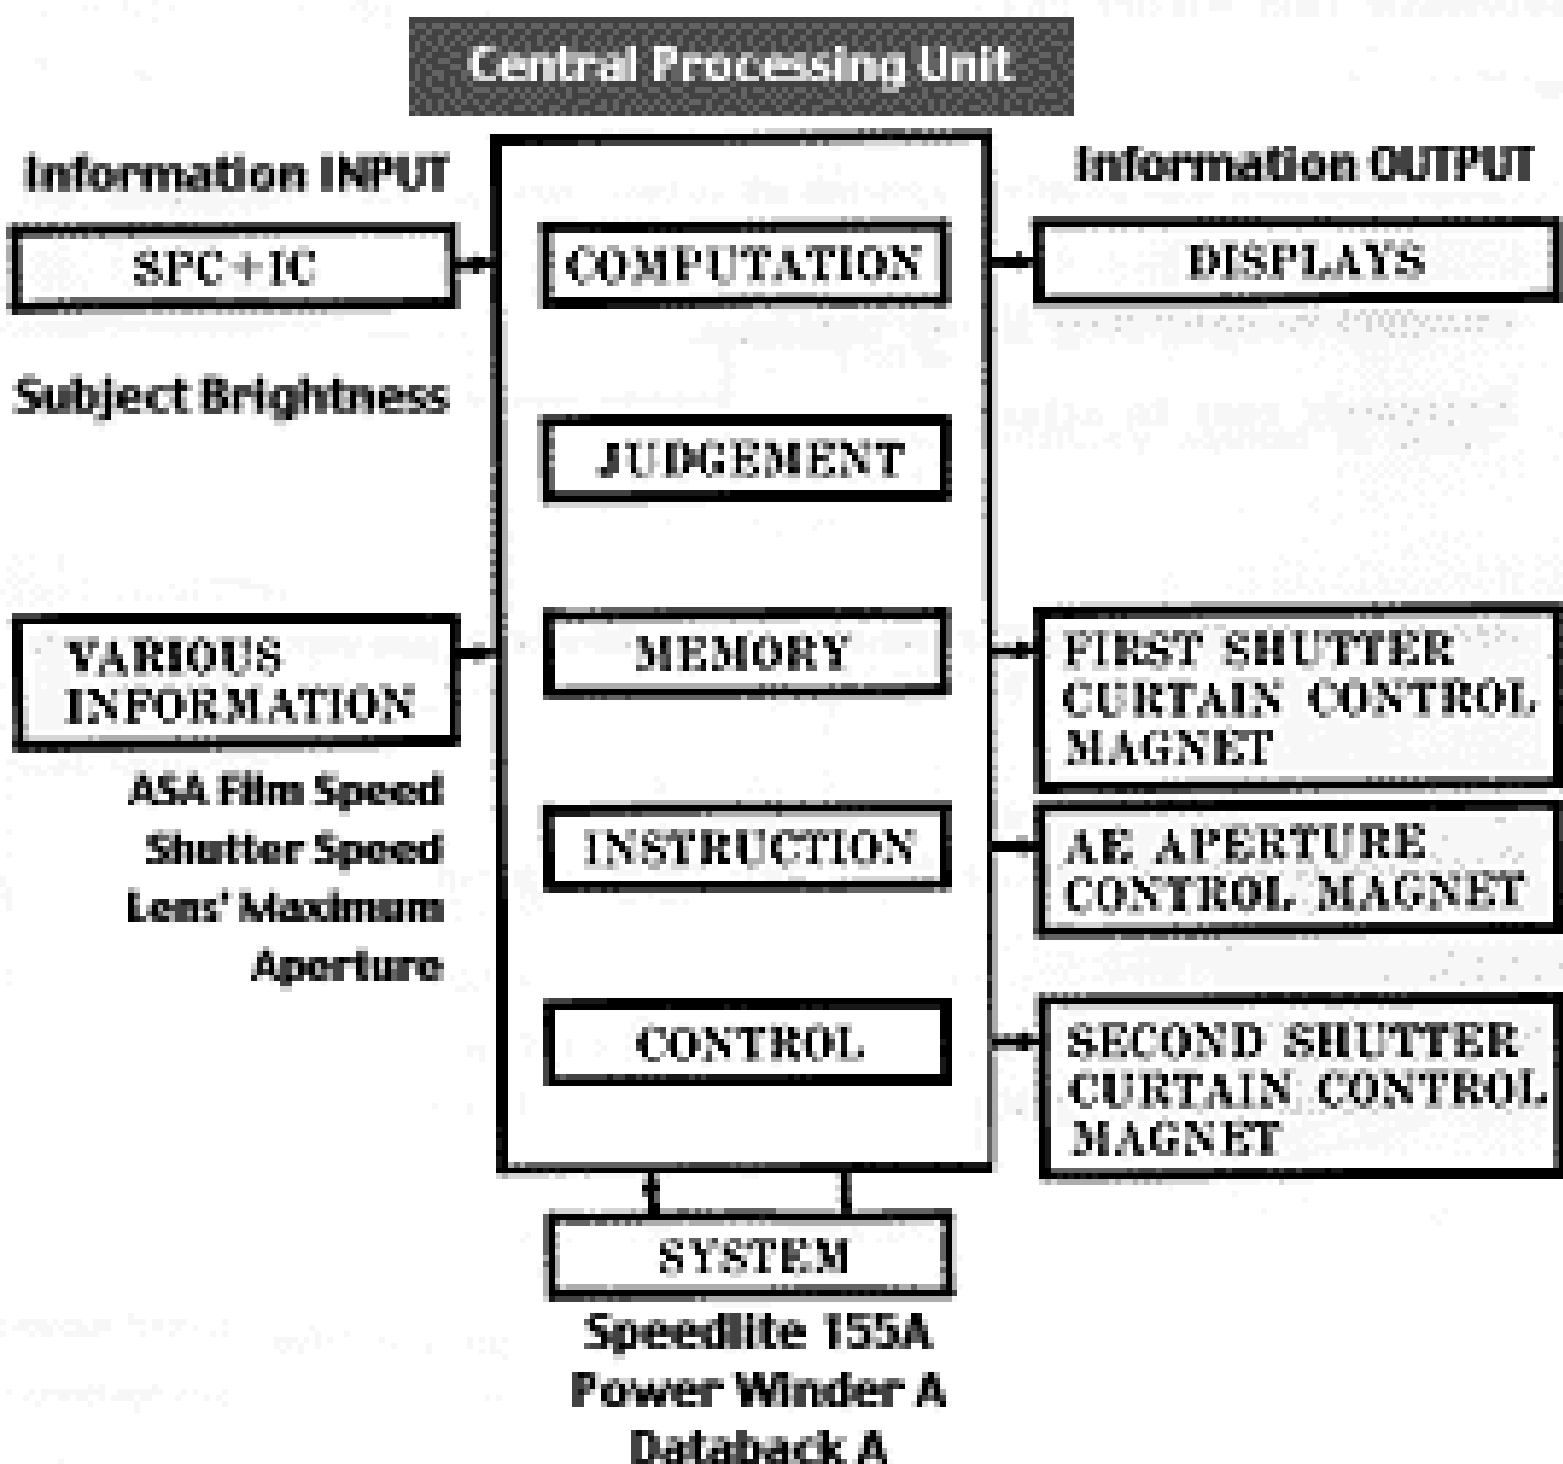


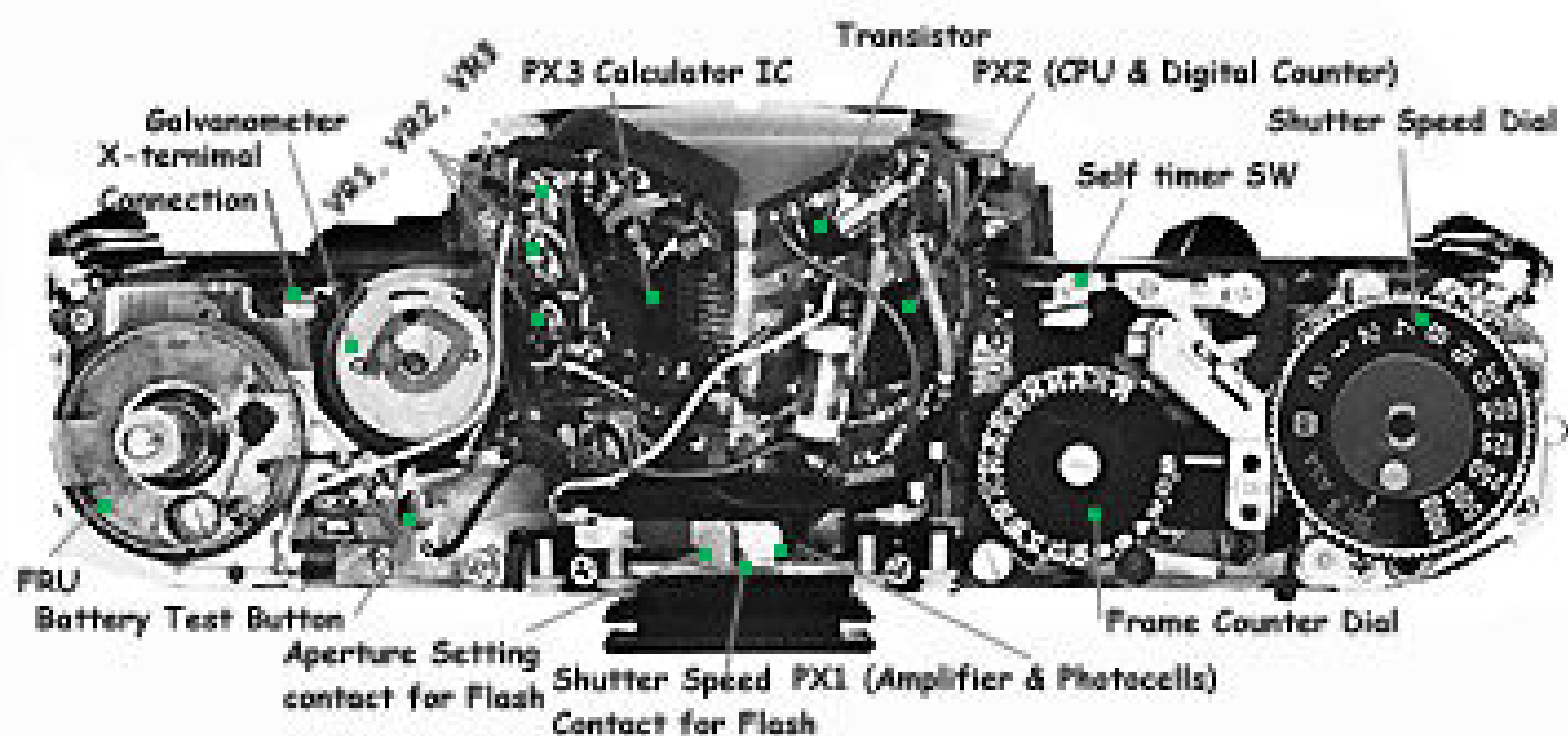







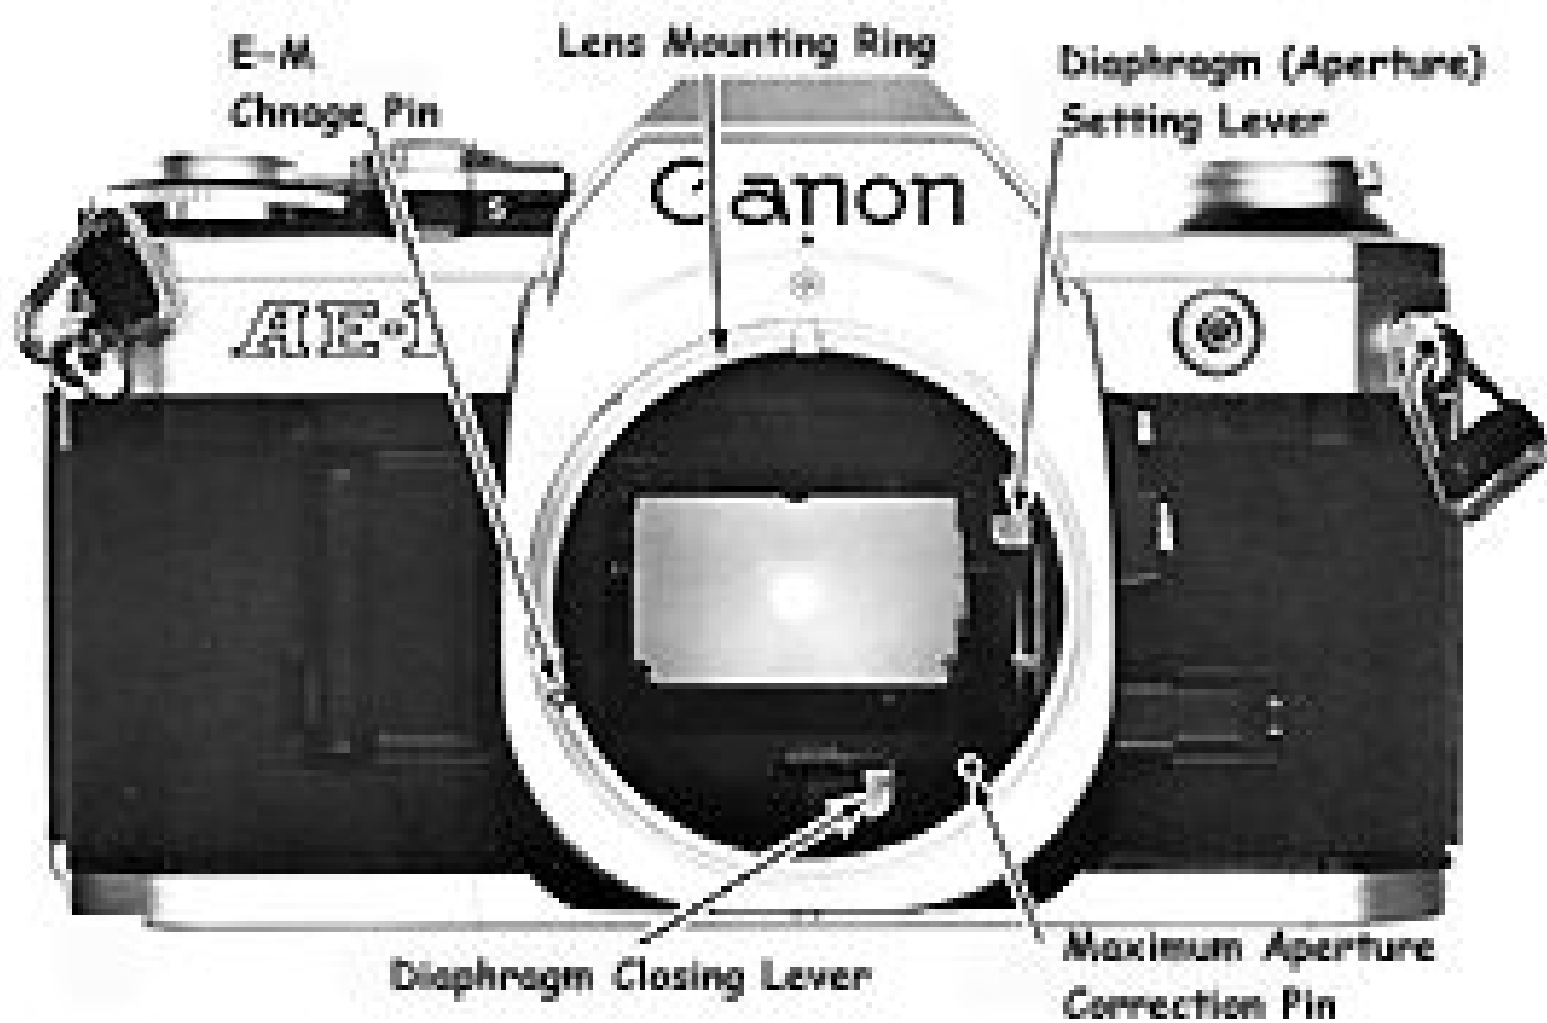

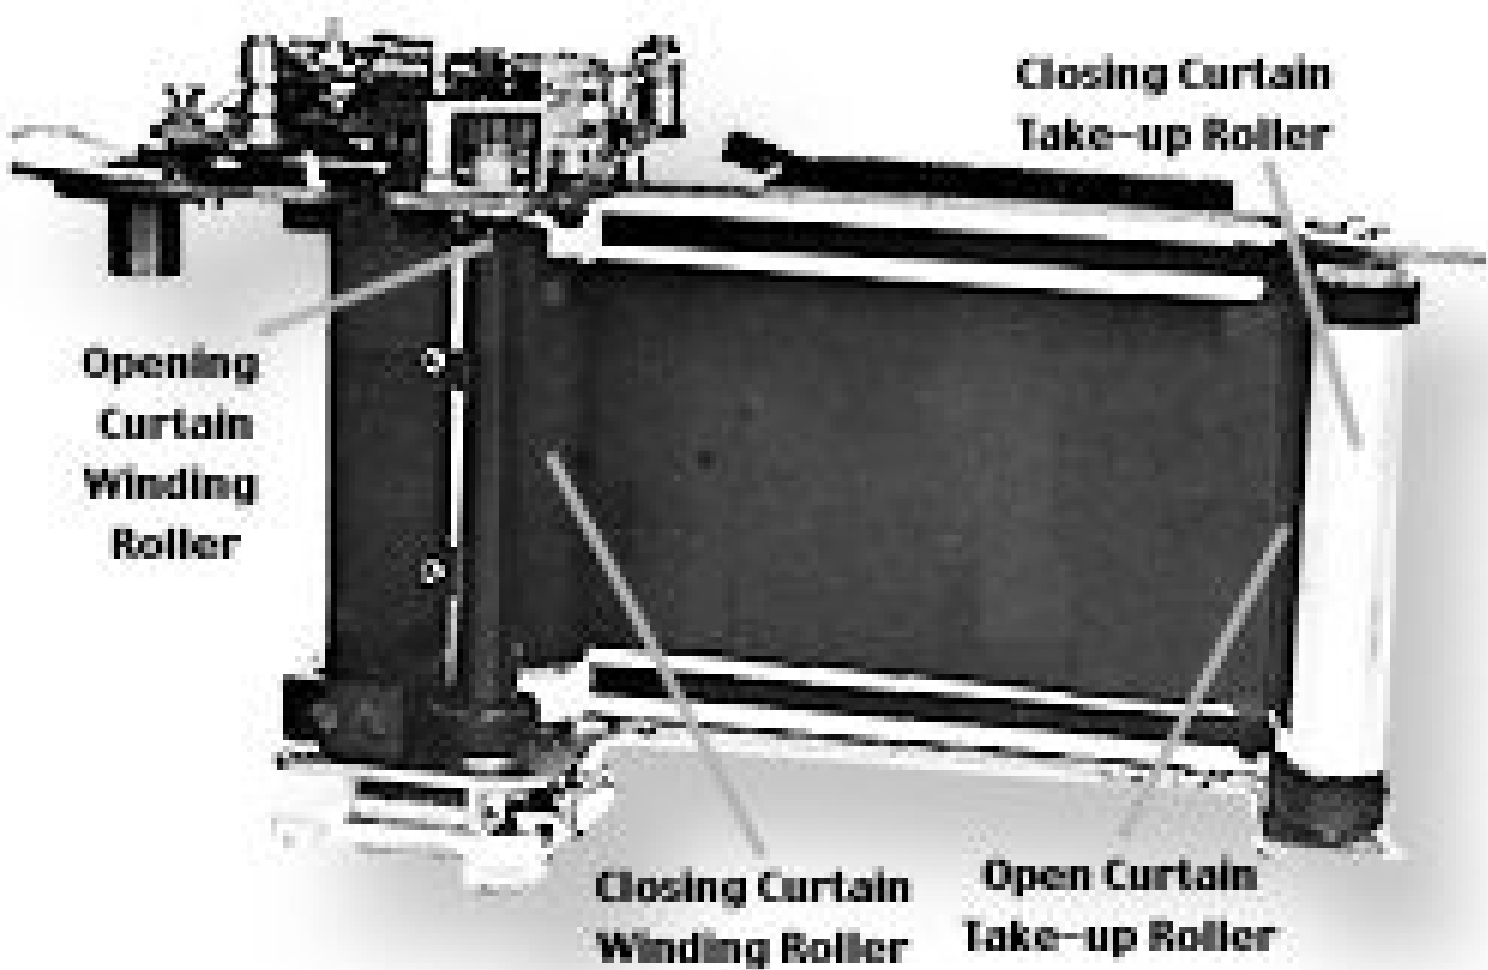

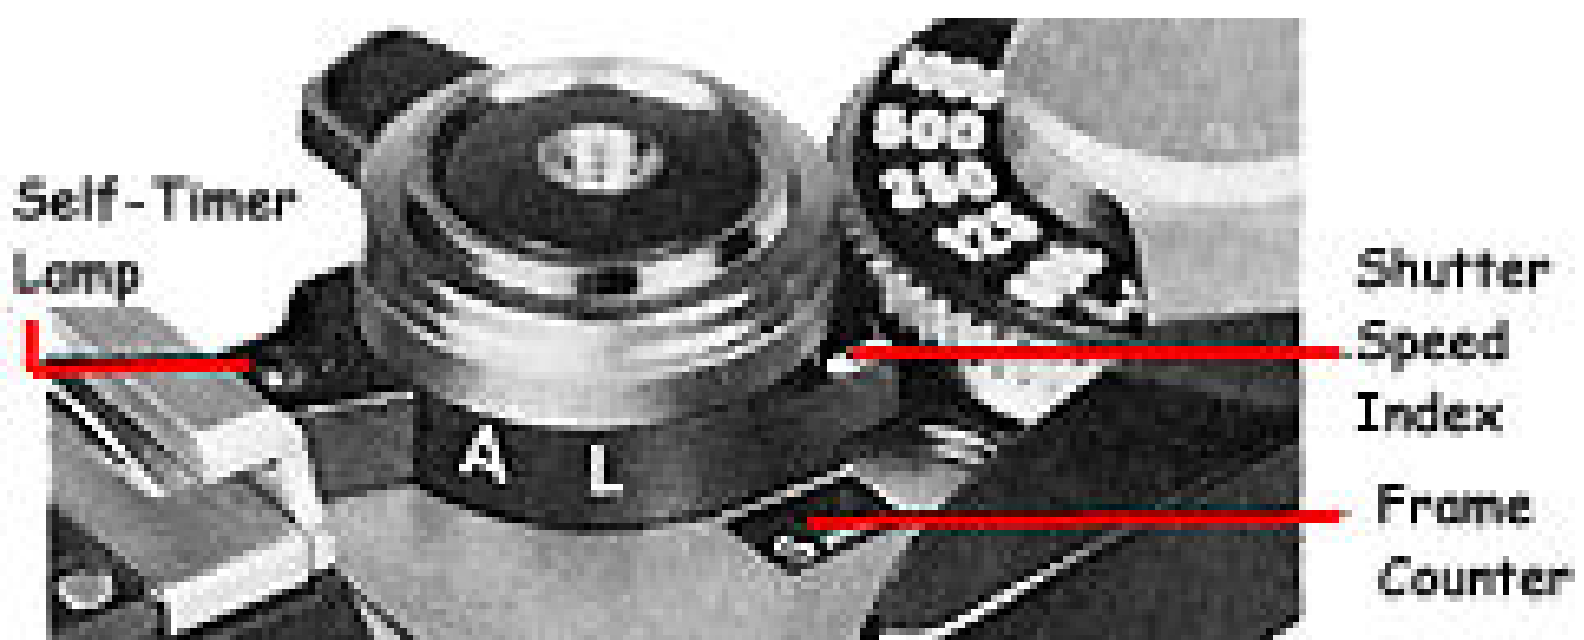


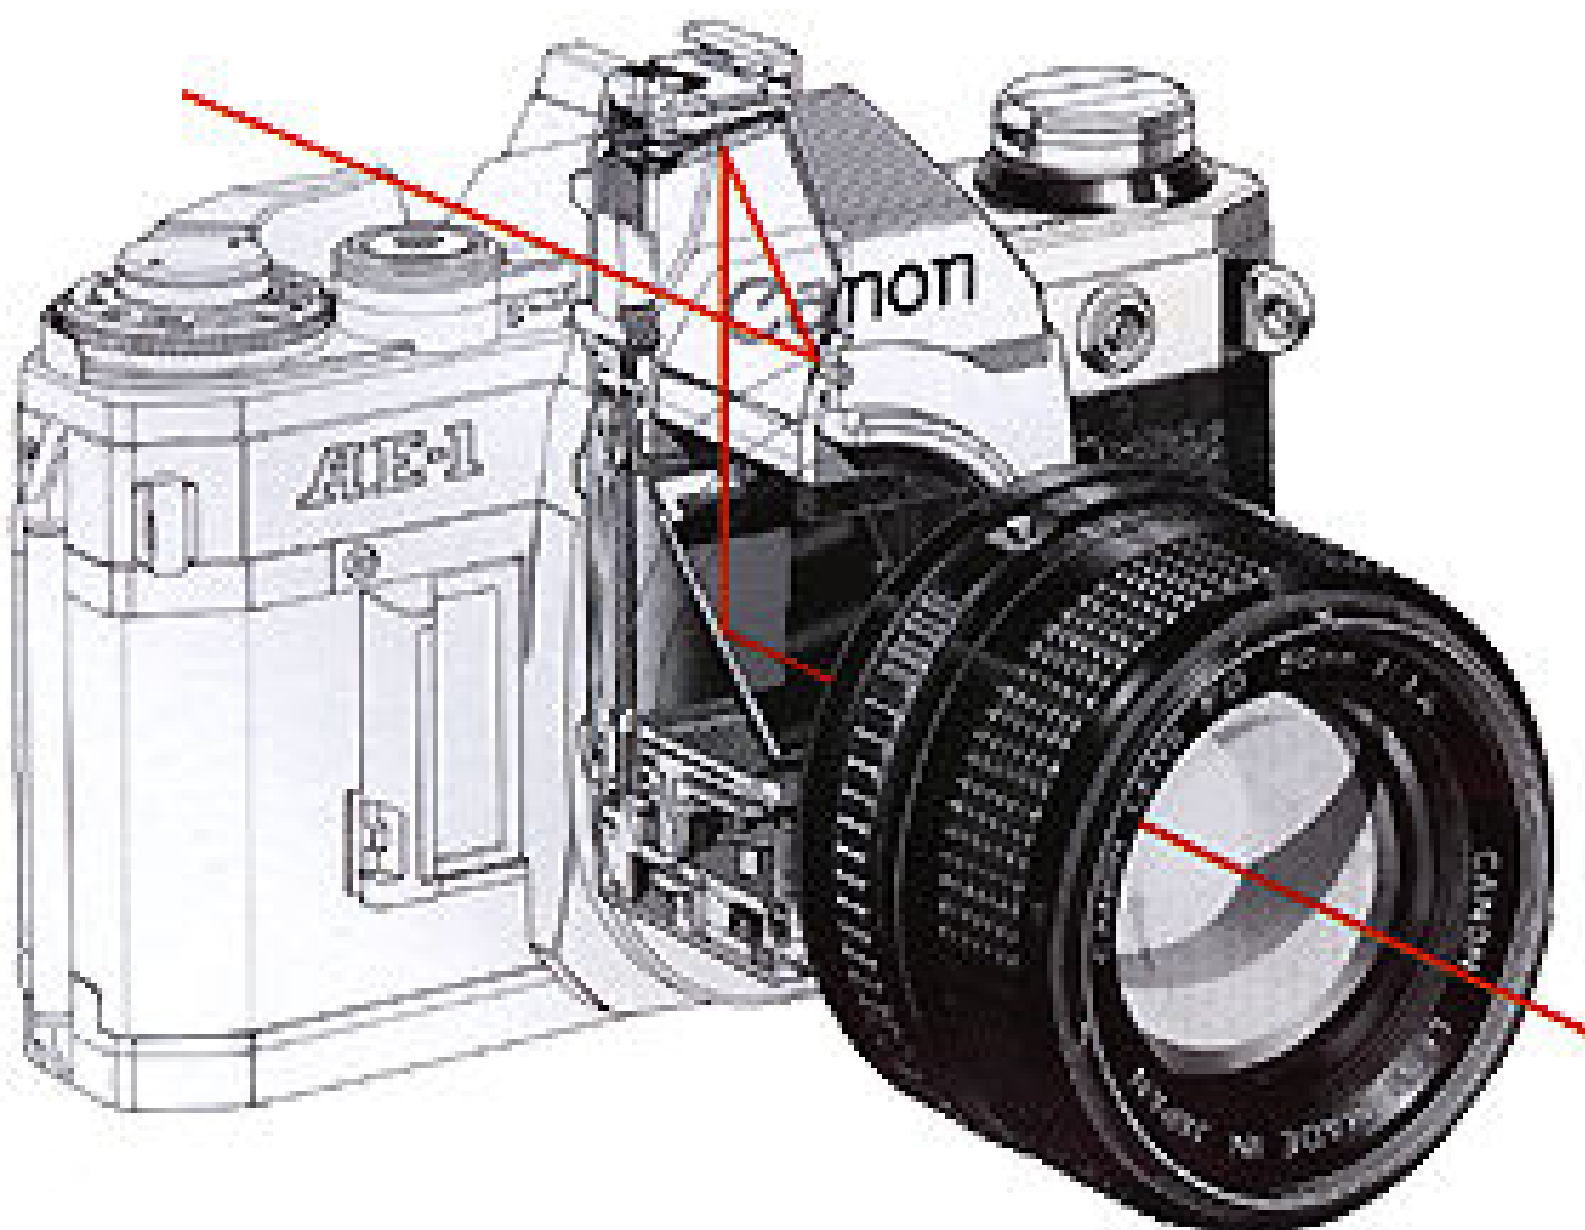


Synchronized shutter speed		1/1000	1/500	1/250	1/60	1/30	1/15	1/8	1/4	1/2	1	2	B
Type													
Flash Bulbs	FP class					△	○	○	○	○	○	○	○
	M and MF class					△	○	○	○	○	○	○	○
Electronic Flash					○	○	○	○	○	○	○	○	○

(△ mark indicates possible unevenness in the picture depending on the flash bulb.)



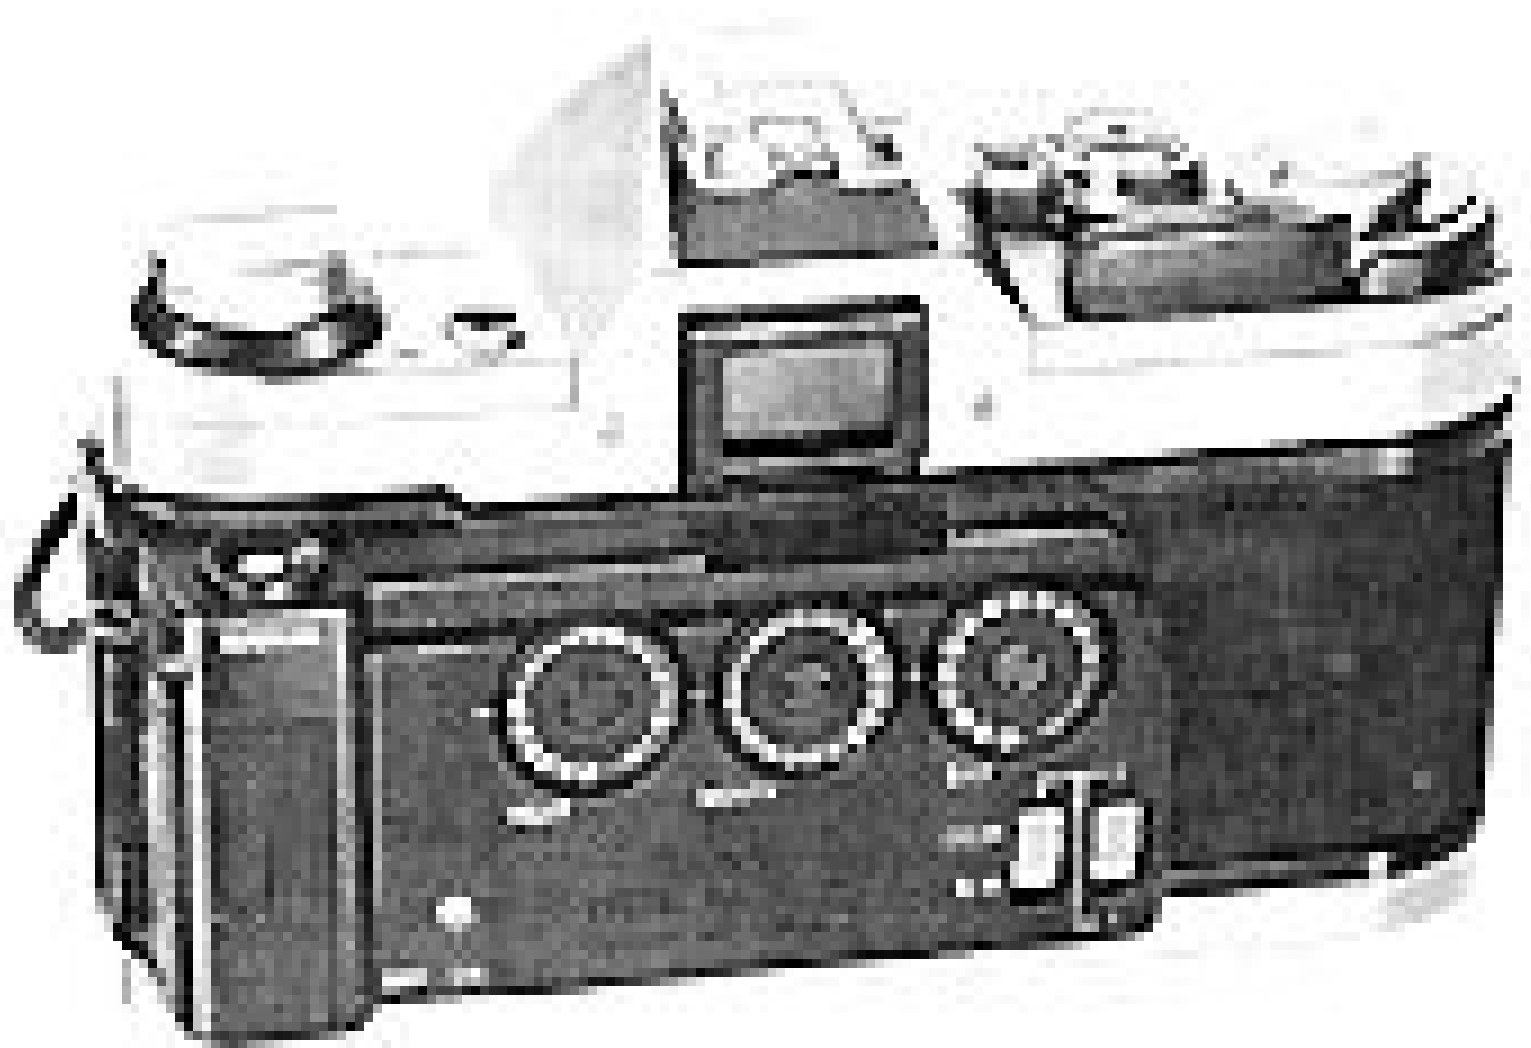




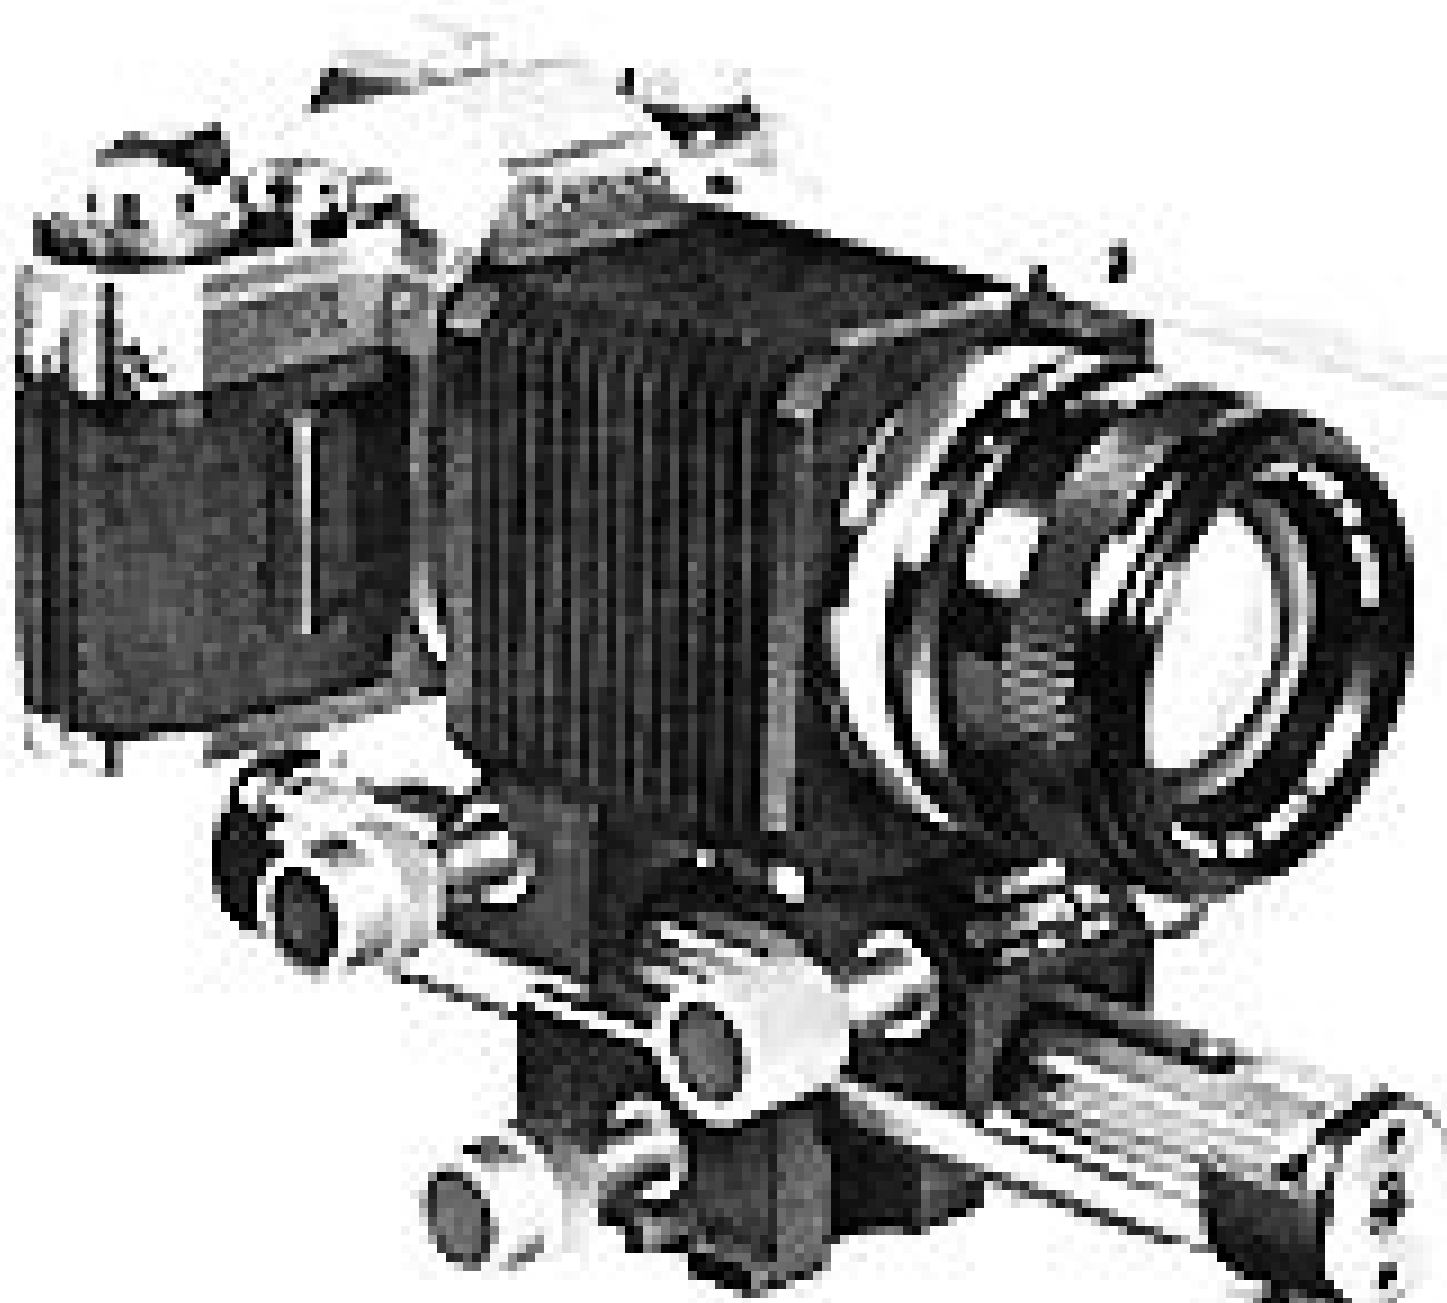





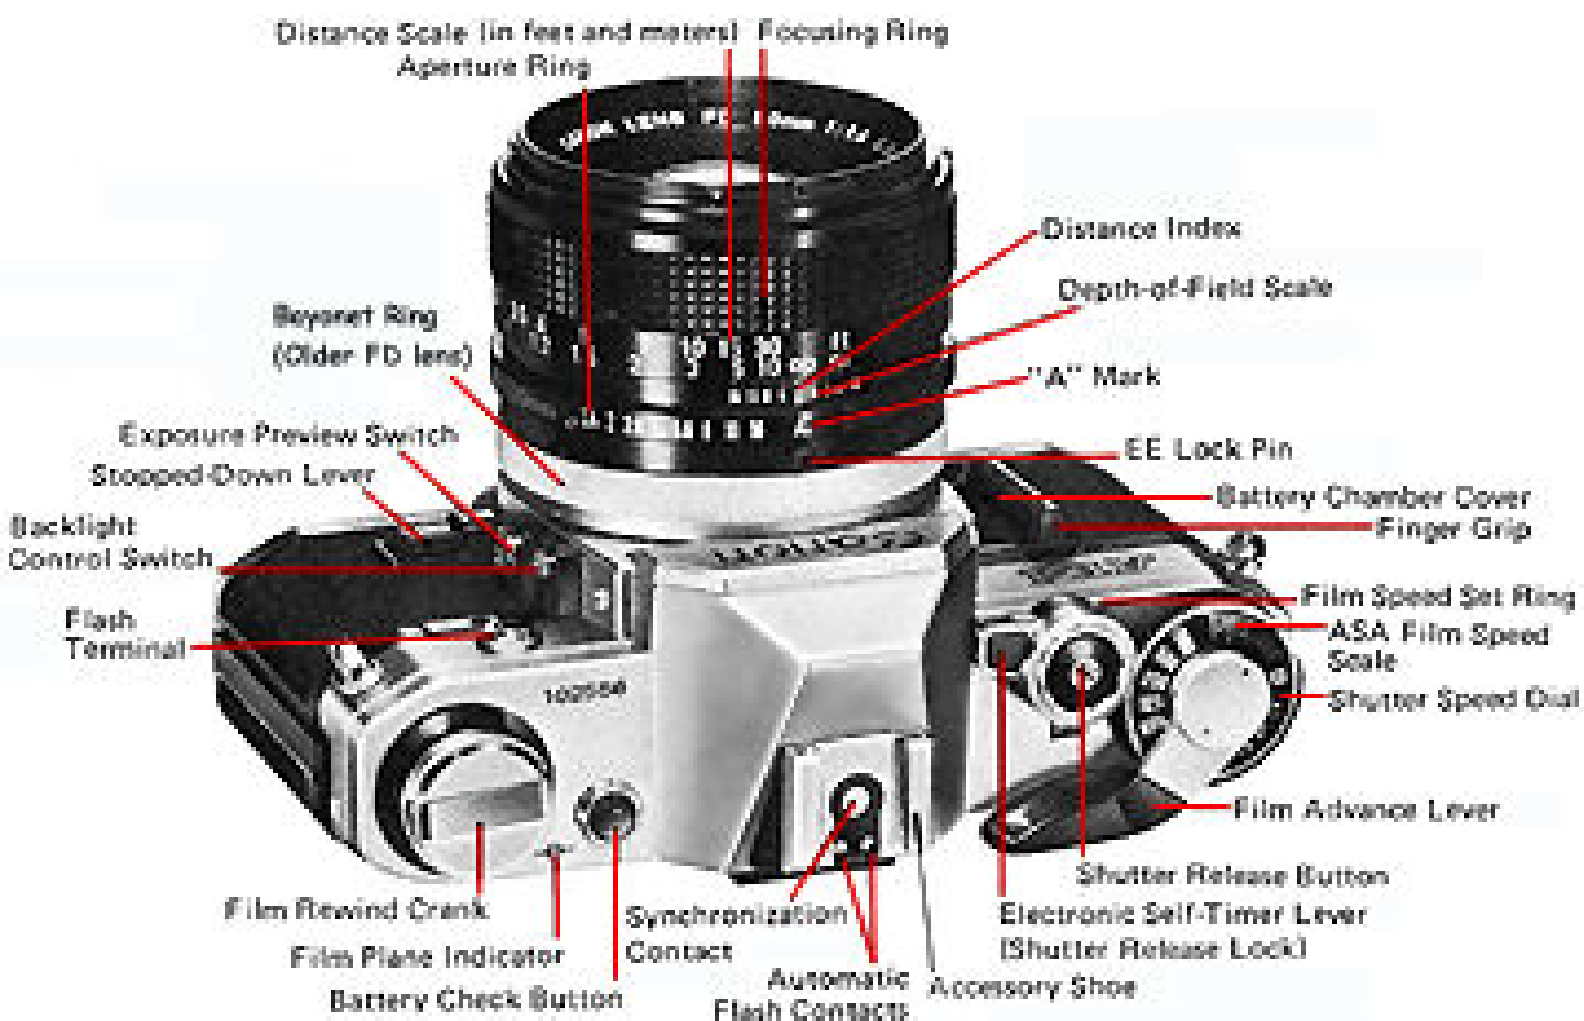



Turn lens locking ring
counterclockwise to
remove lens
(Older FD lenses)

Diaphragm setting
ring at auto setting

Hot Shoe
Sync Contact

Aperture Ring
Lock Button

Self Timer
LED

Self Timer Lever
(With release
button Lock)

Film
Plane
Indicator
(42.14mm)


Battery Test
Button


Contact for
Aperture Signal

Contact for
Shutter Speed
Signal

Frame Counter
(reverse as rewinding)

Film Speed
Dial

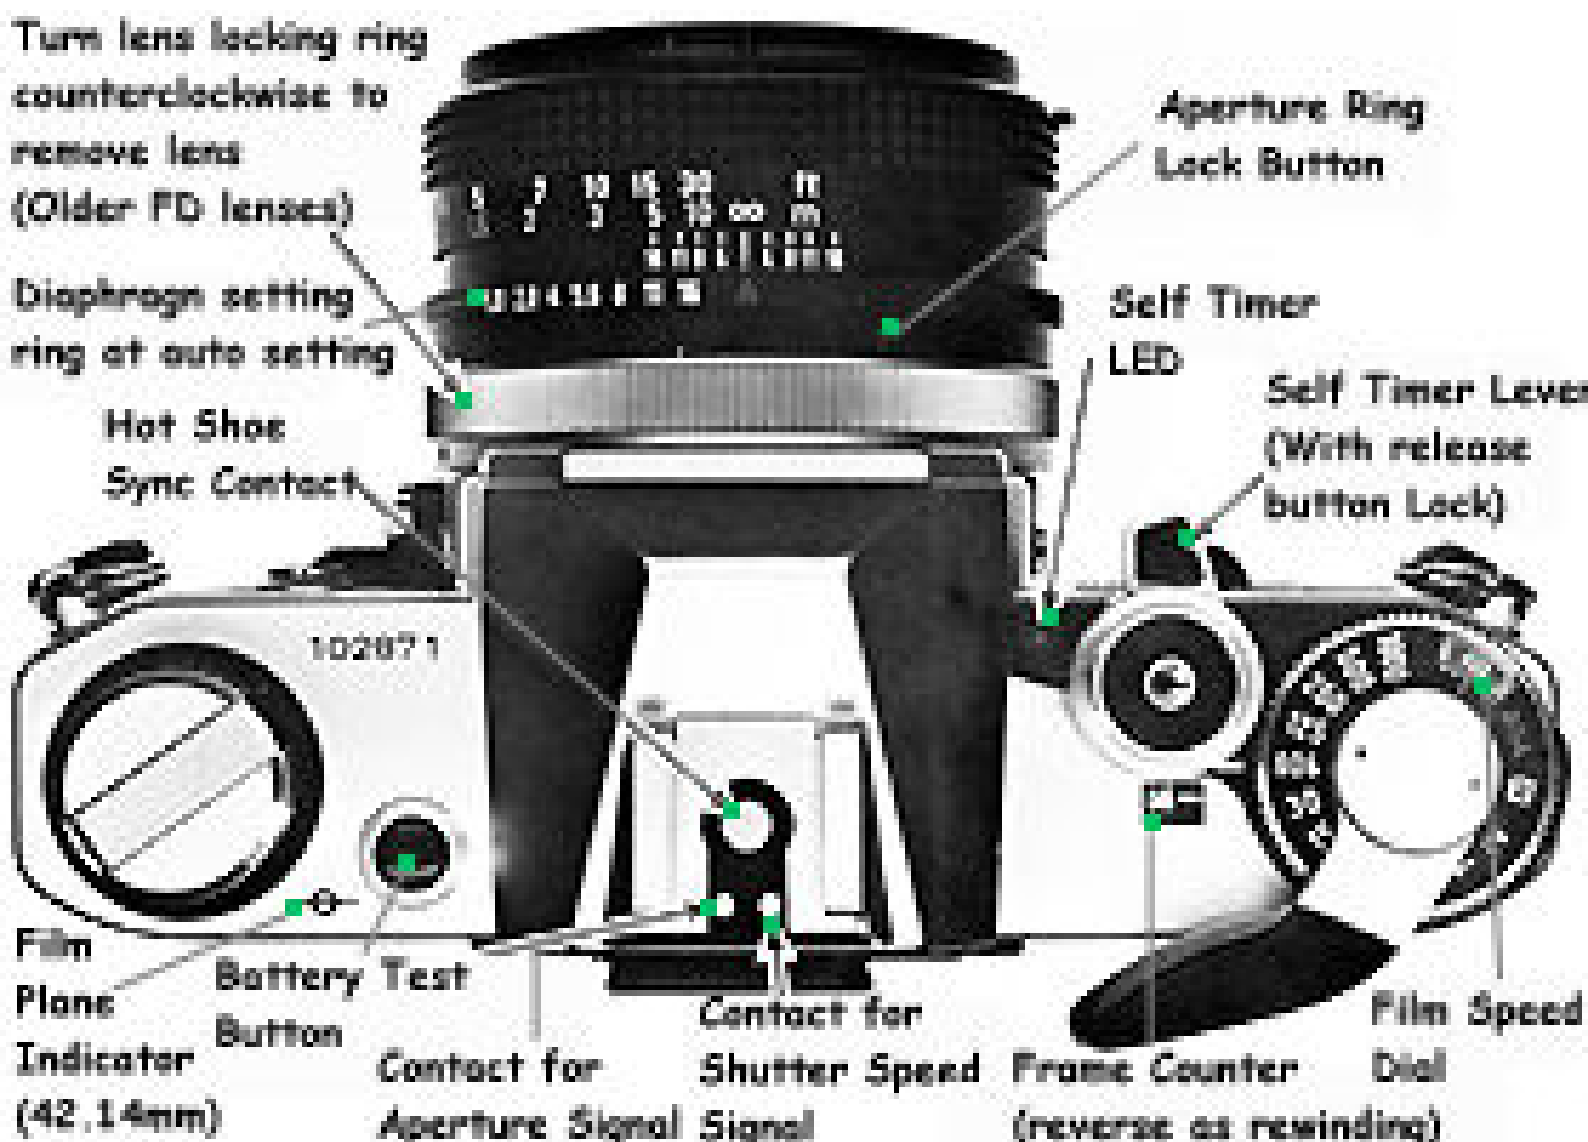

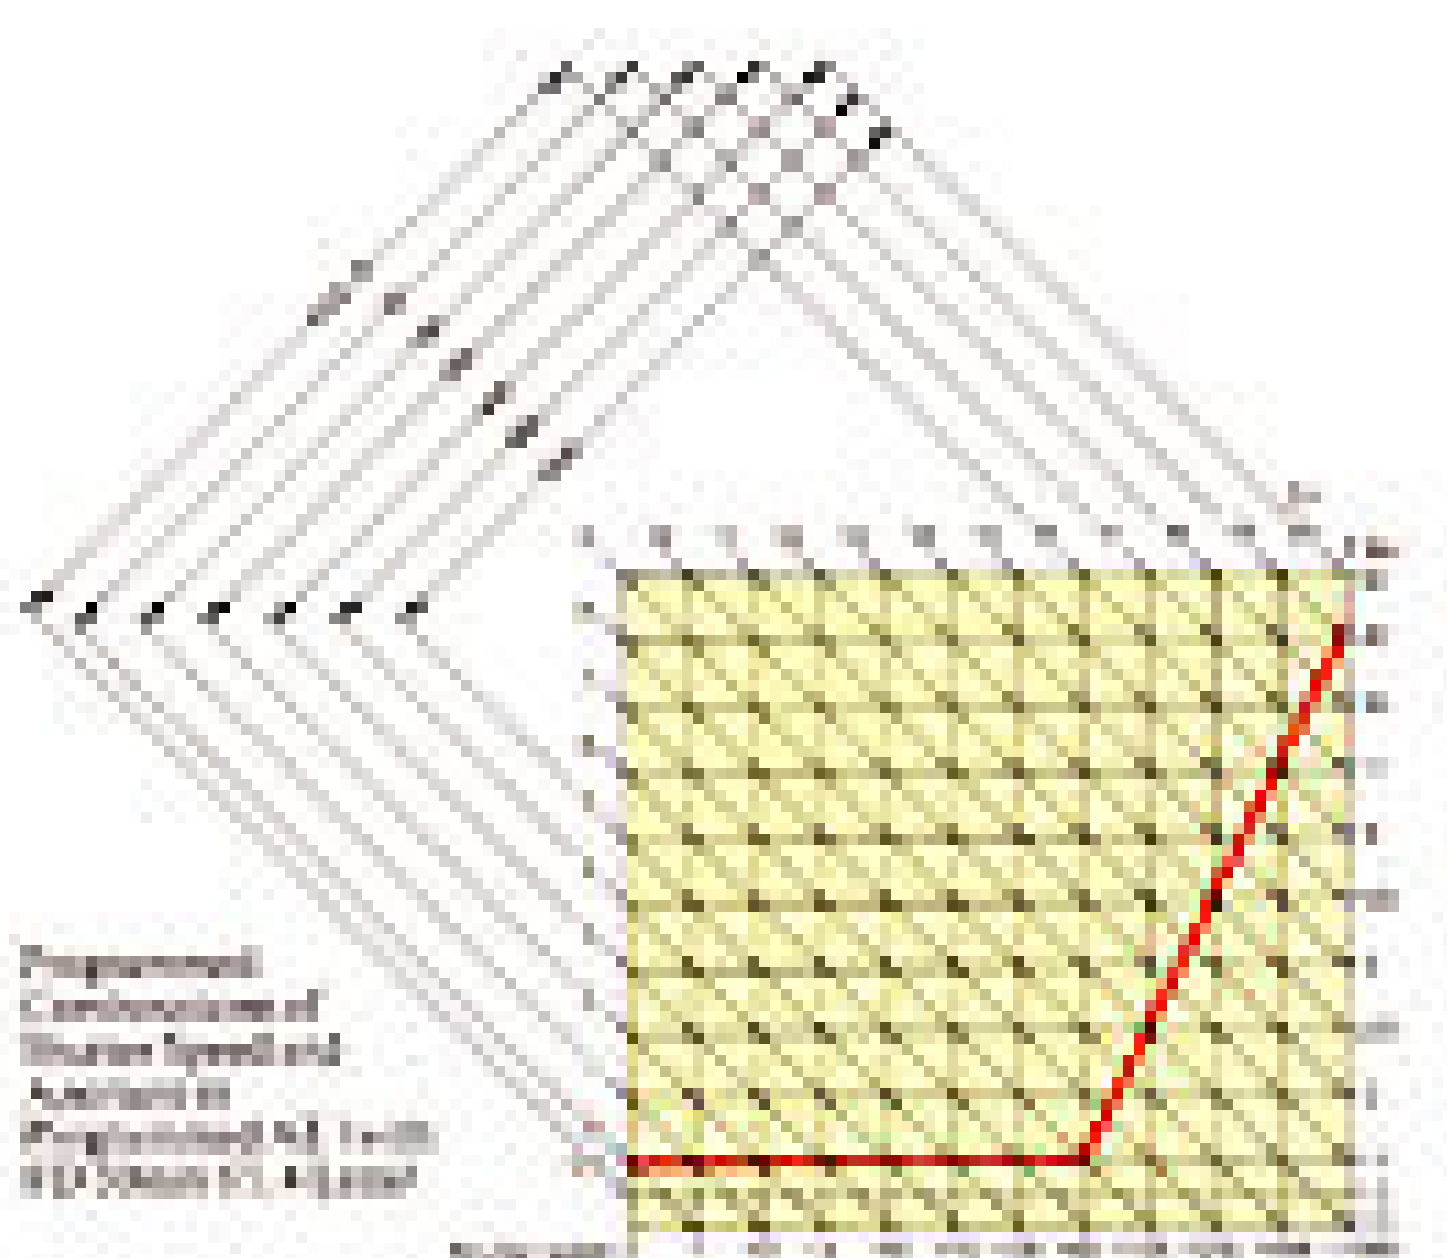


Programmed Acceleration and Velocity (m/s) and Acceleration (m/s²) vs. Programmed Velocity (m/s) and Acceleration (m/s²)







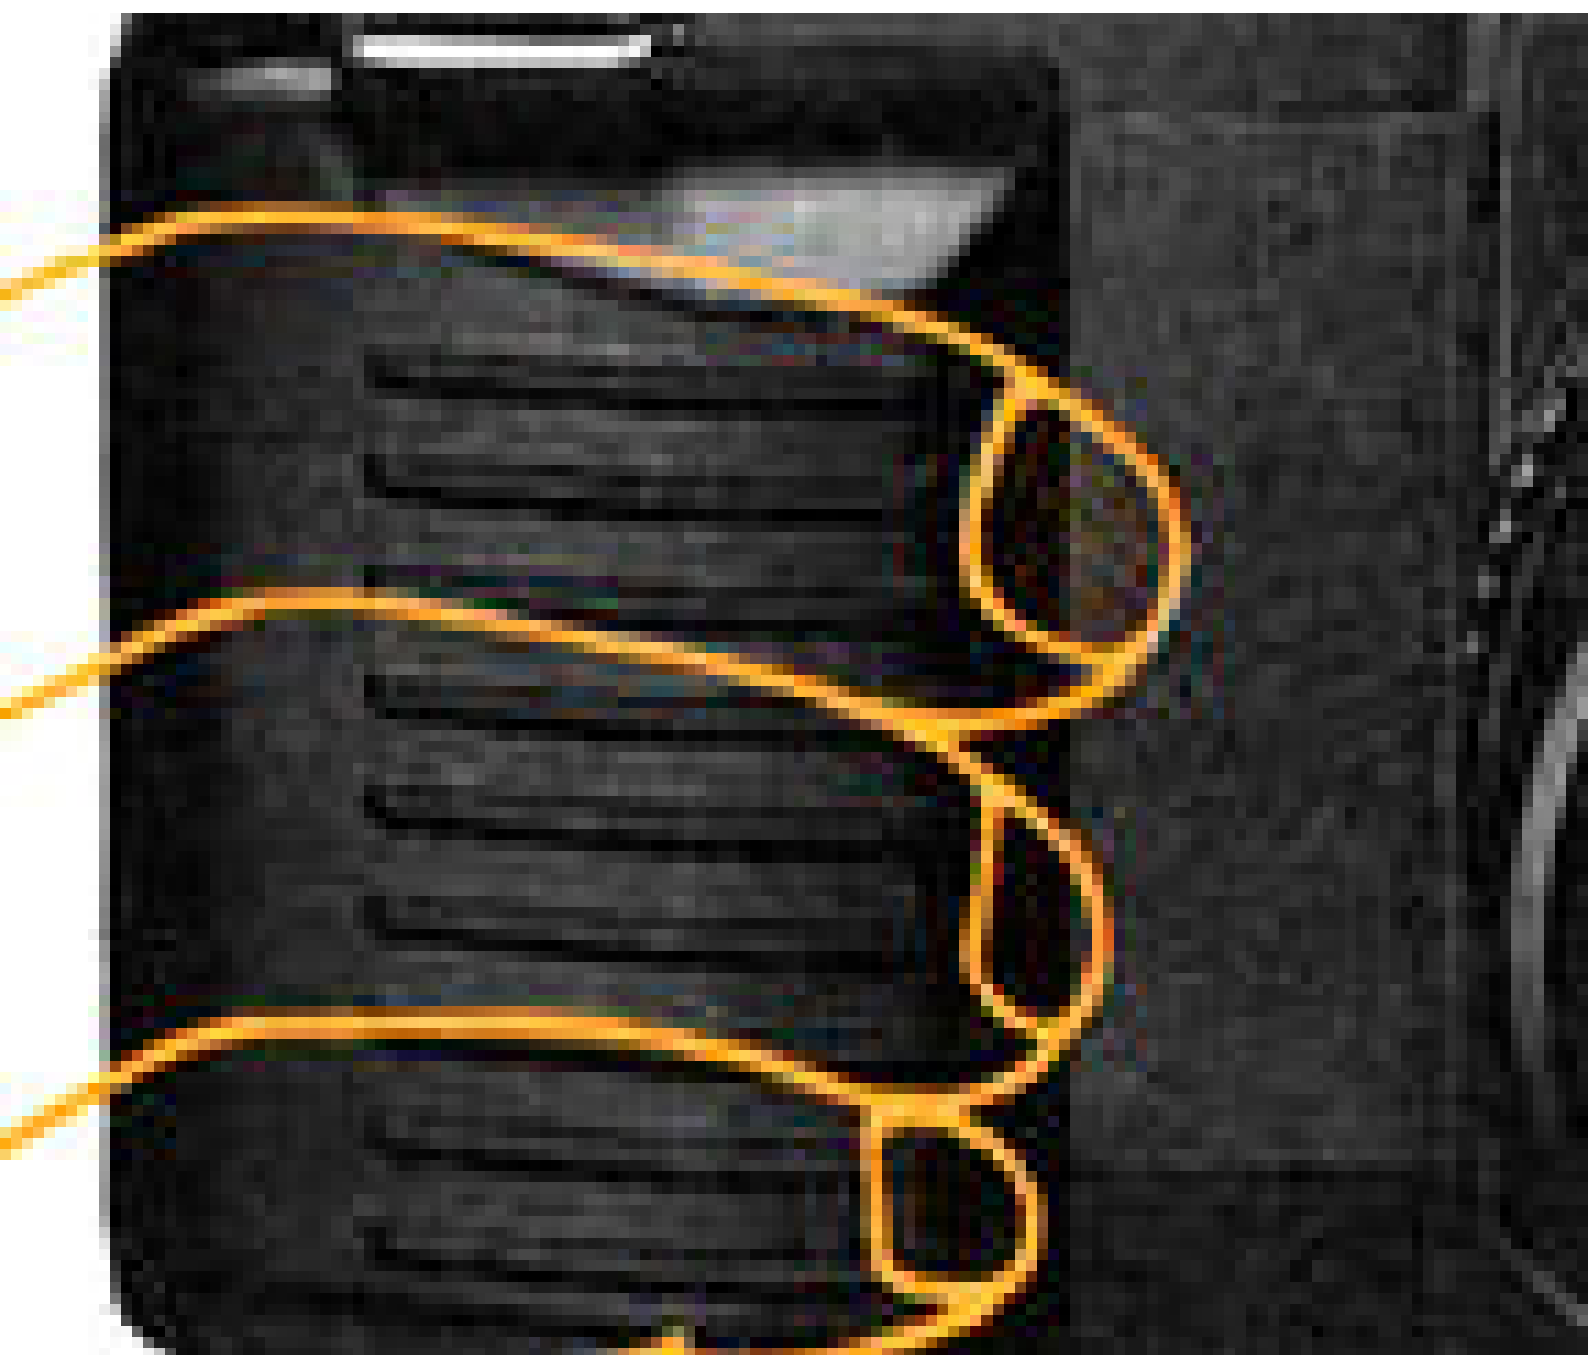

























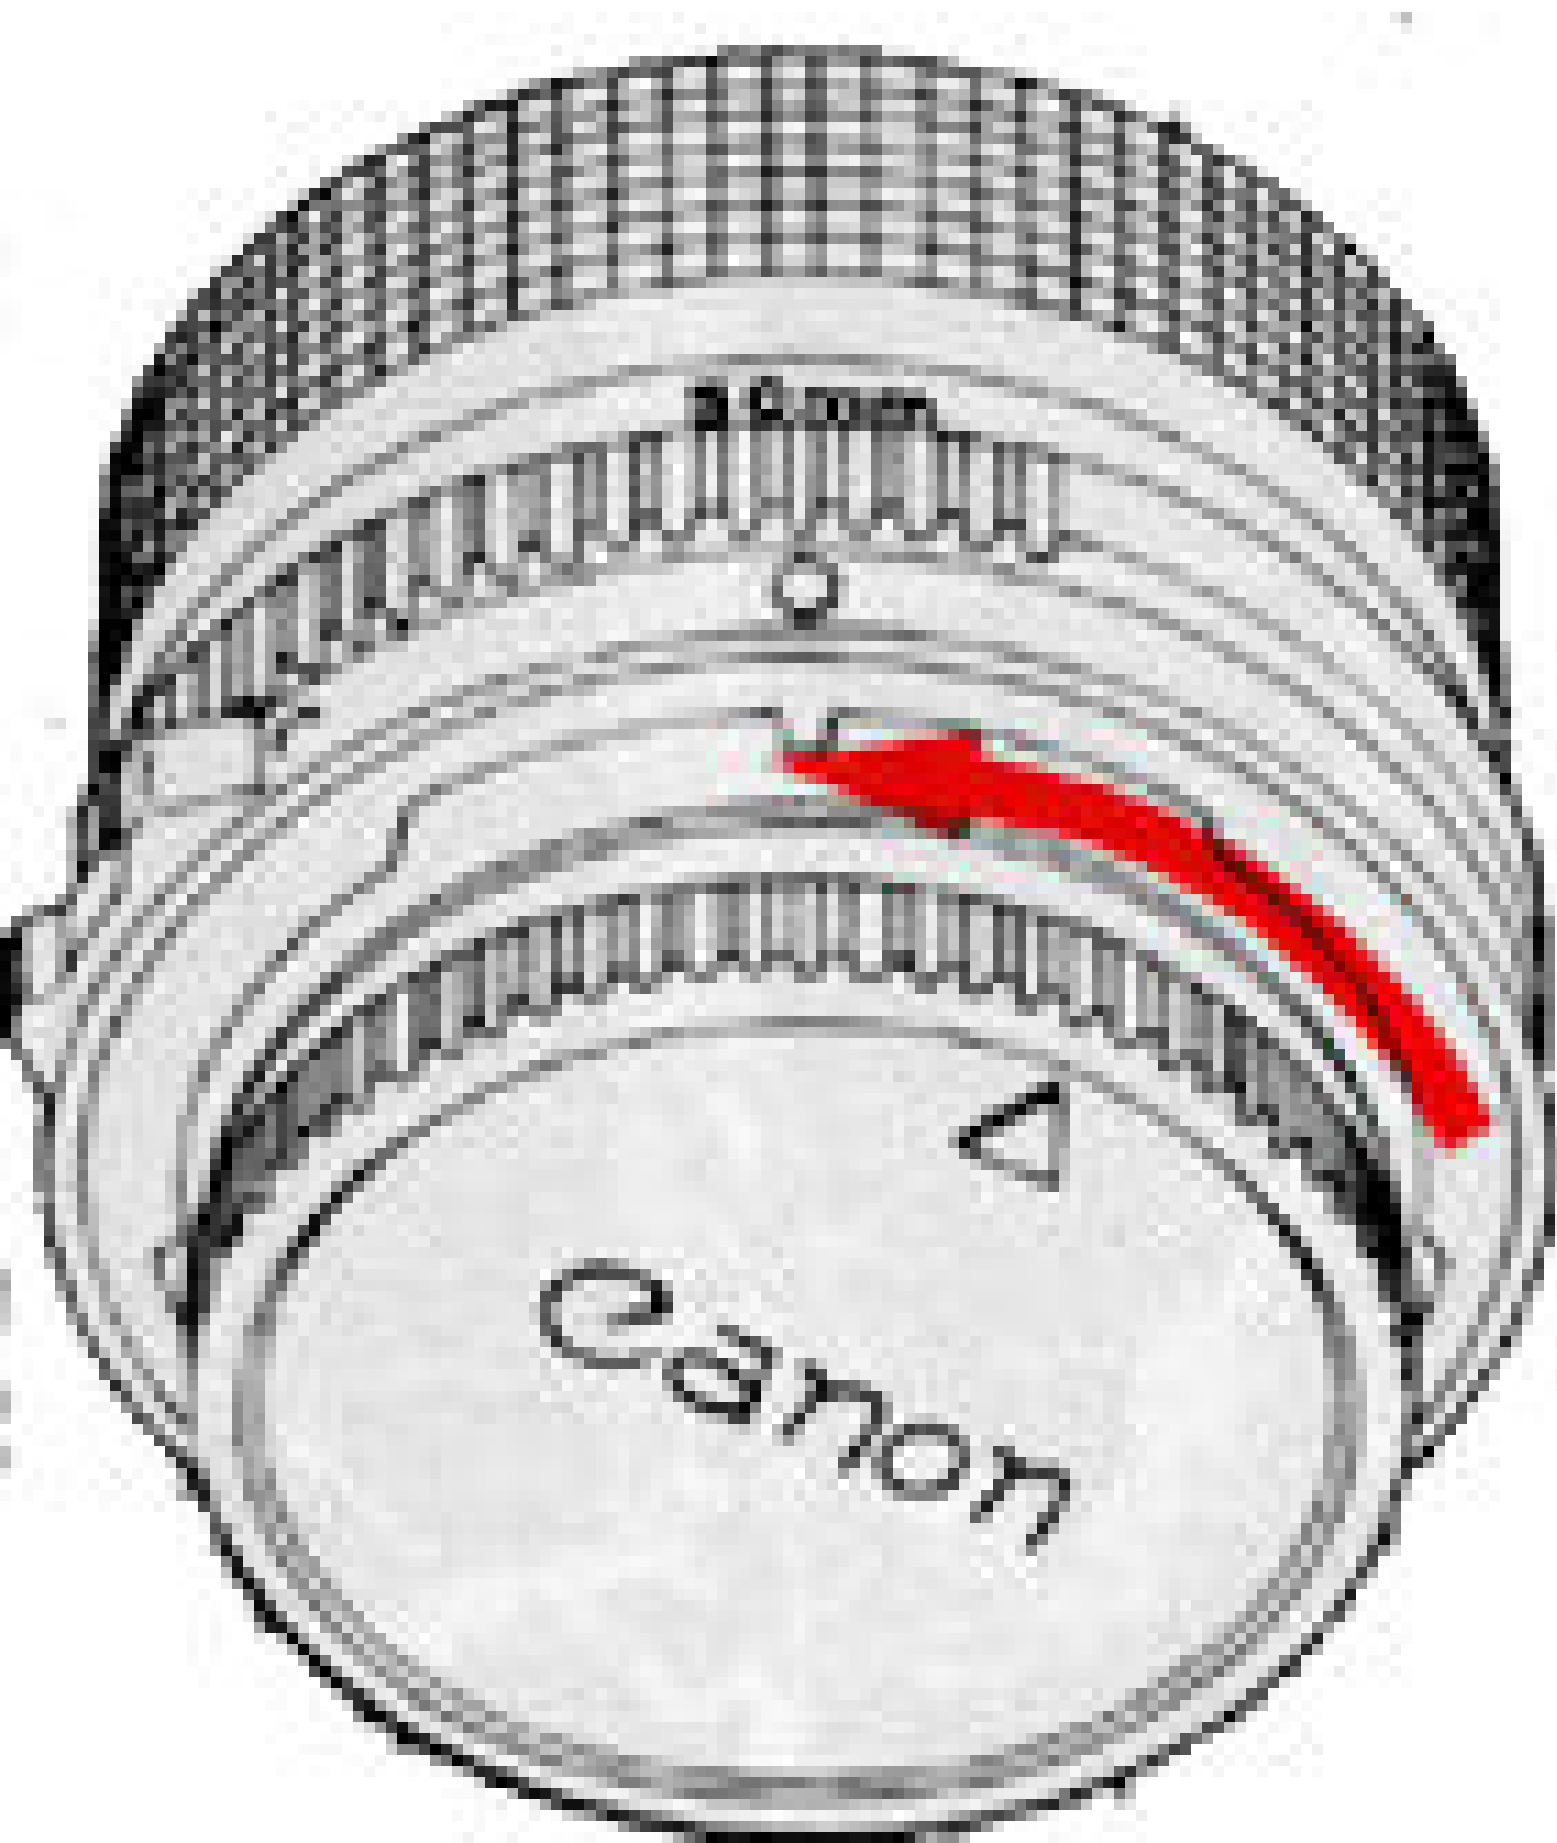




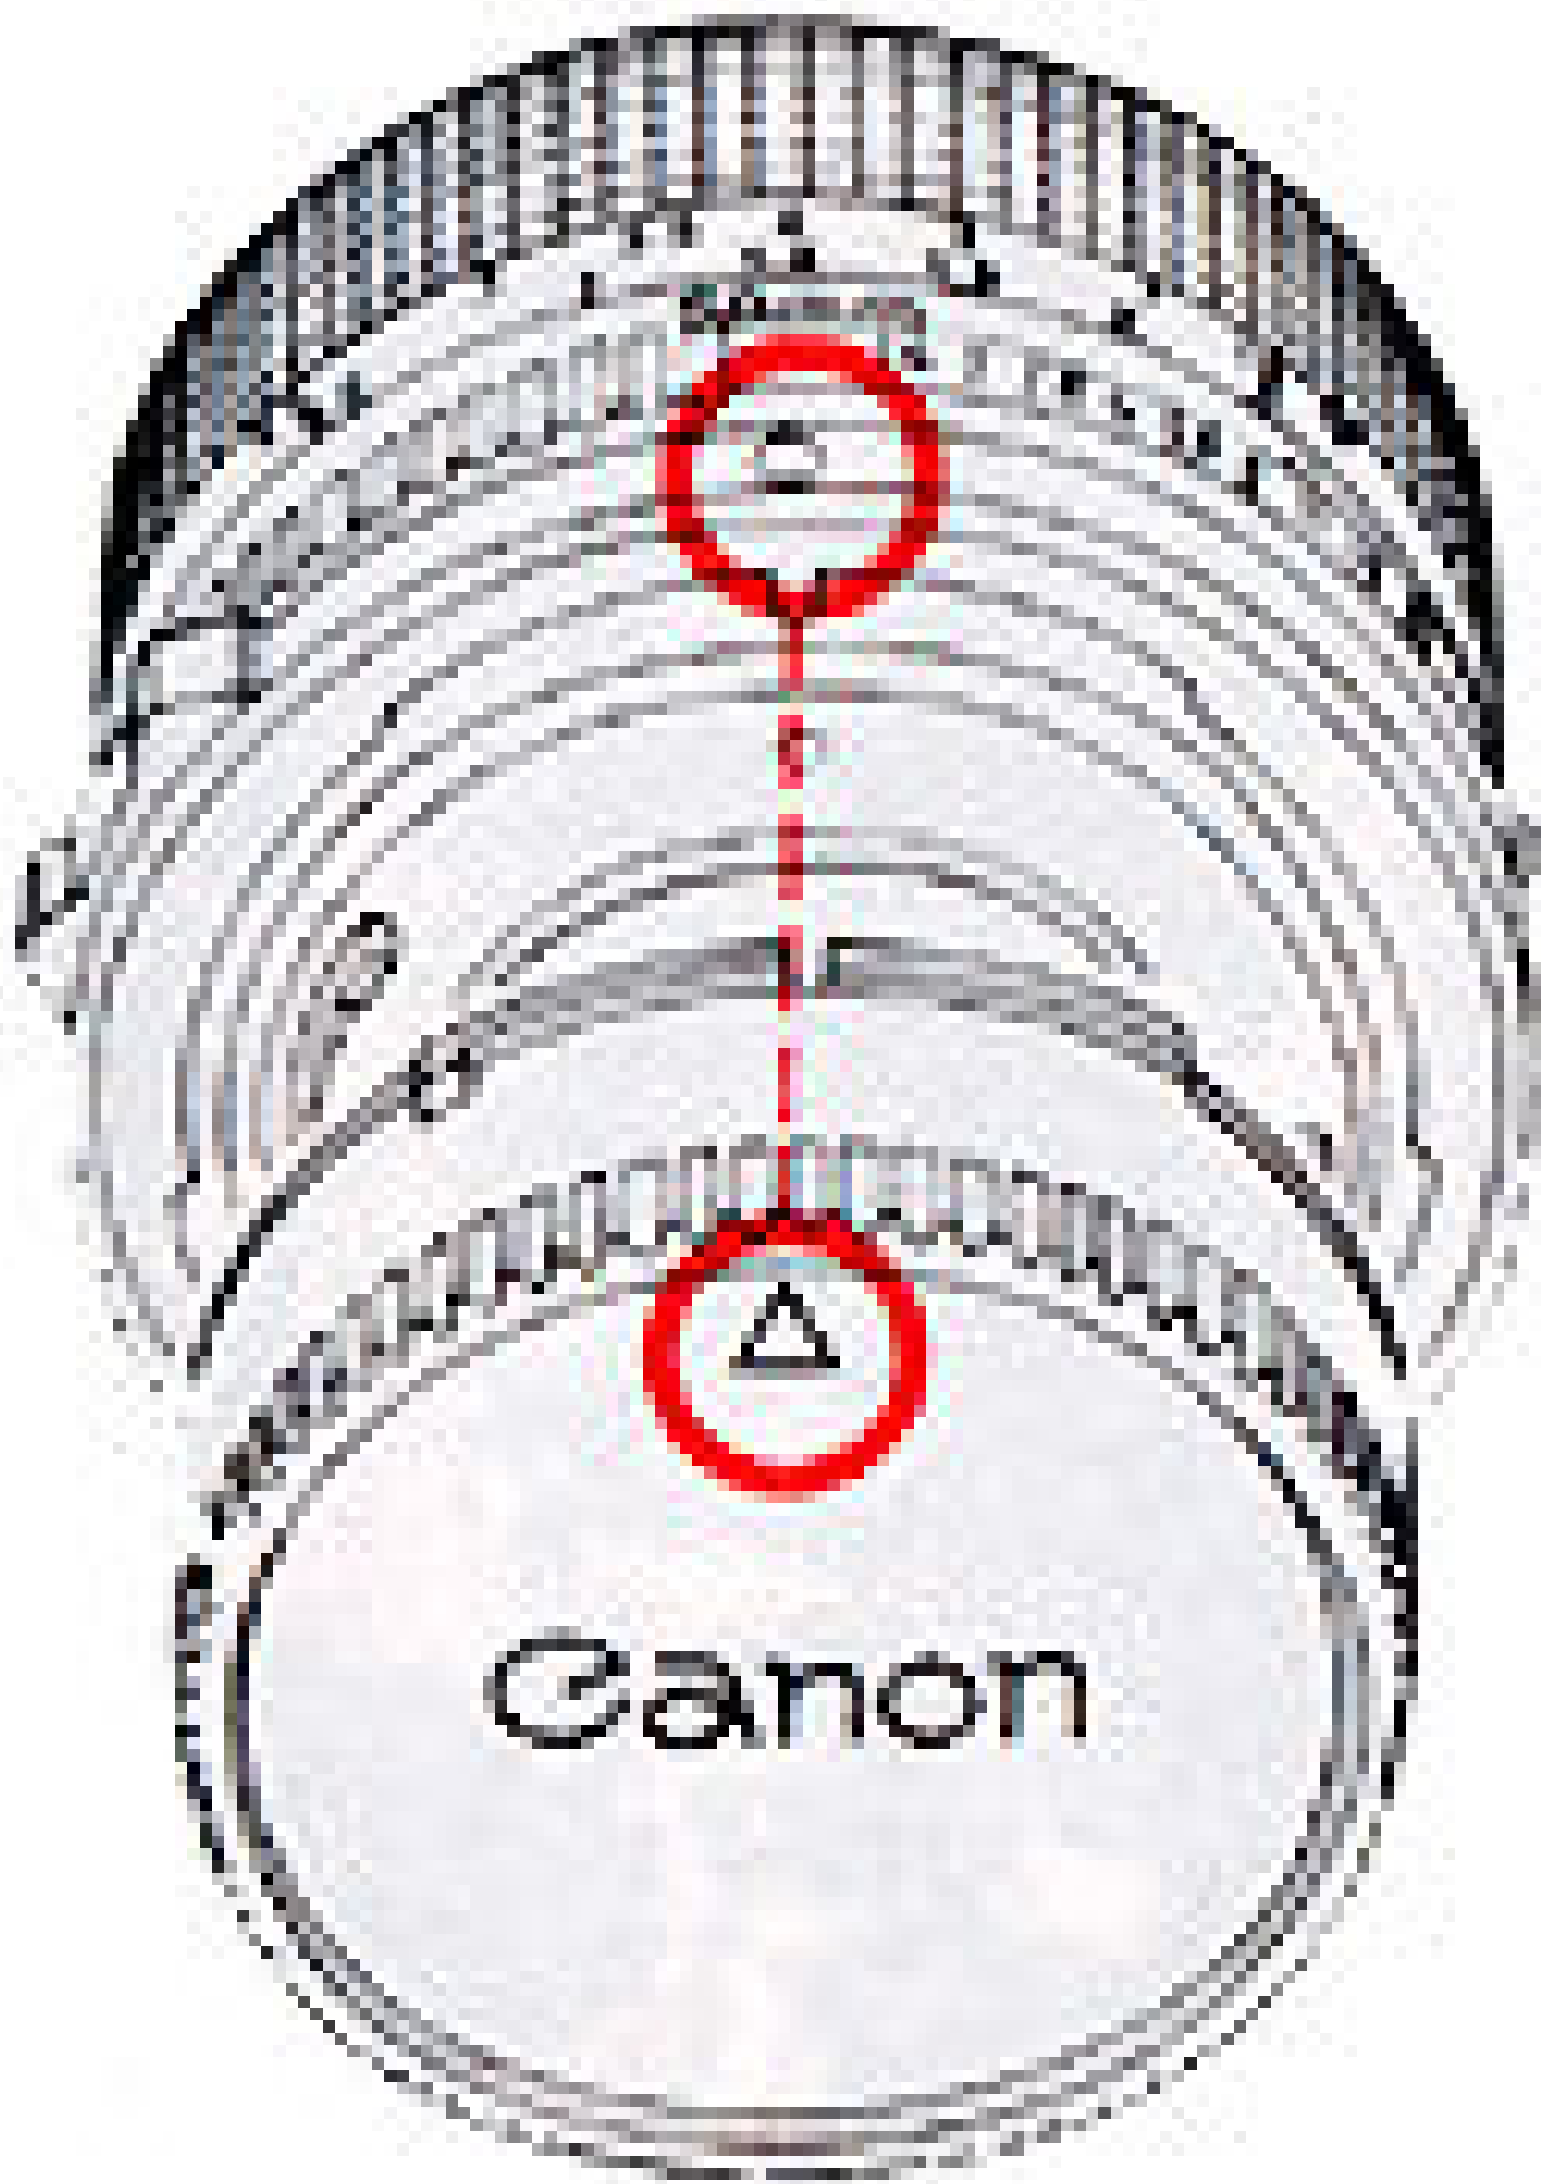


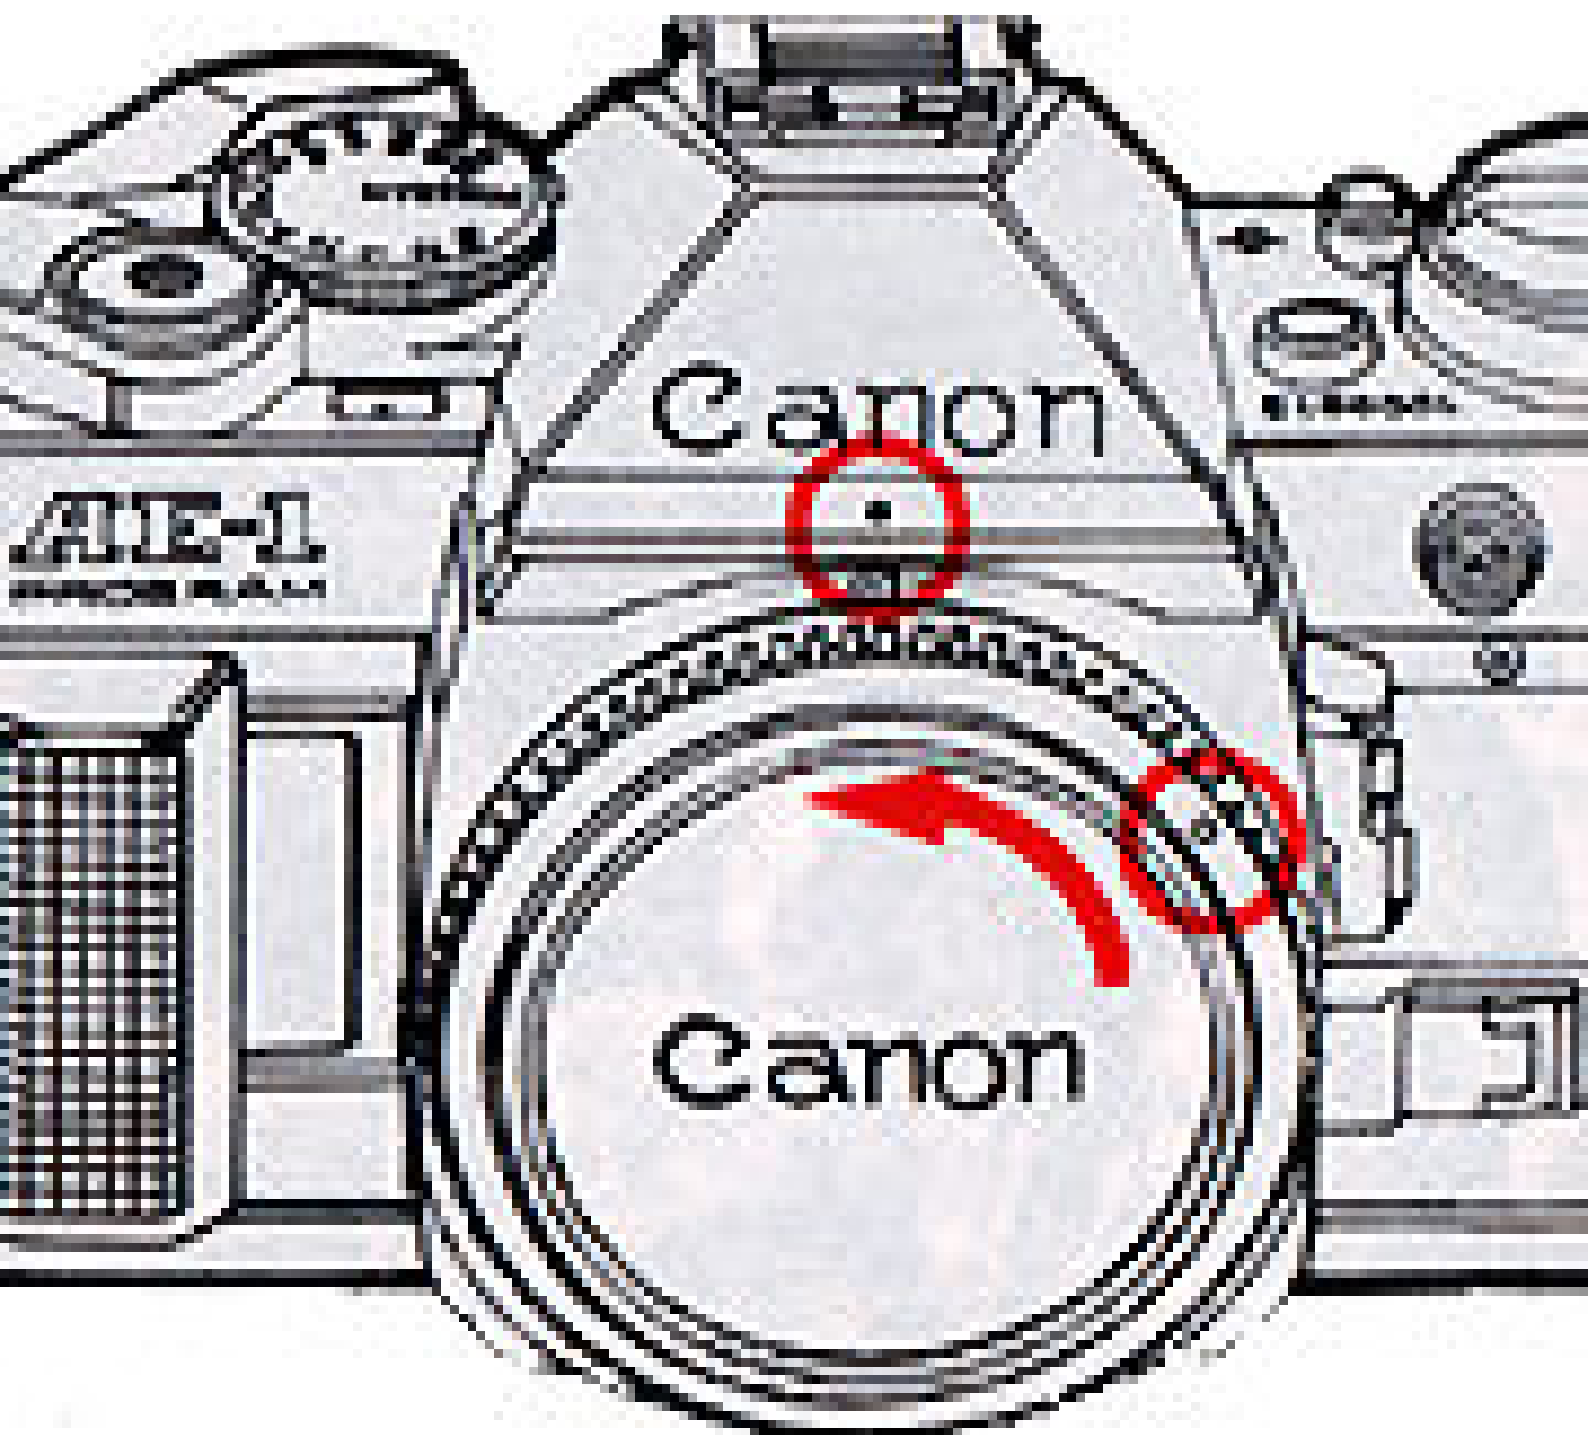


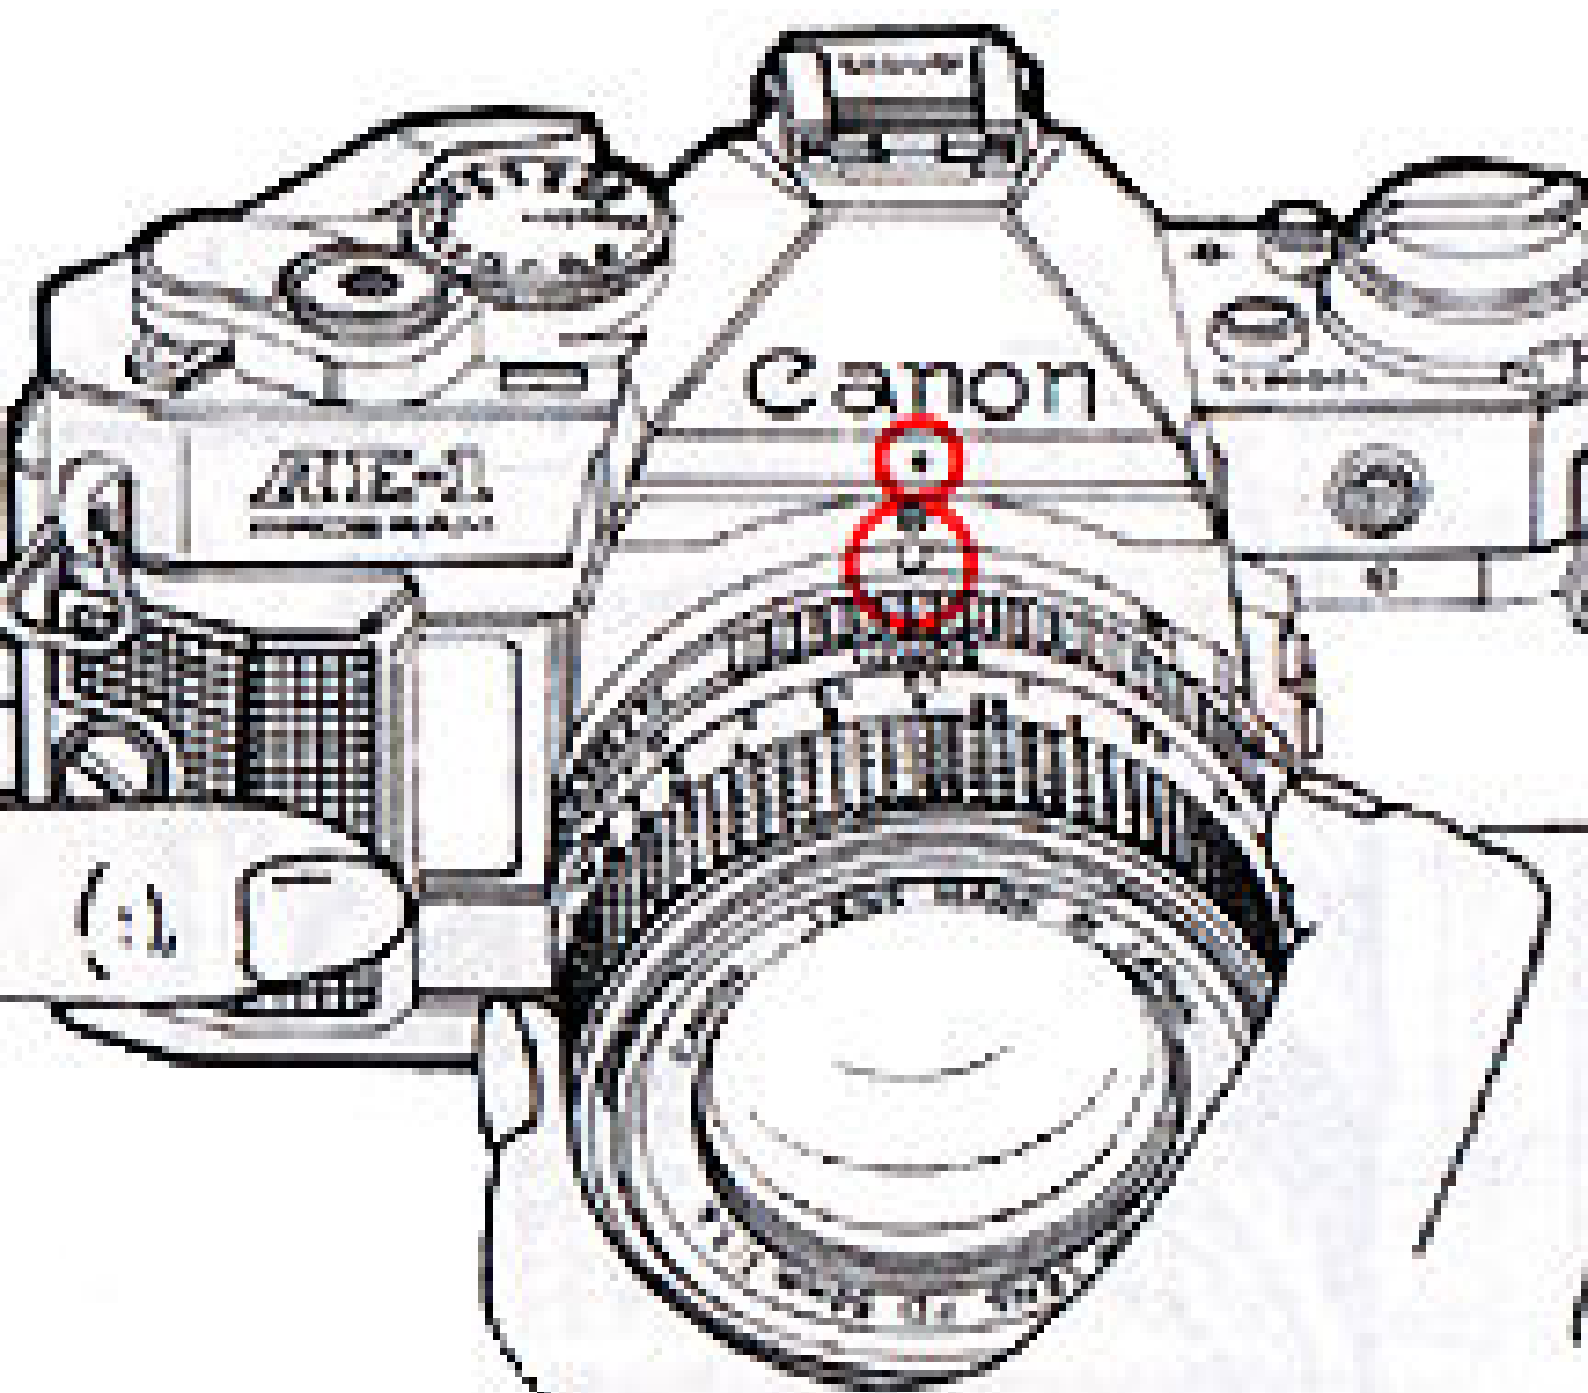


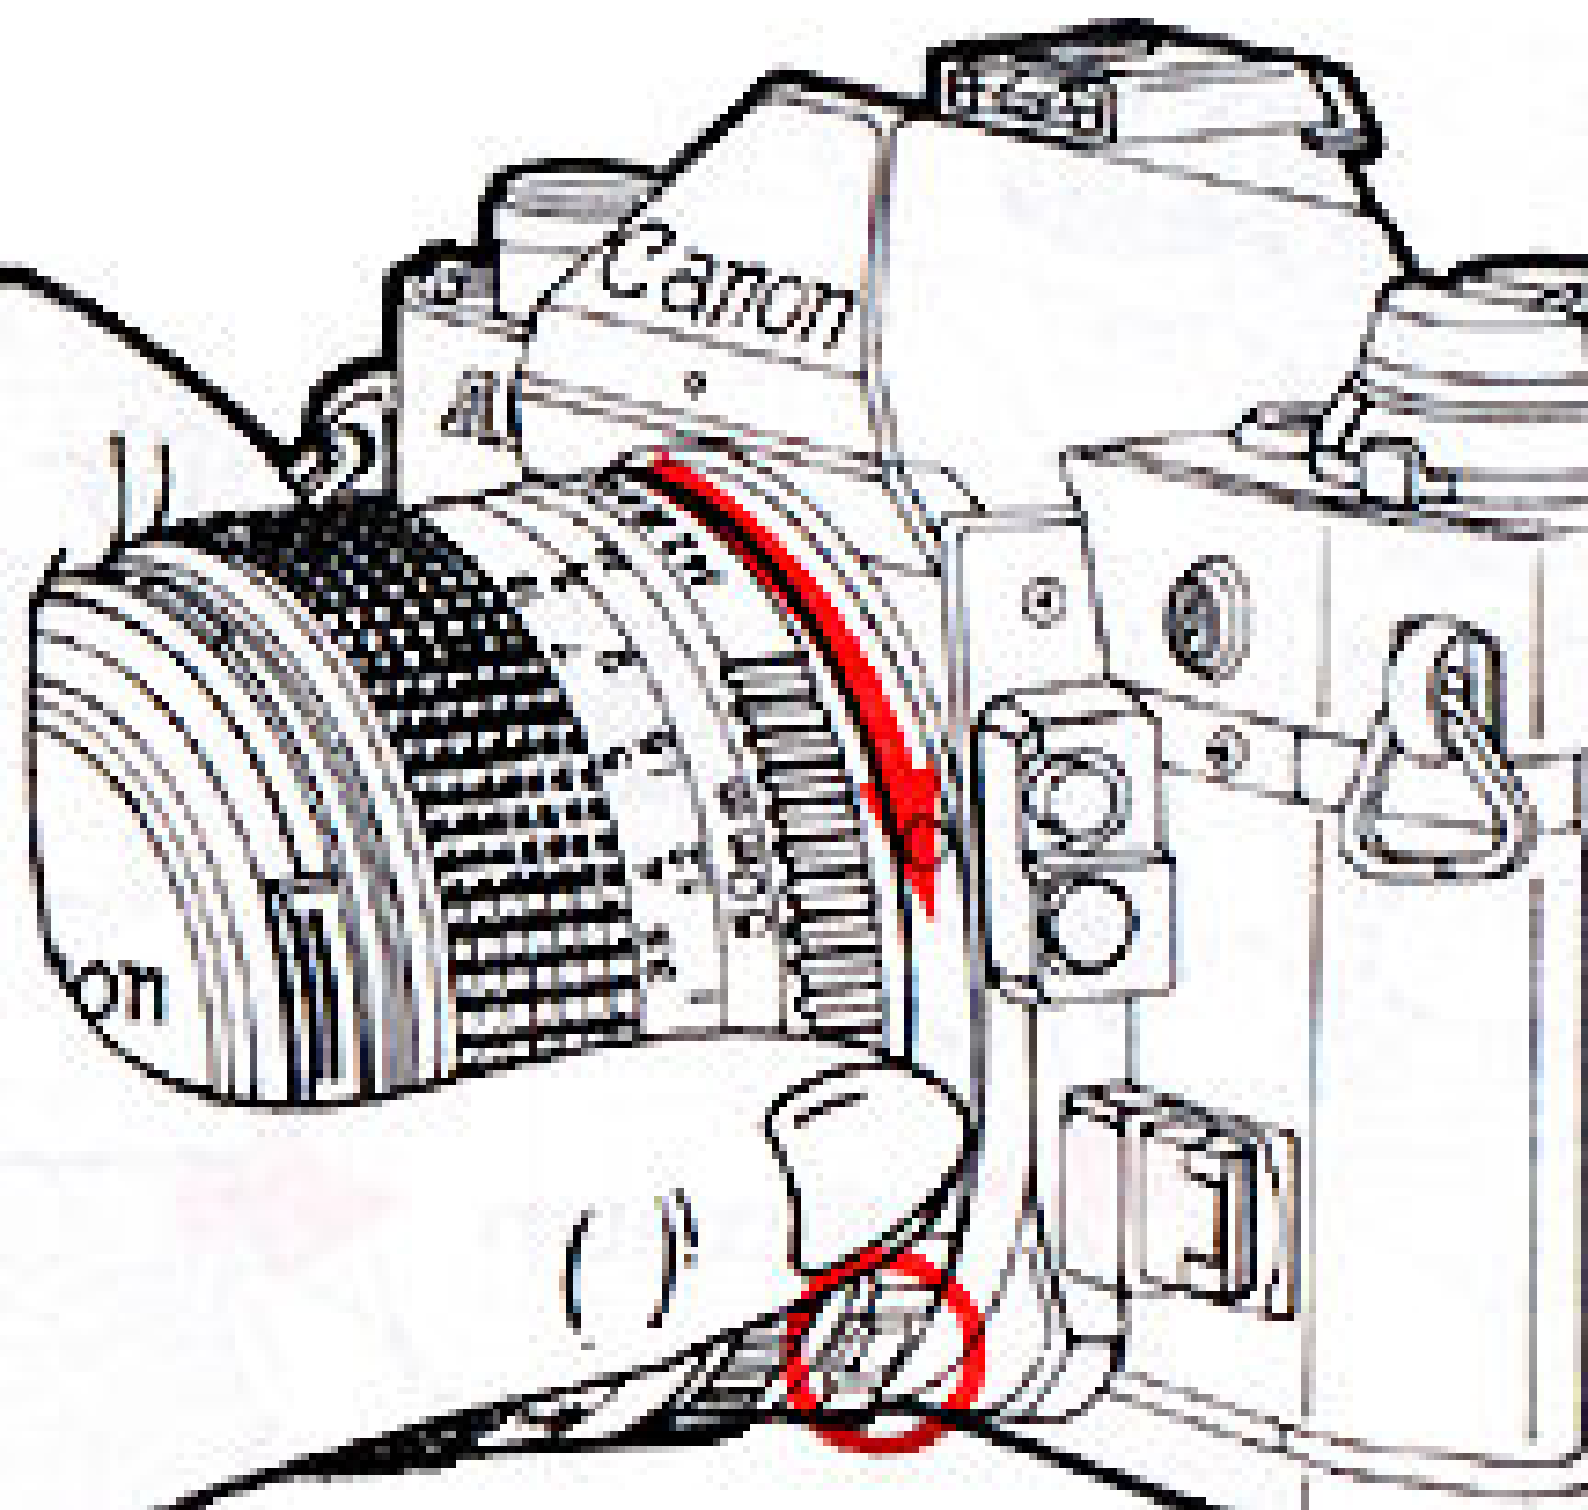




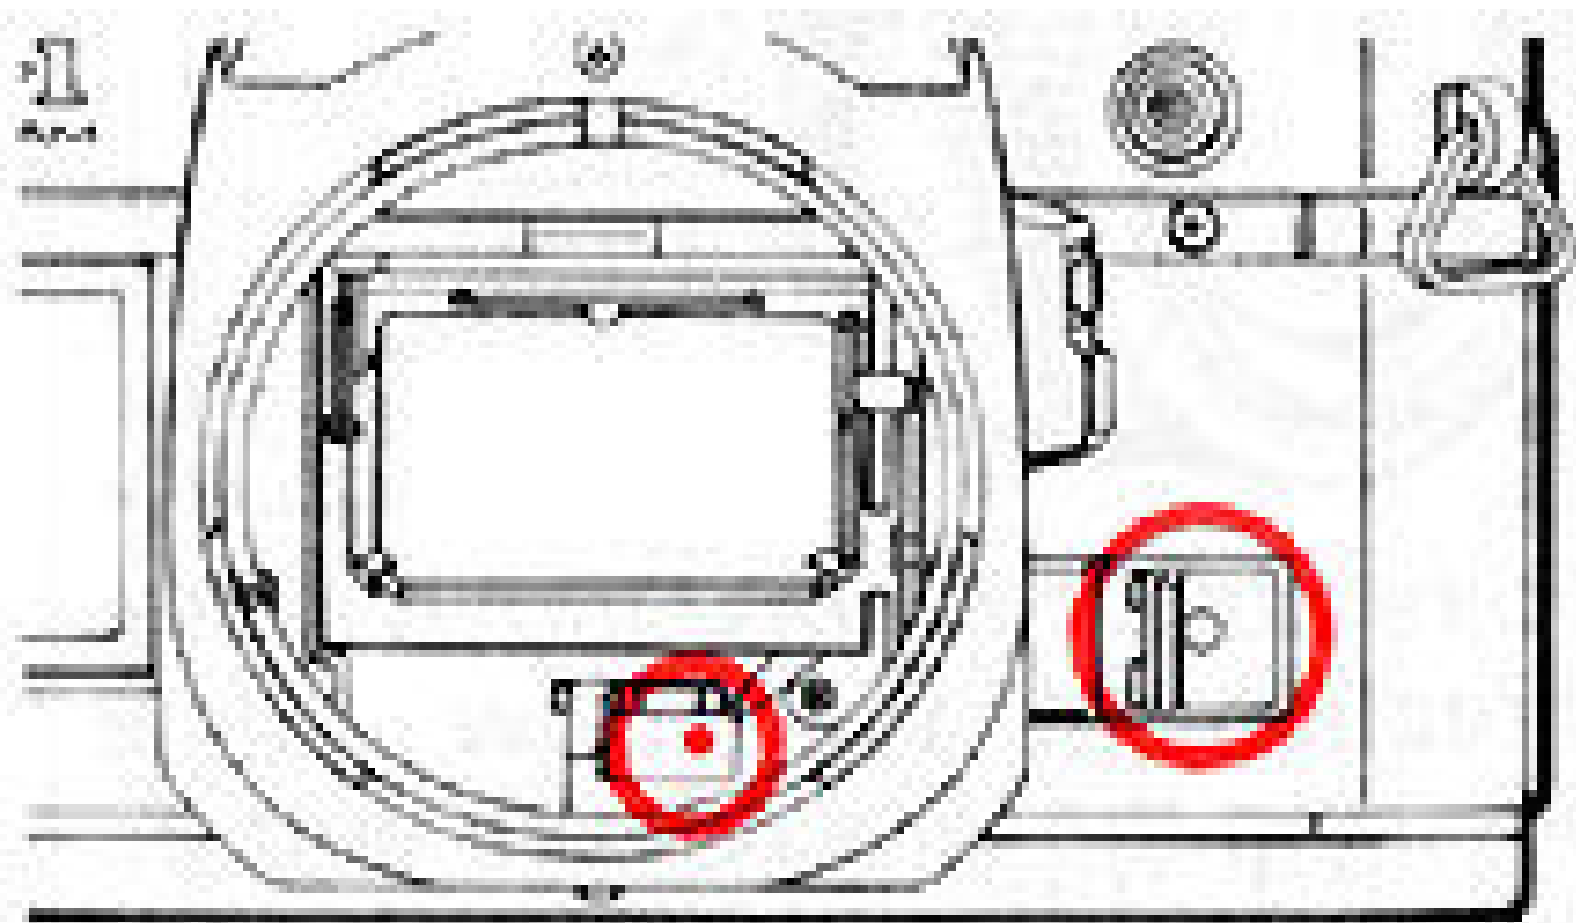

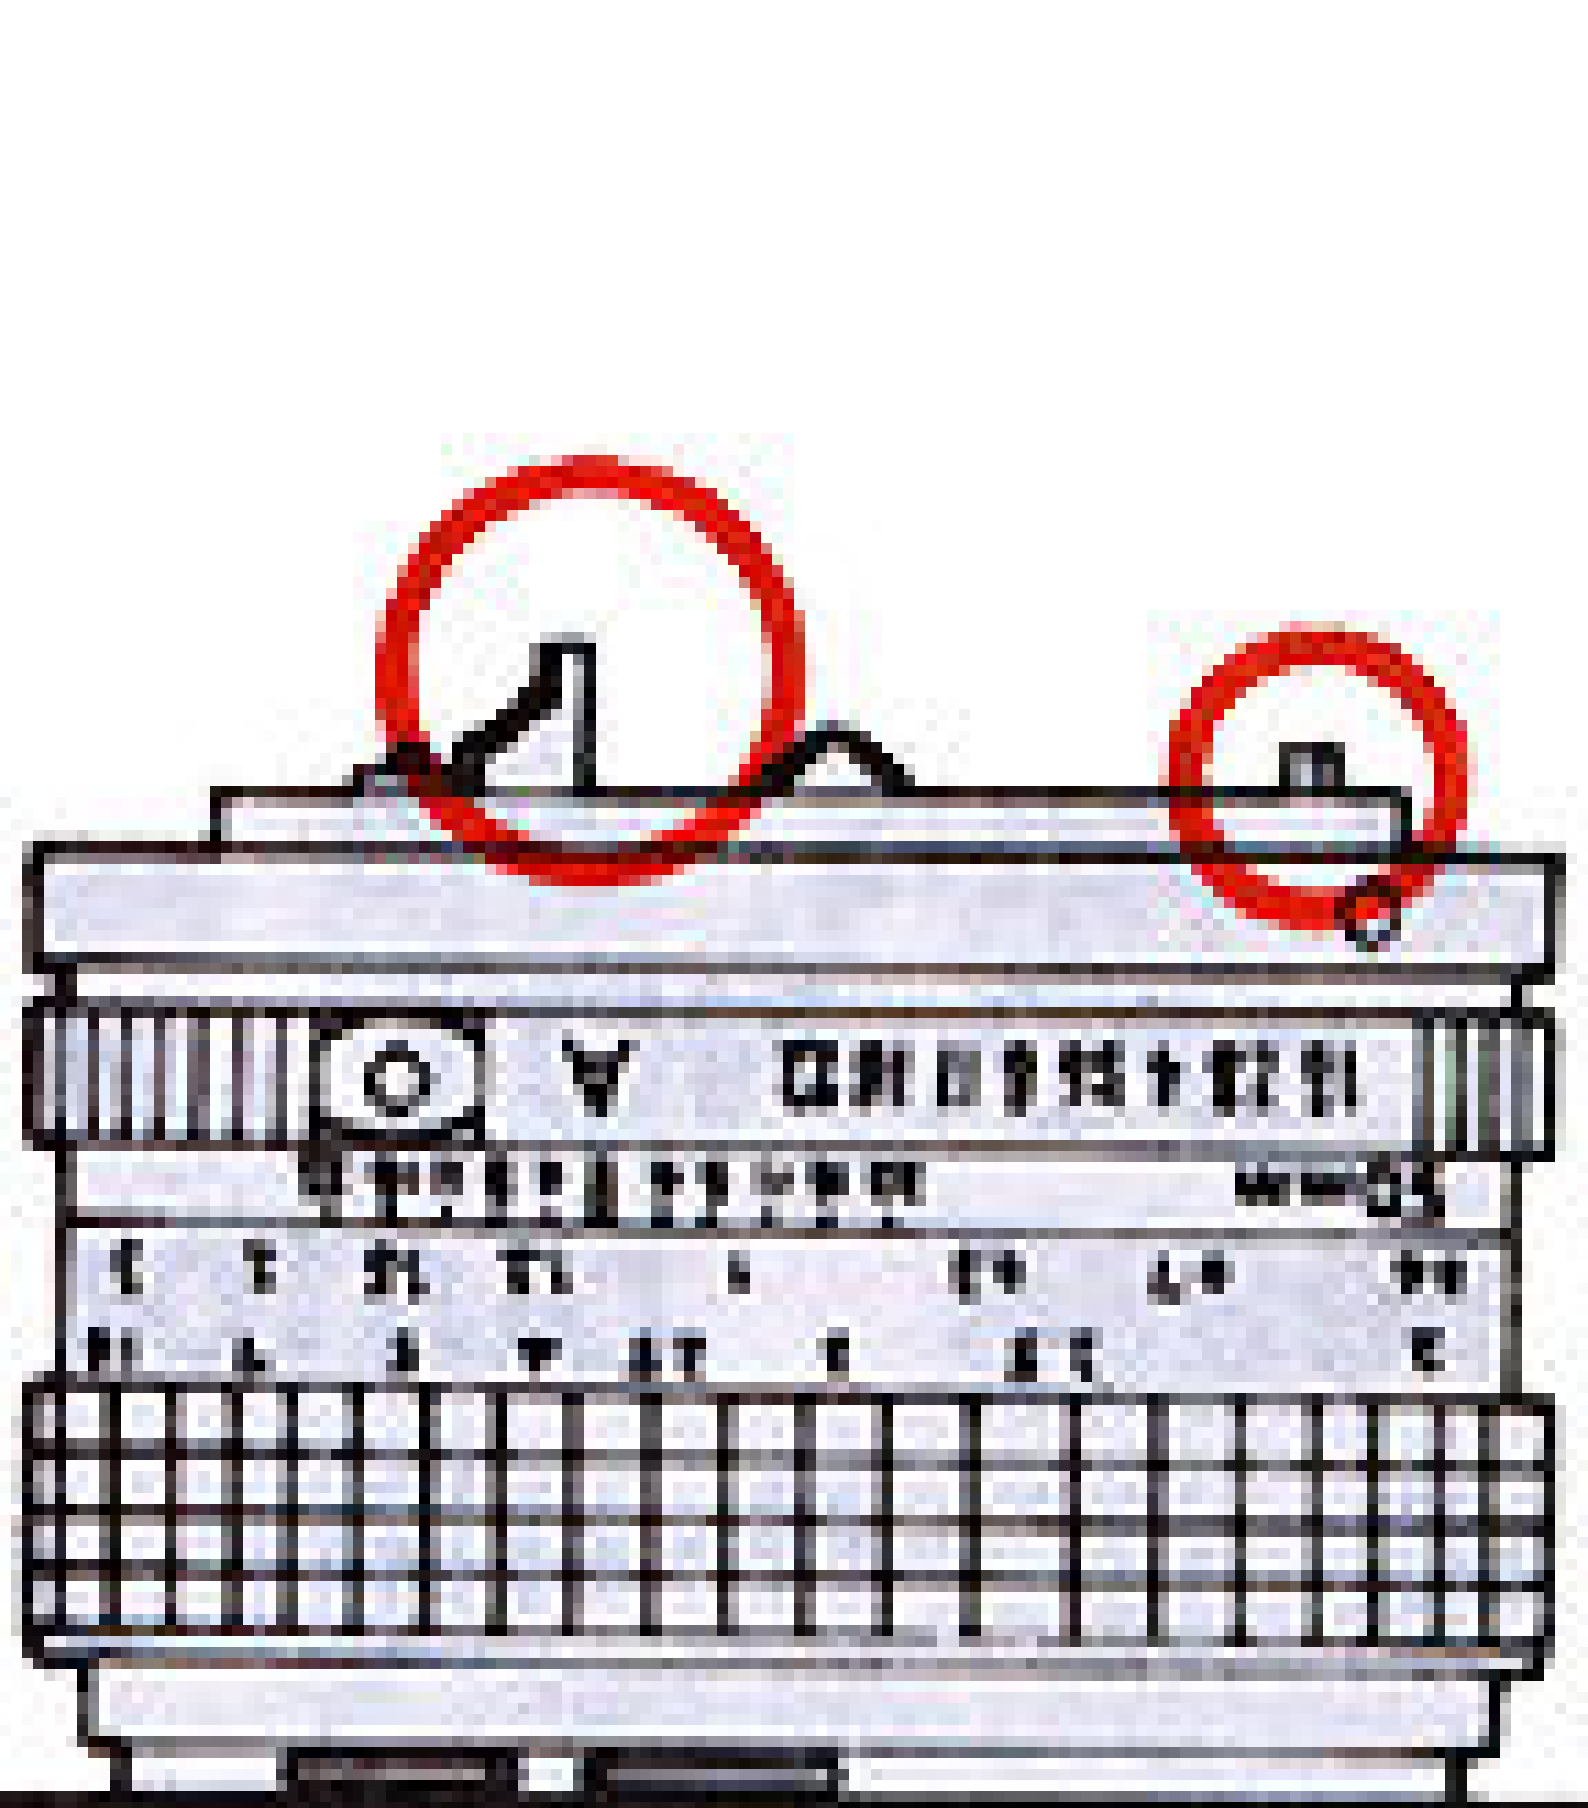


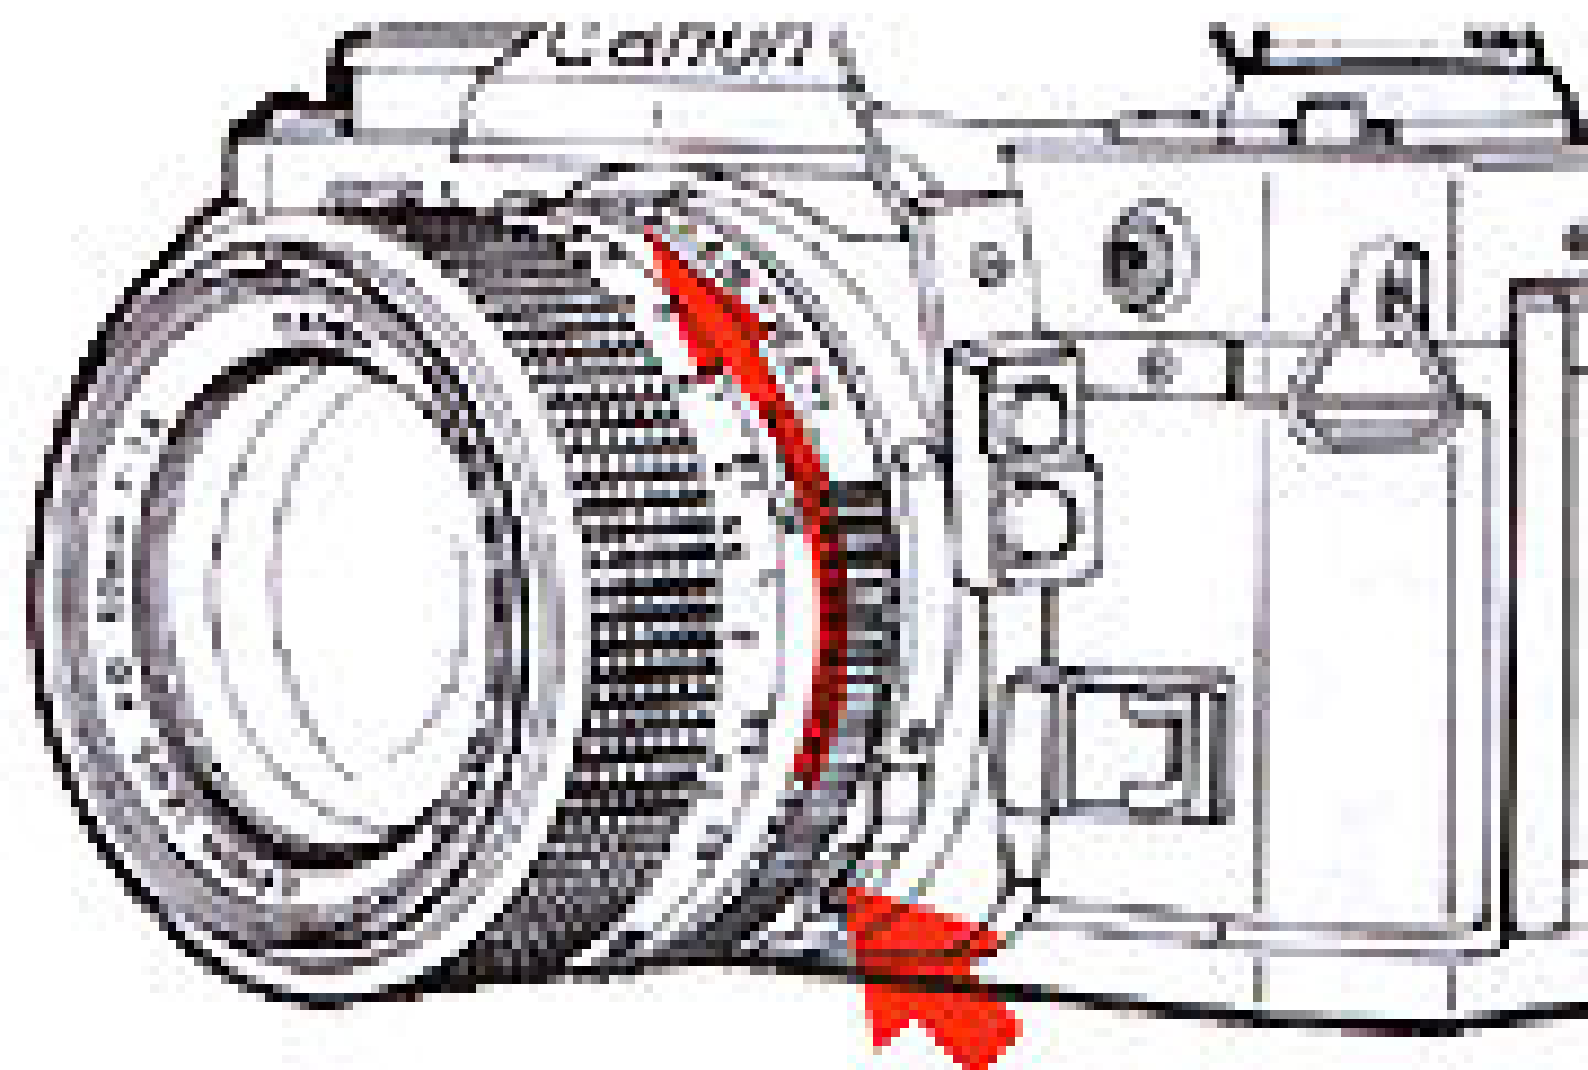

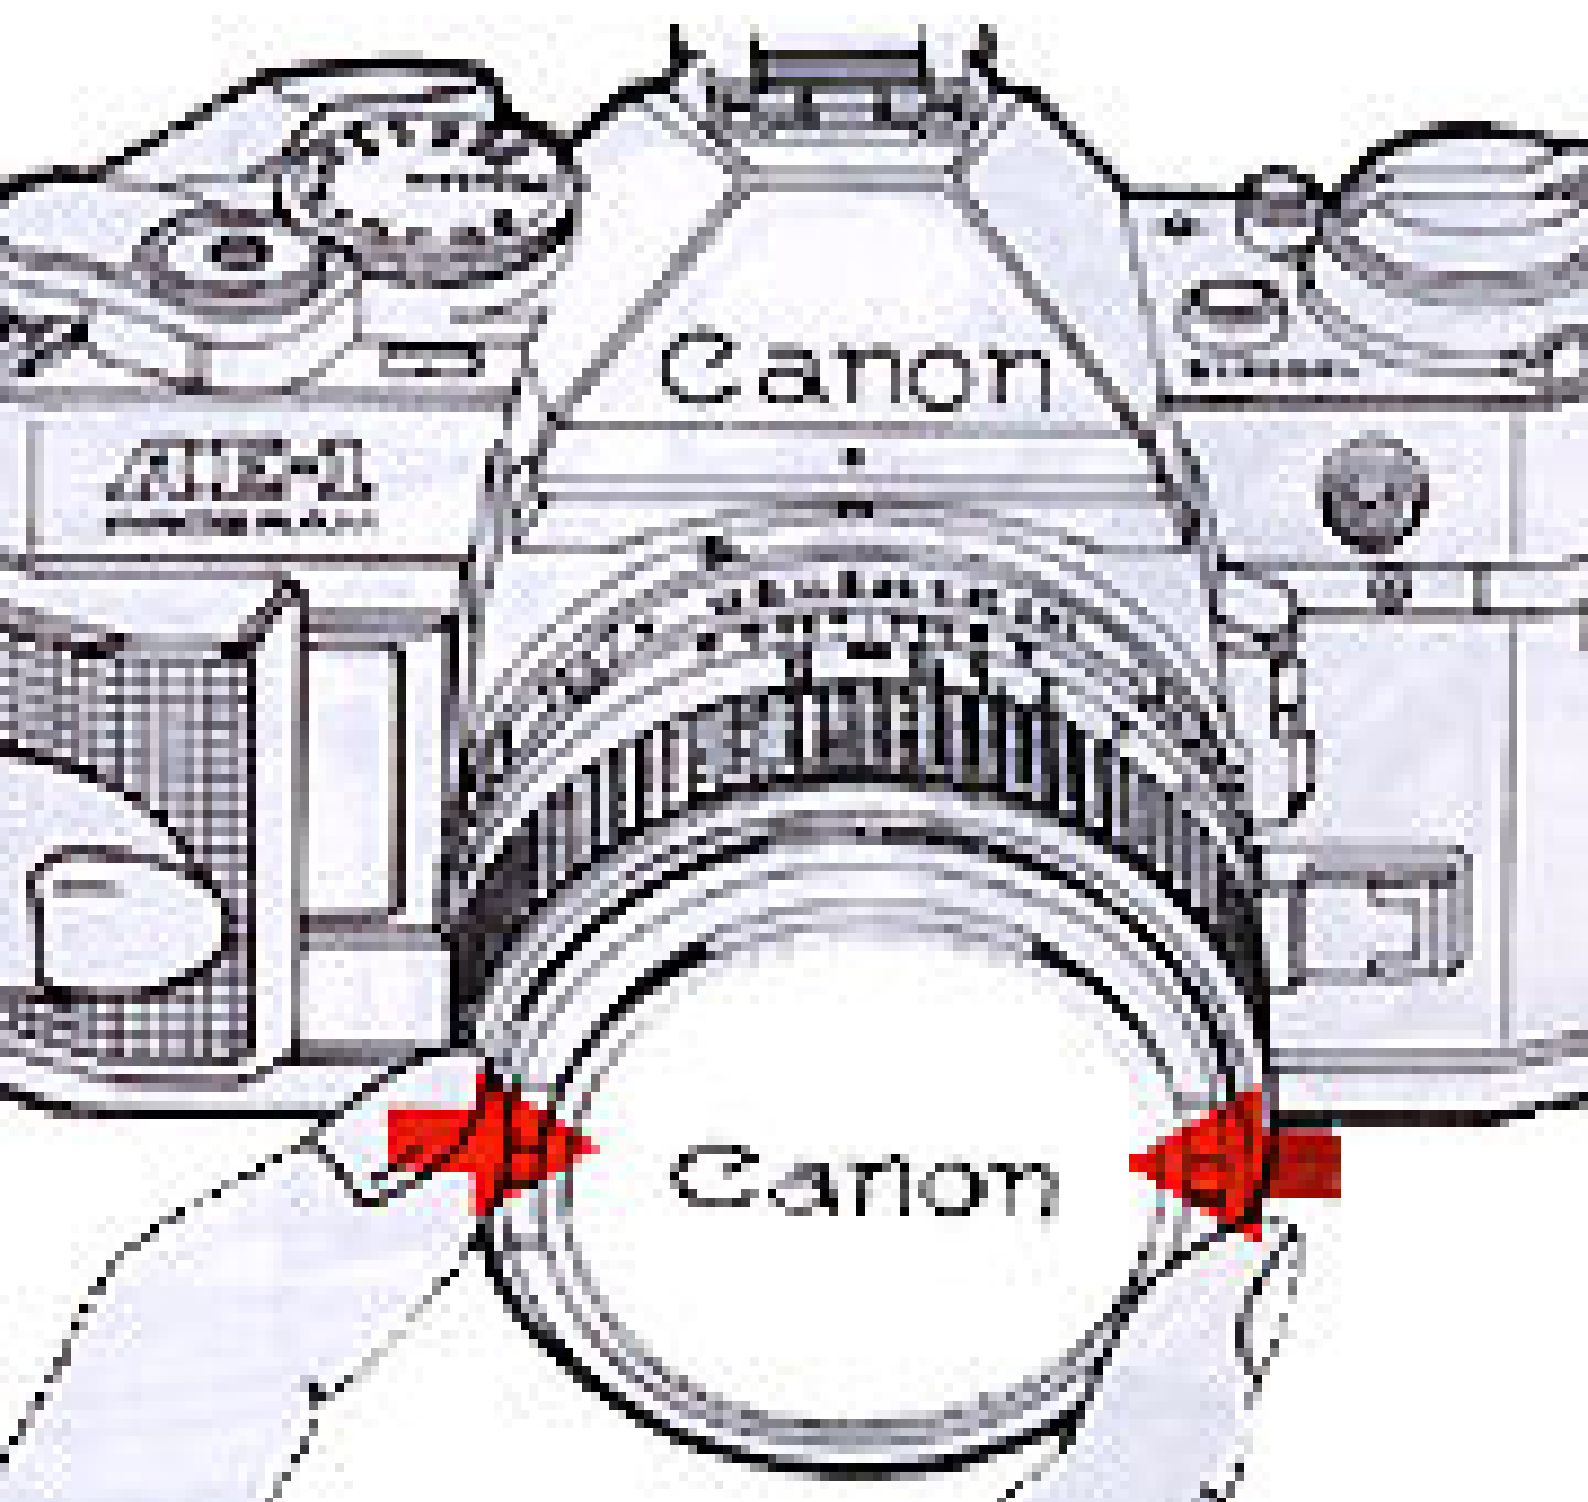





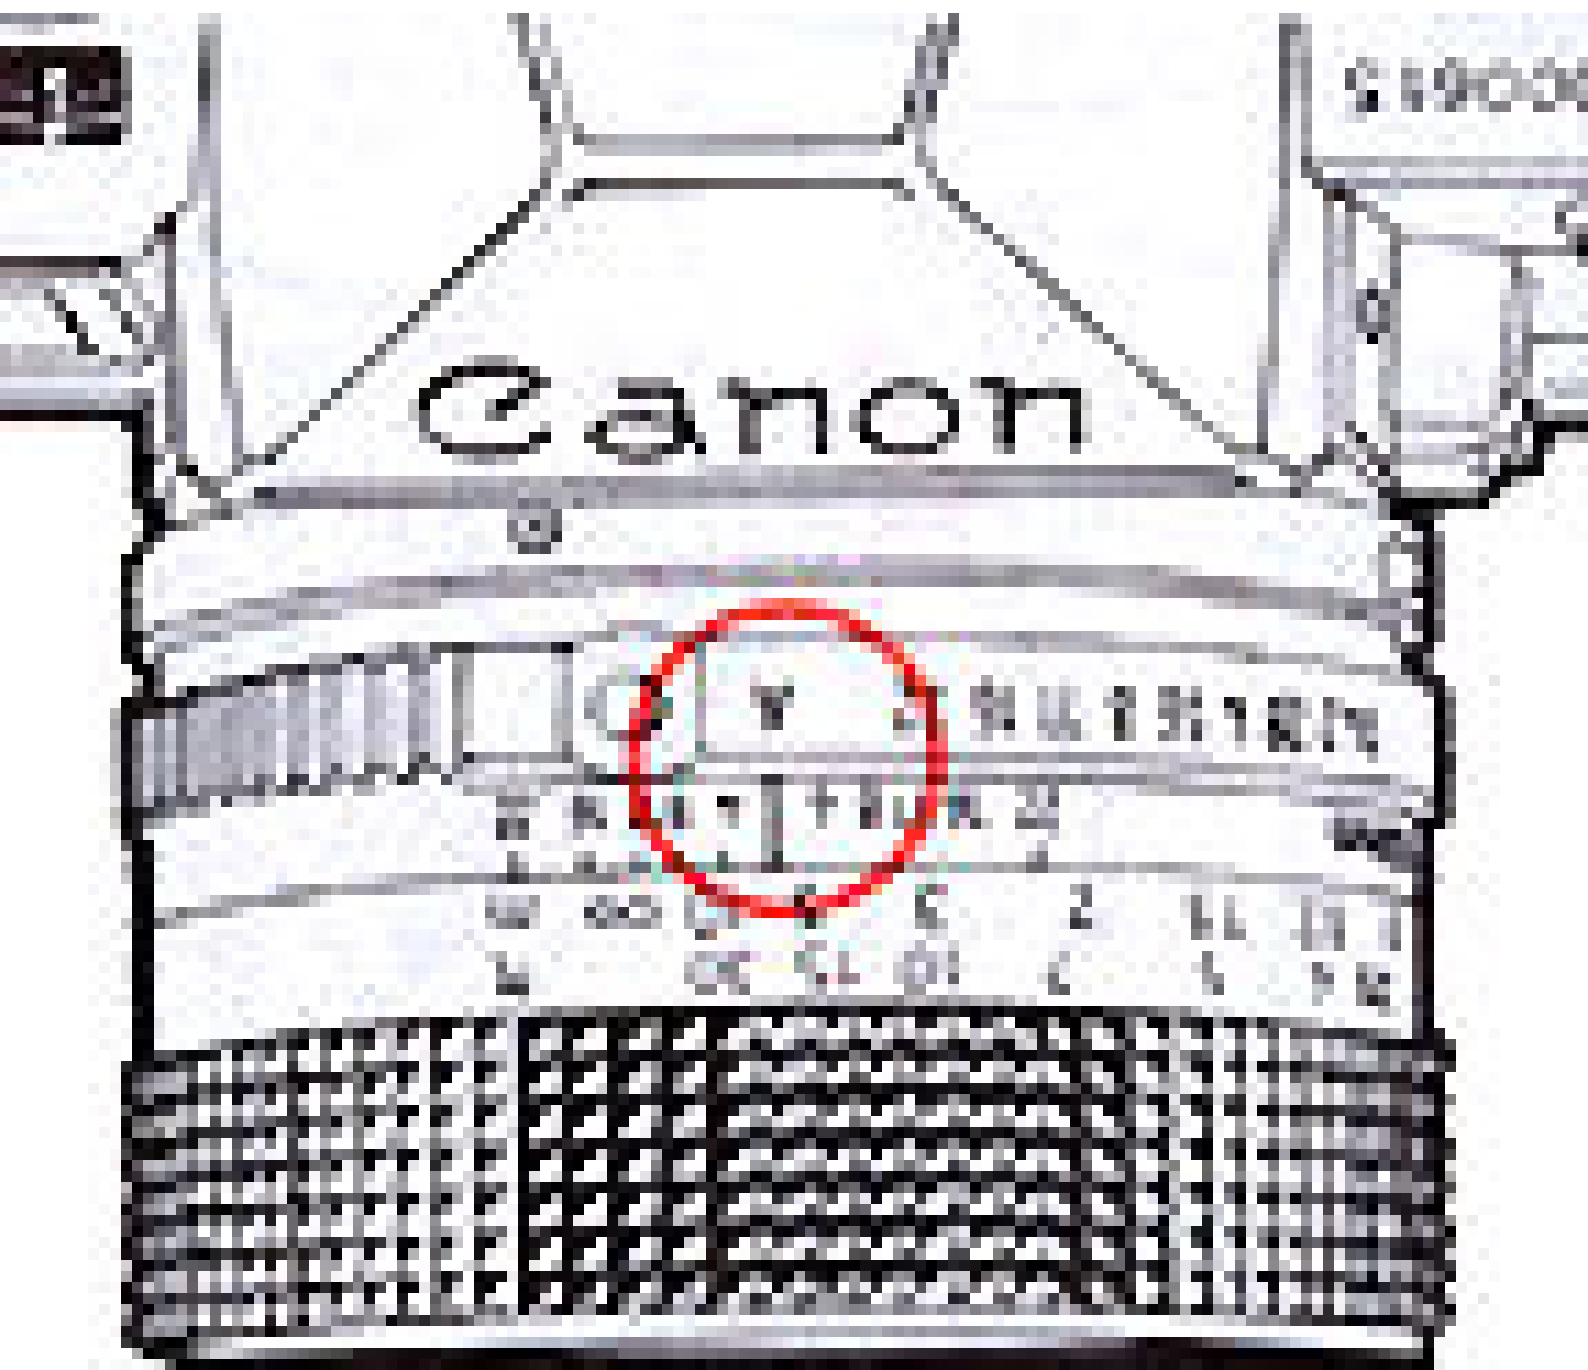

Canon





Y


1/1000

1/1000


1/1000

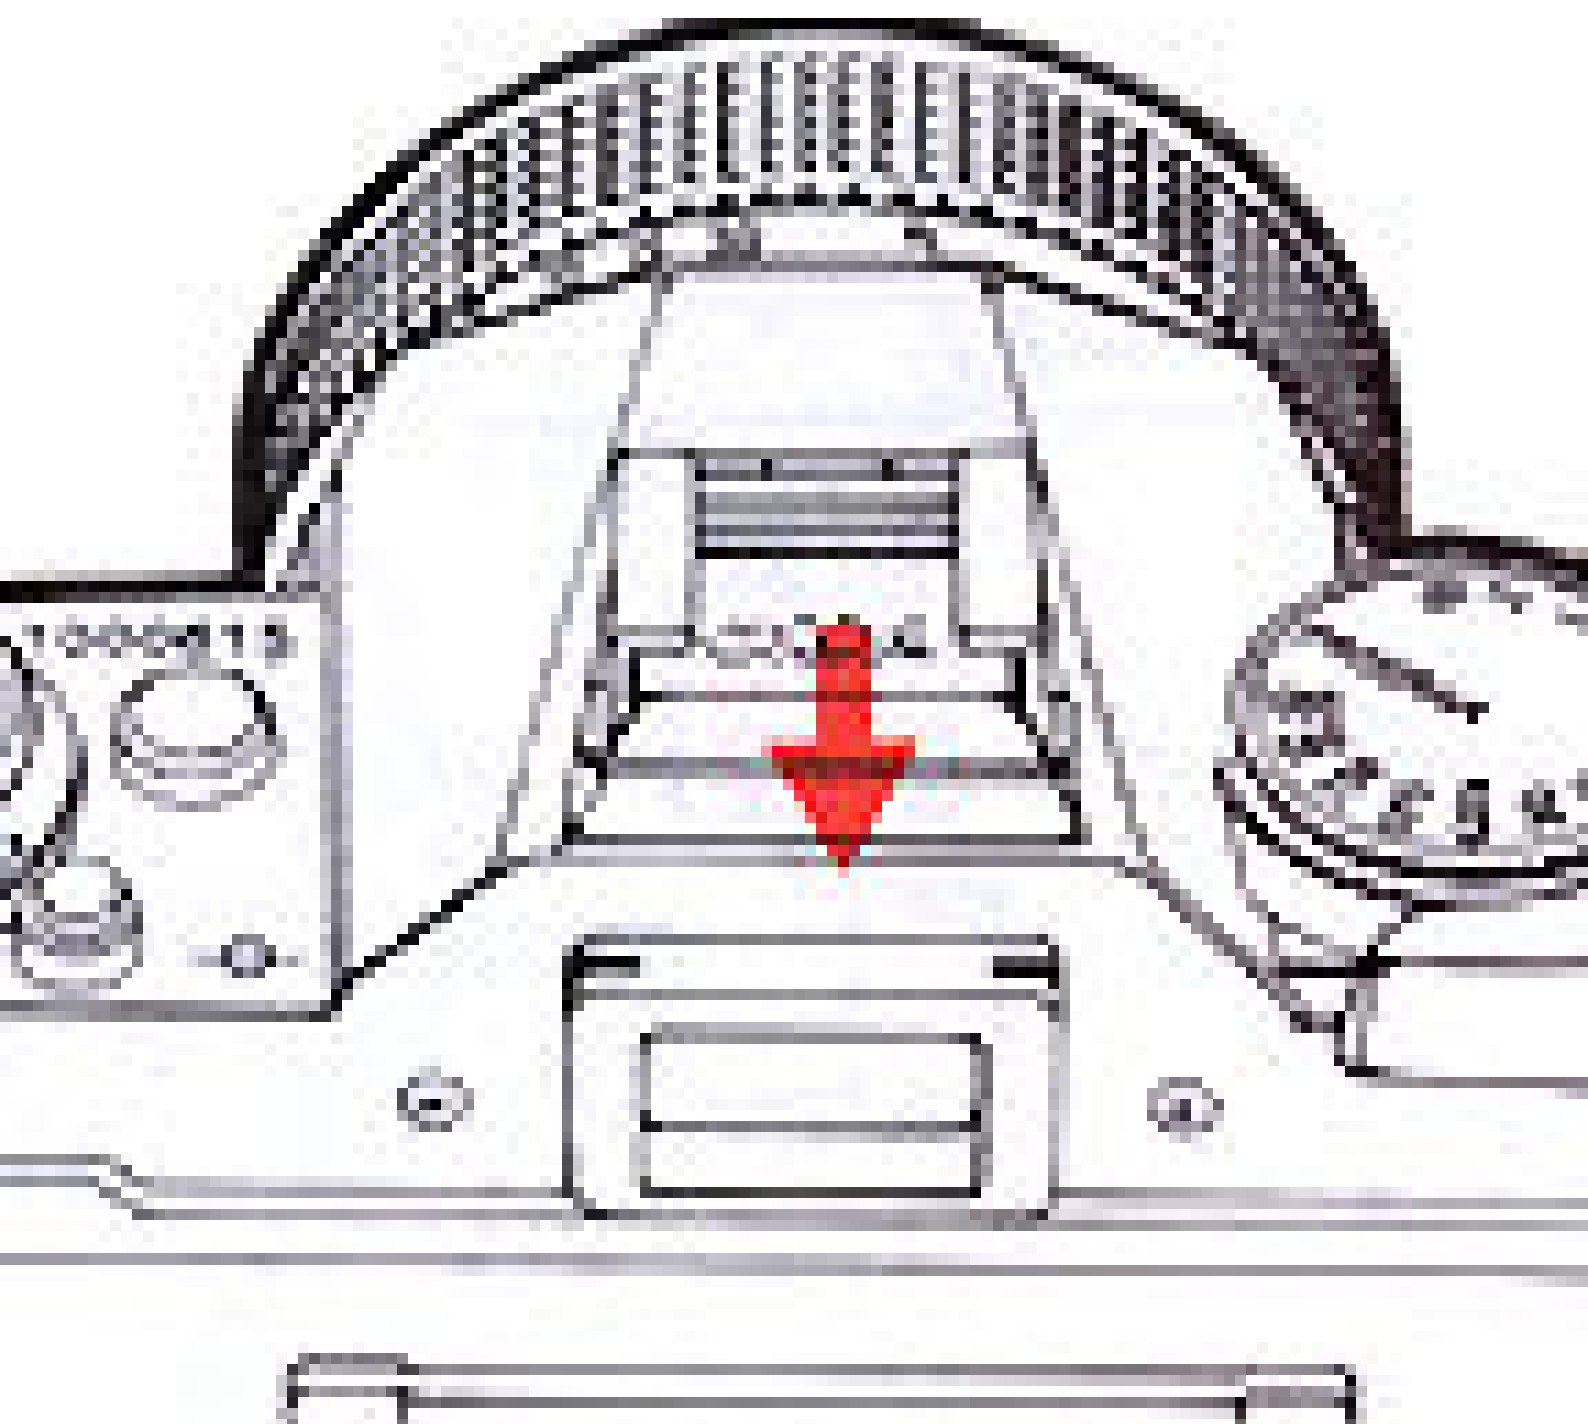

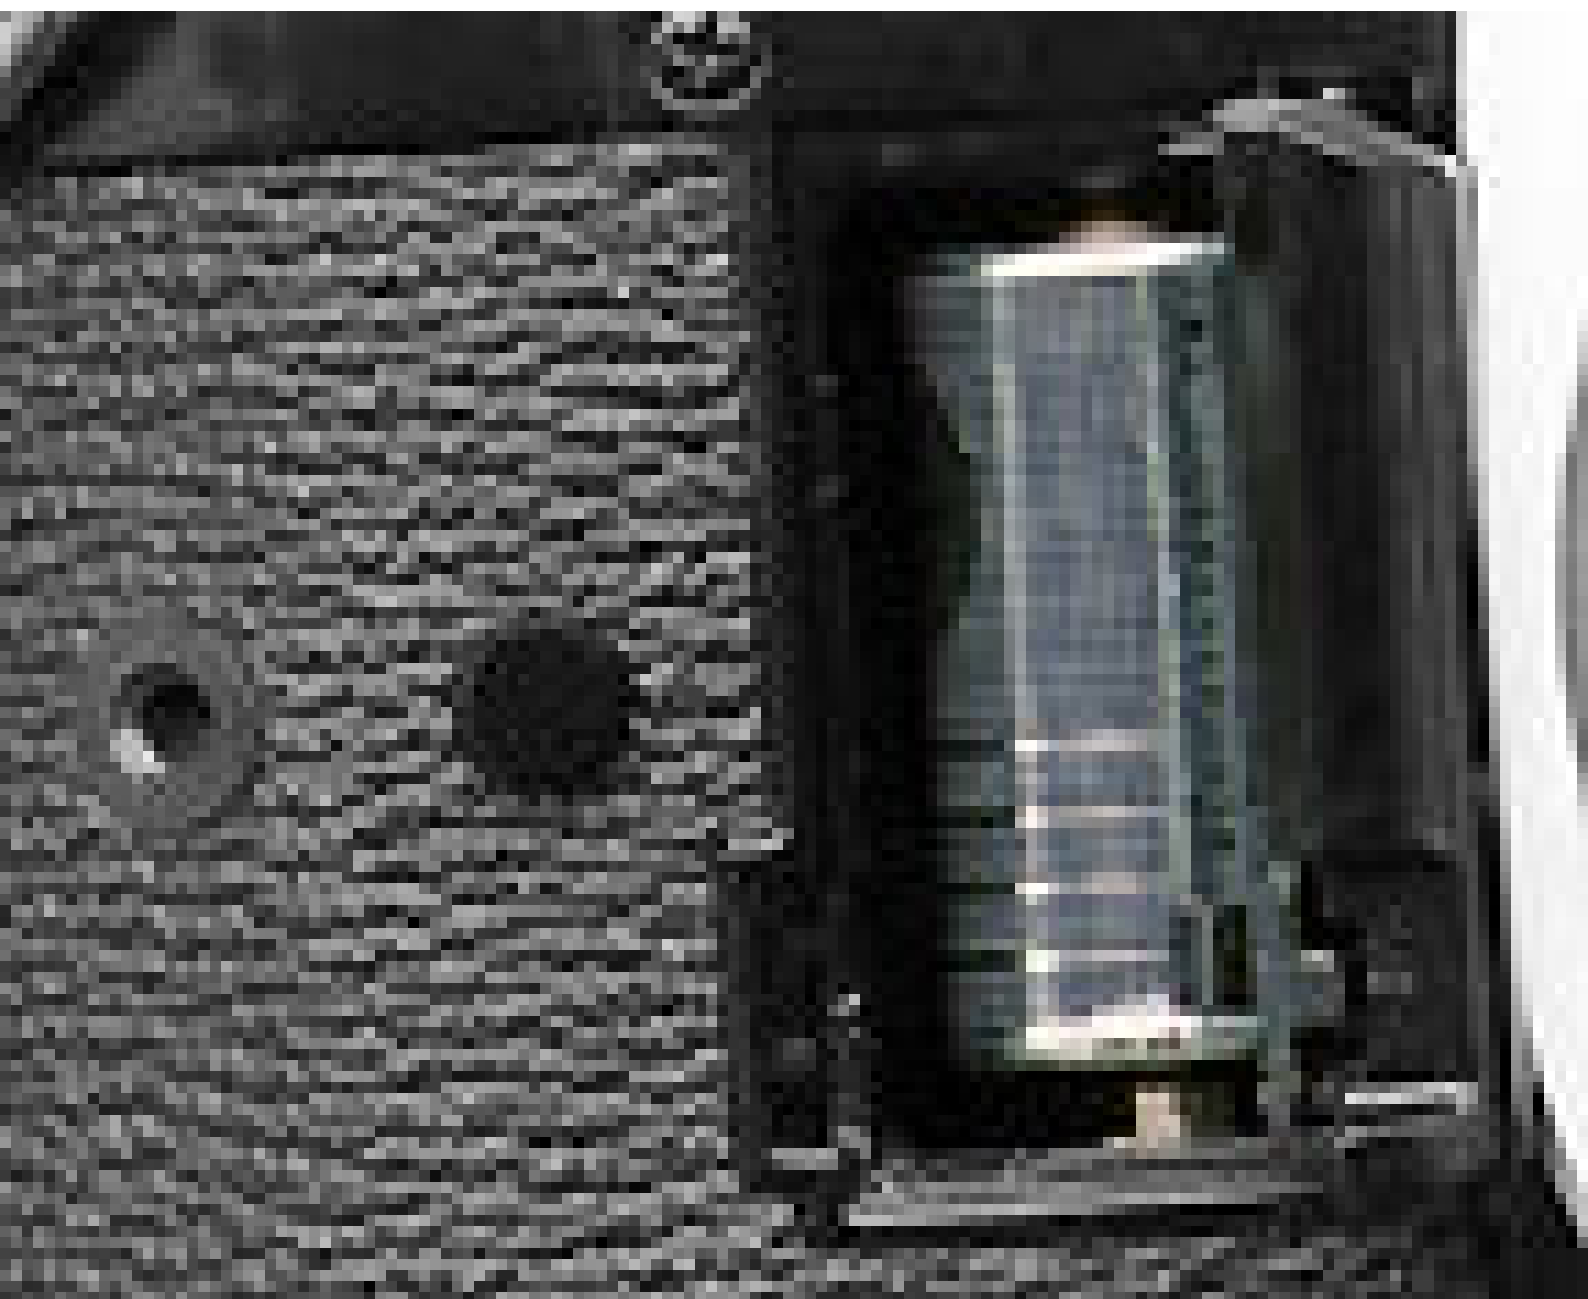

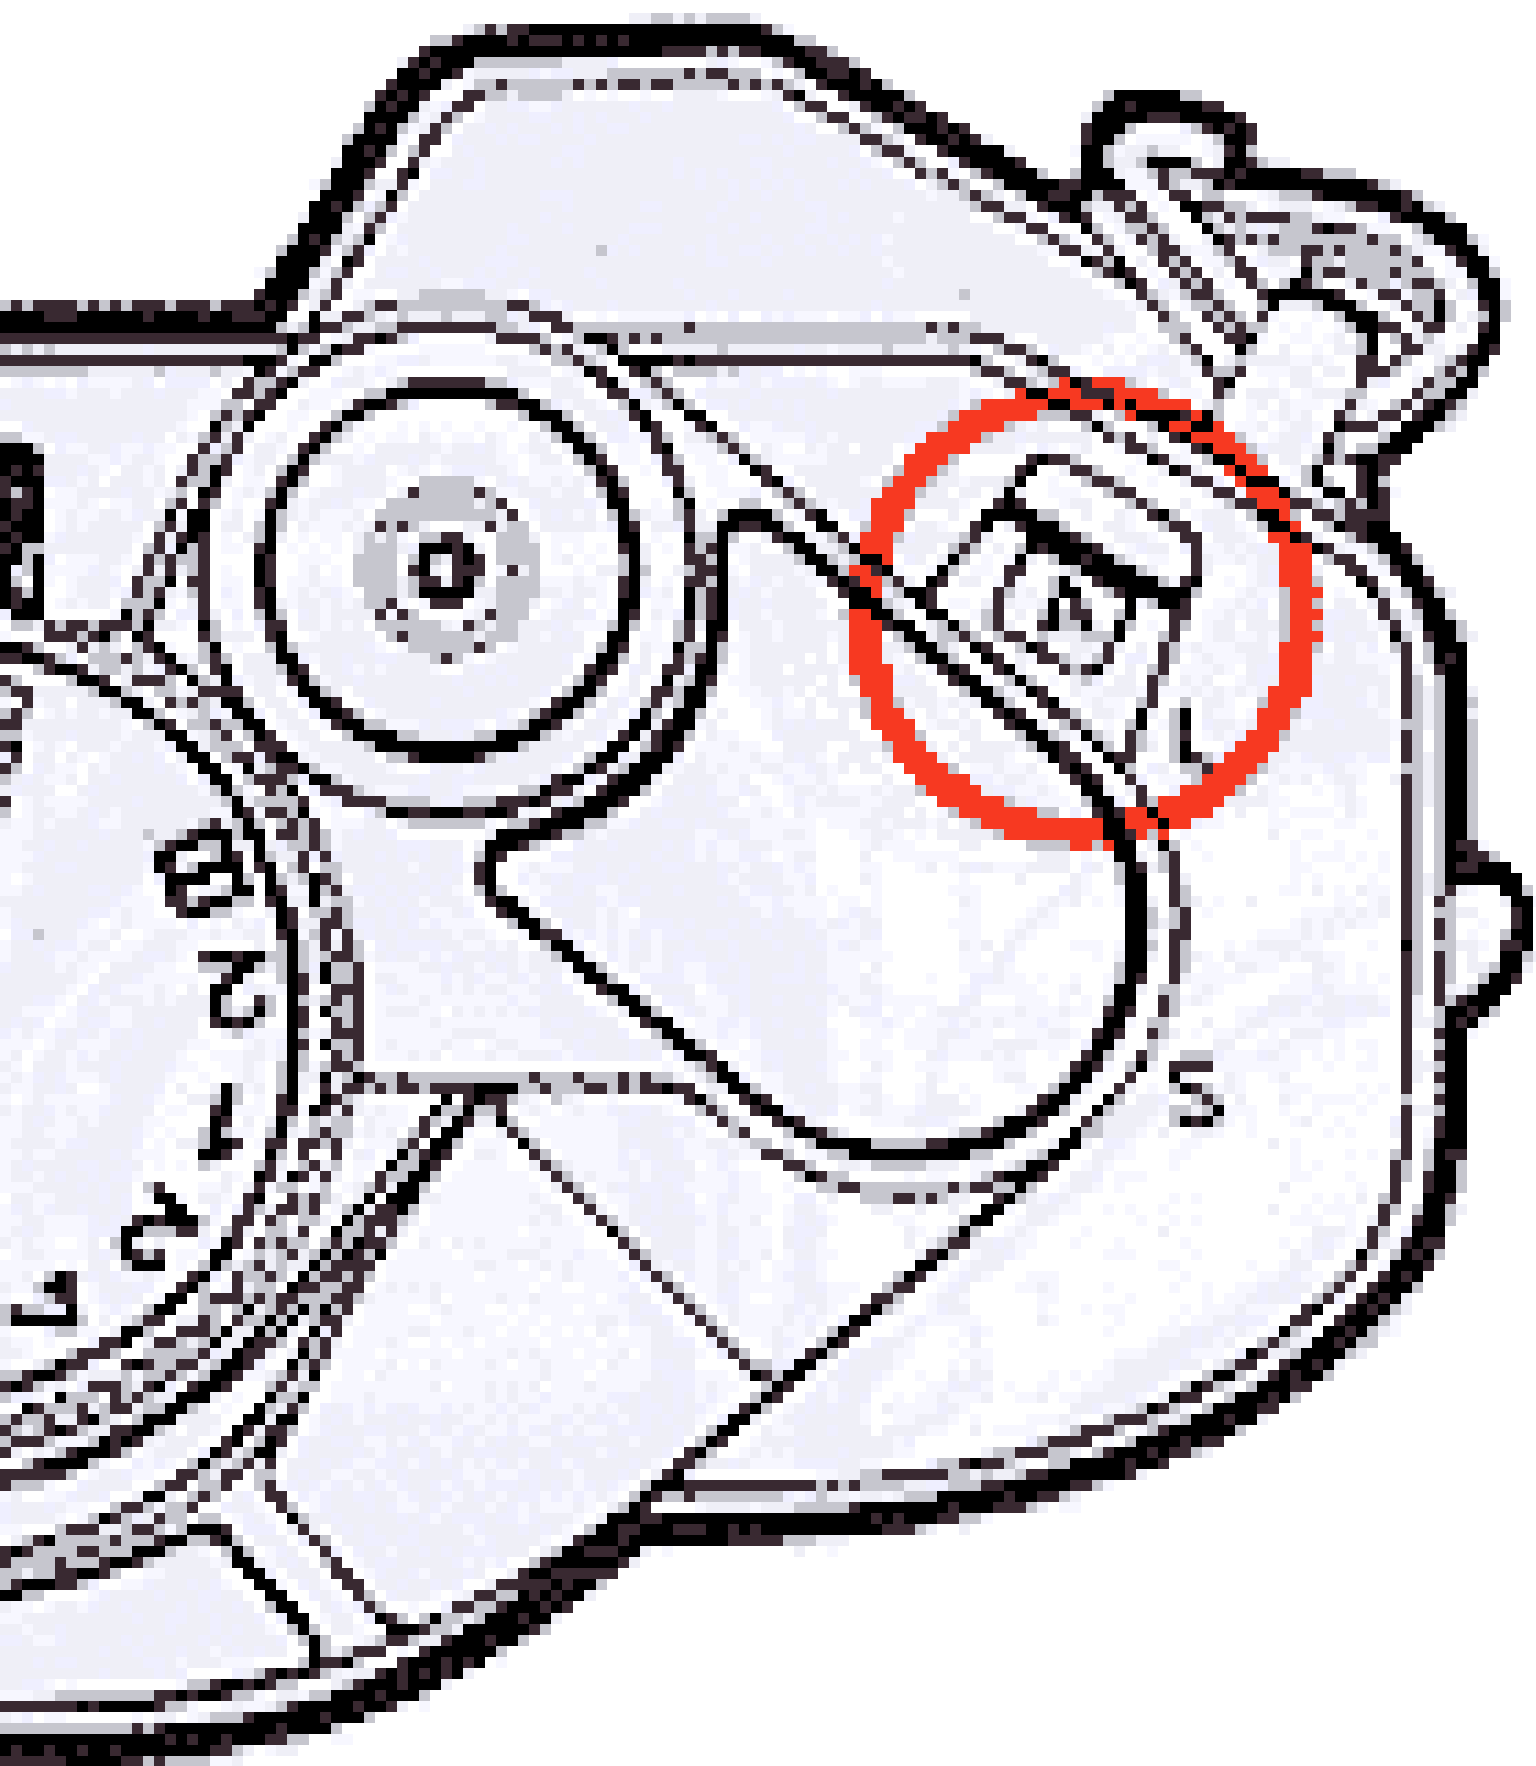



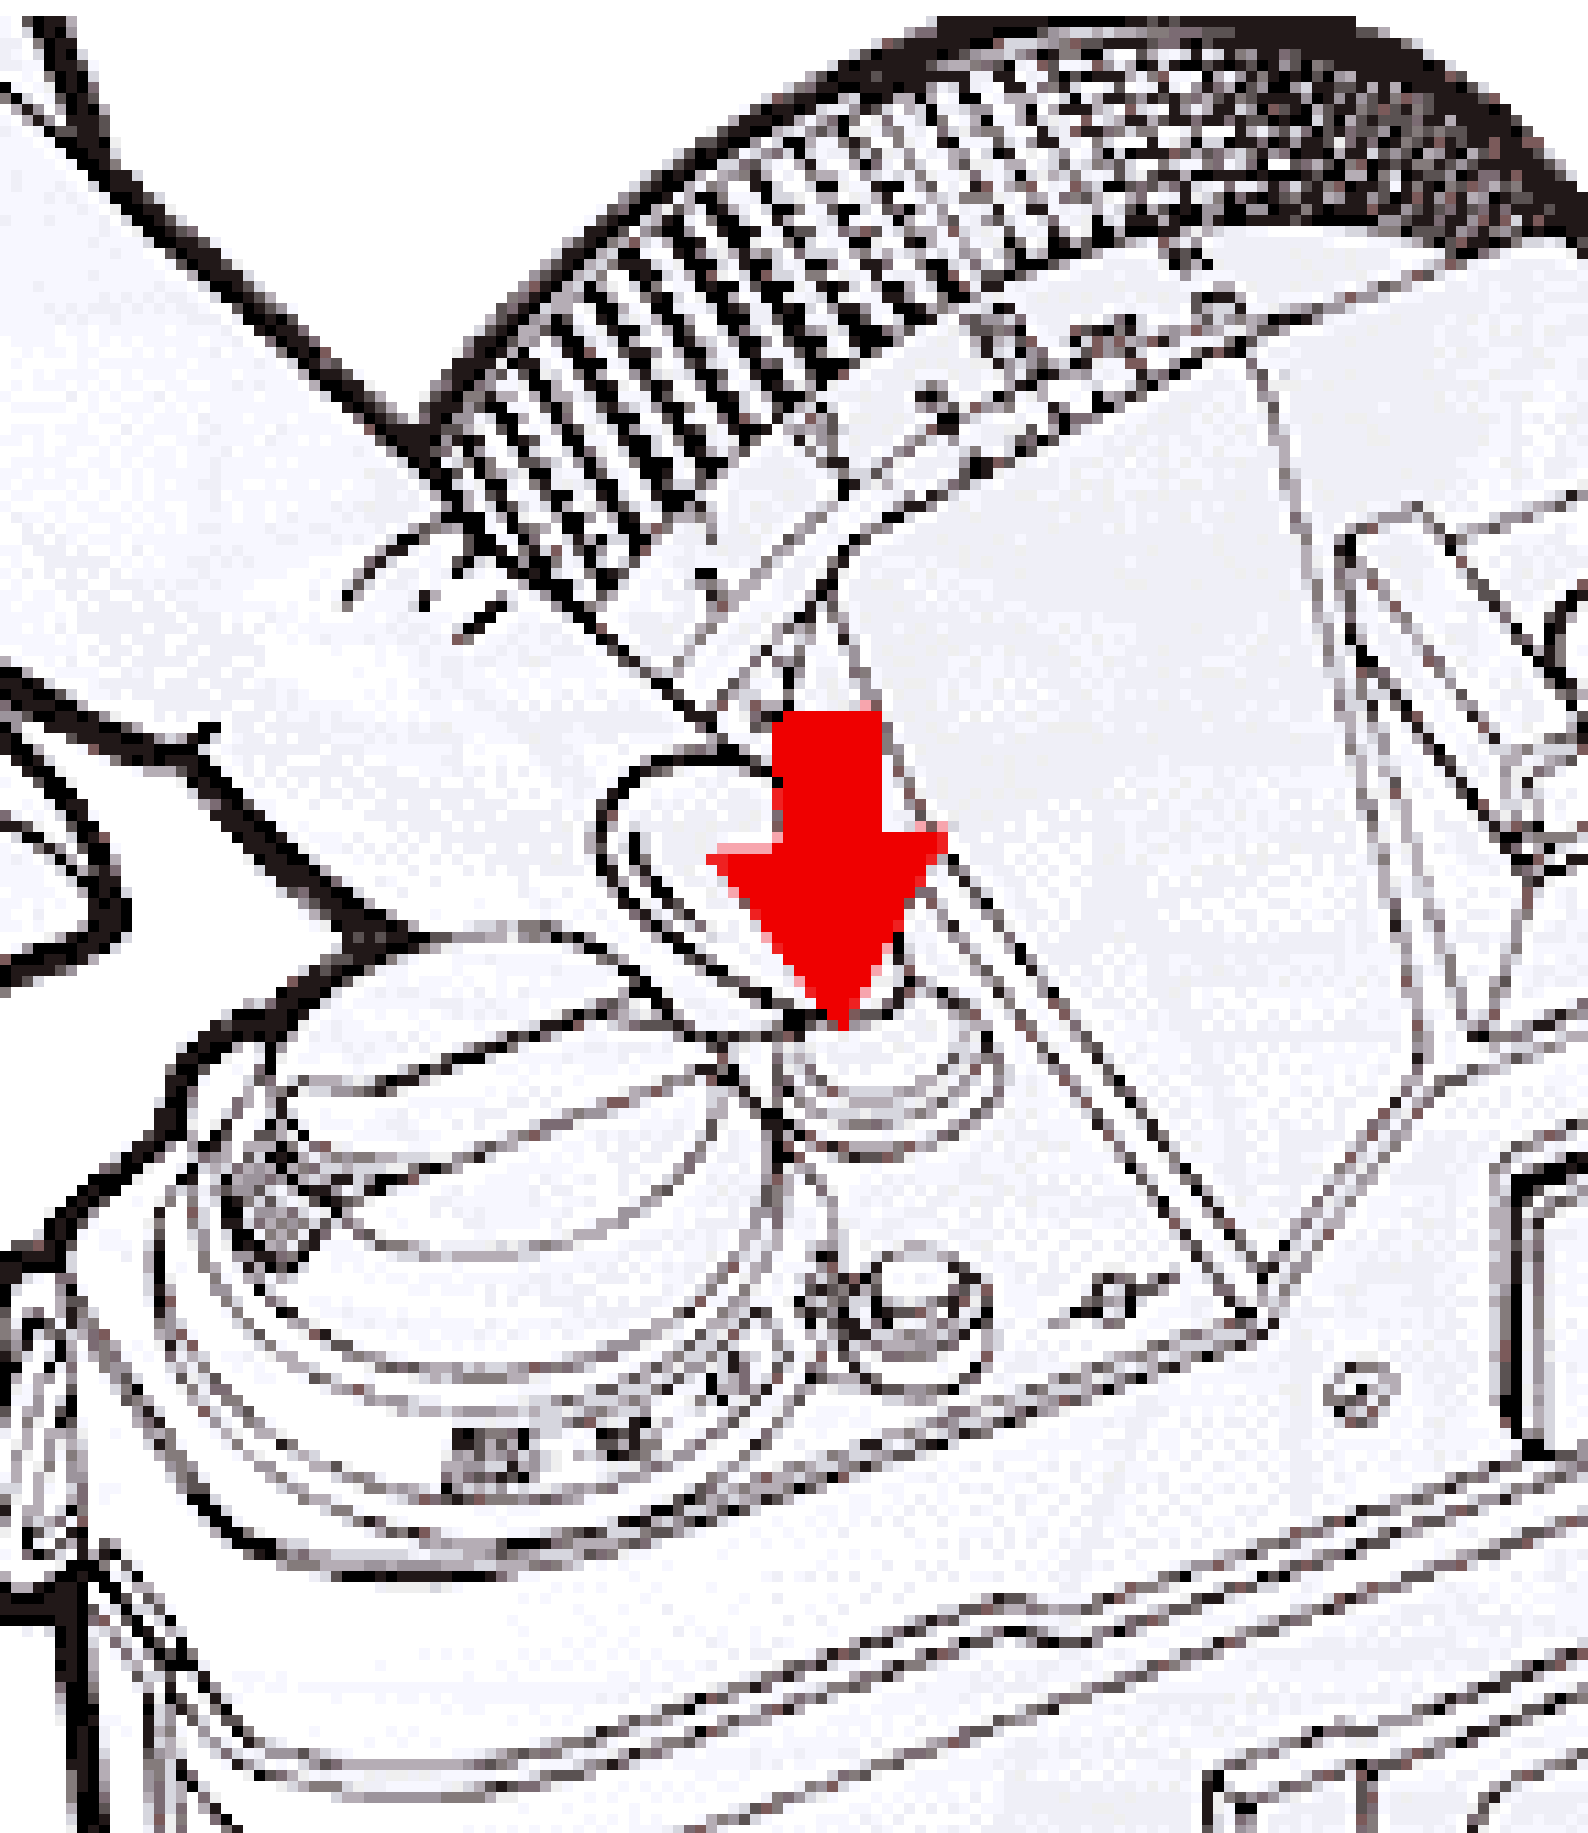



4774788




Laser-matte Screen

Manual Aperture
Control LED

Programmed AE
Control LED

Microprism Ring



New Split
Rangefinder

Stopped Down
Metering Index Mark

Flash Charge-completion LED Display
(with Speedlite 188A: AE Flash Confirmation Signal)

Aperture Display





















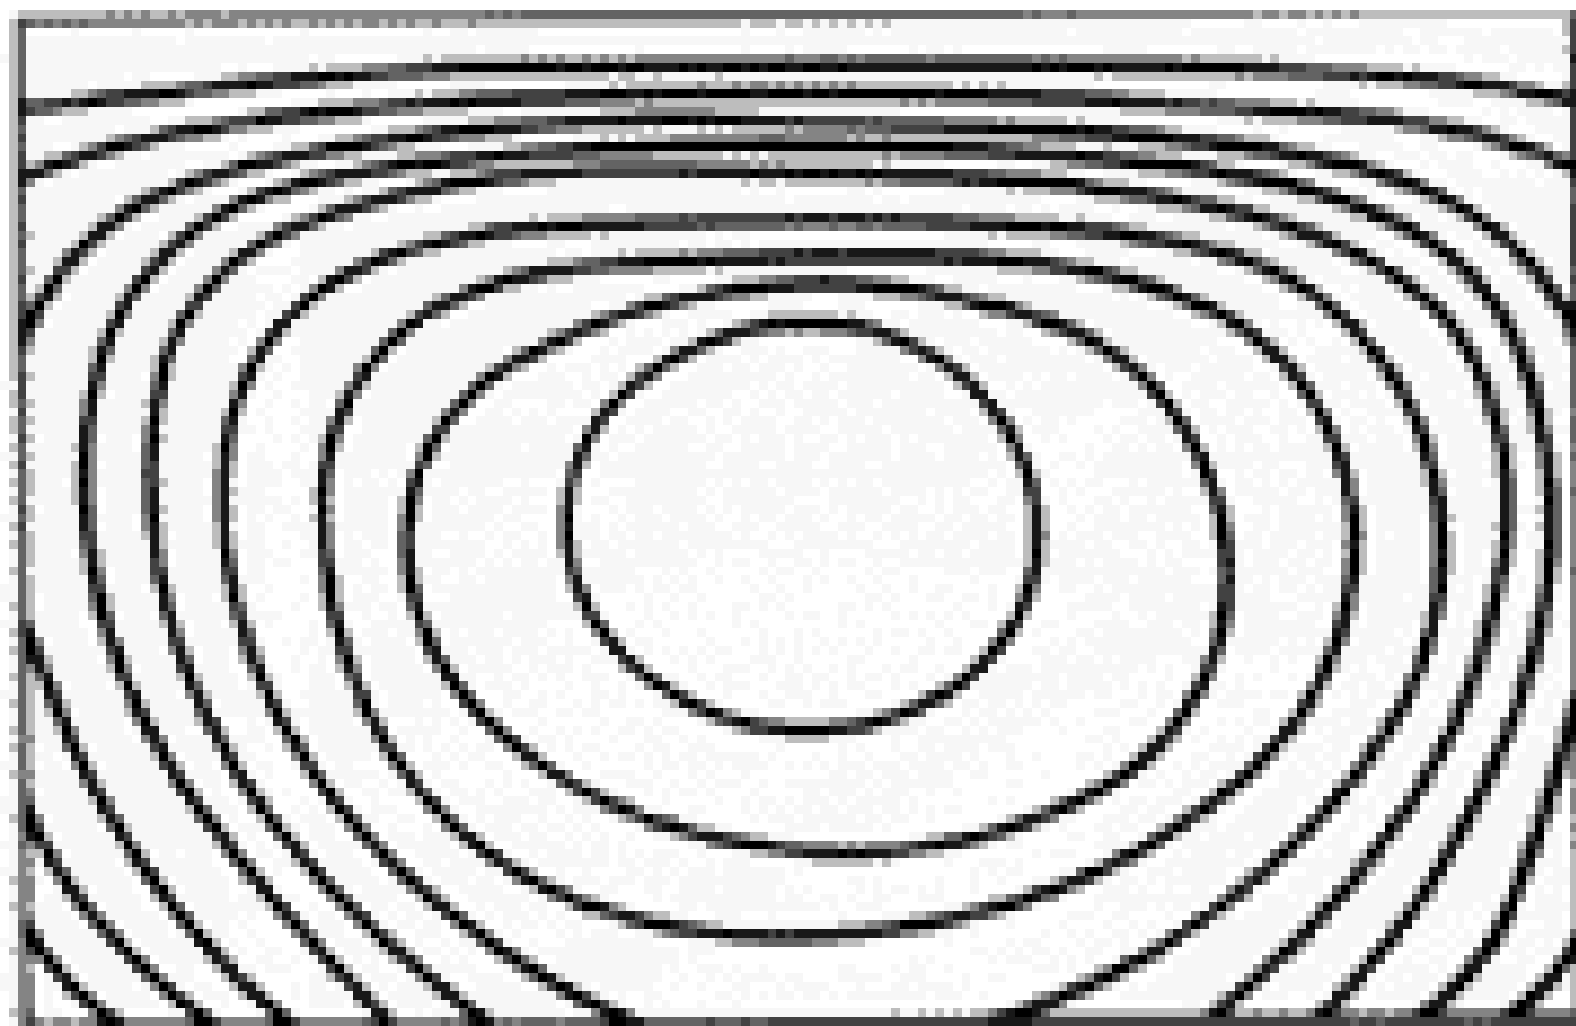







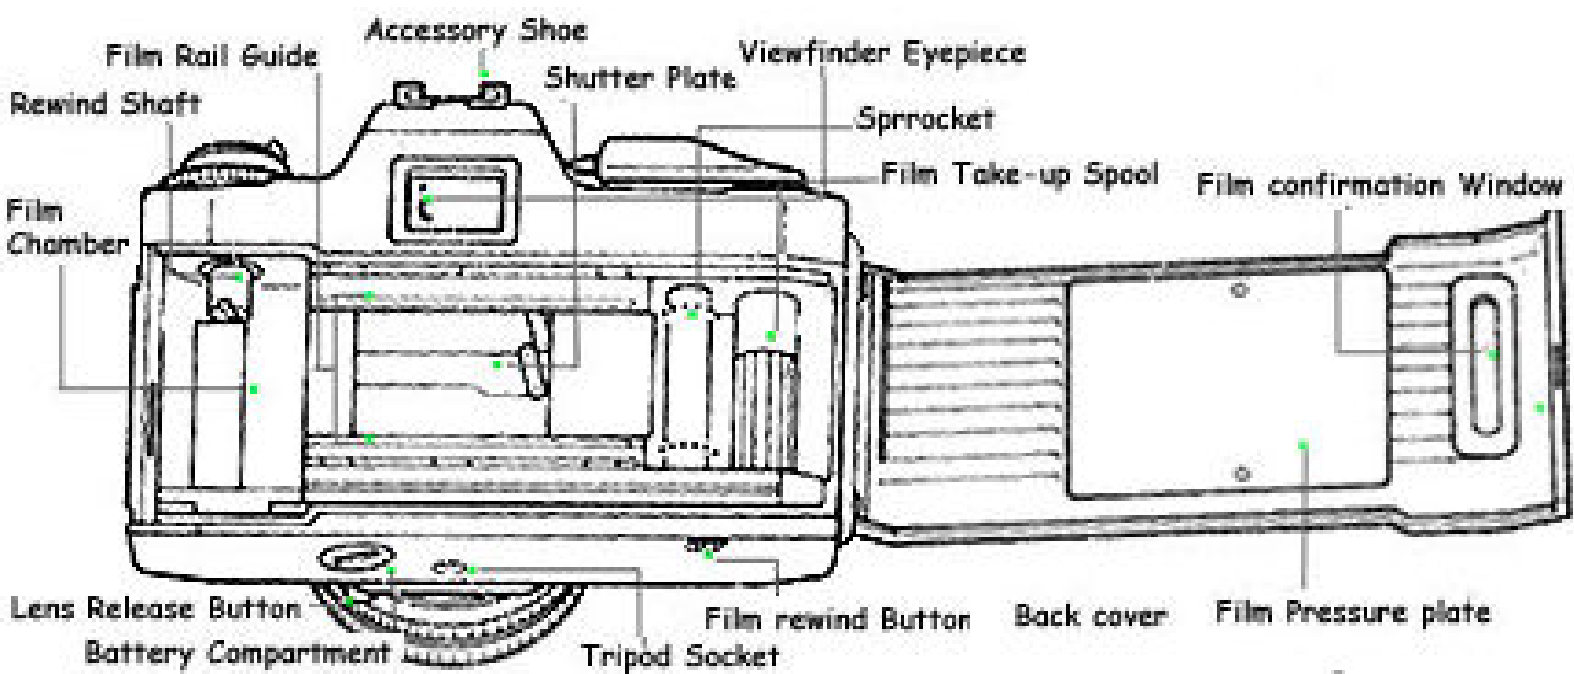

Canon T60

INSTRUCTIONS







Shutter Speed Lock Lever

Action Grip

Exposure Preview Button

Remote Control Terminal (With cap on)

