












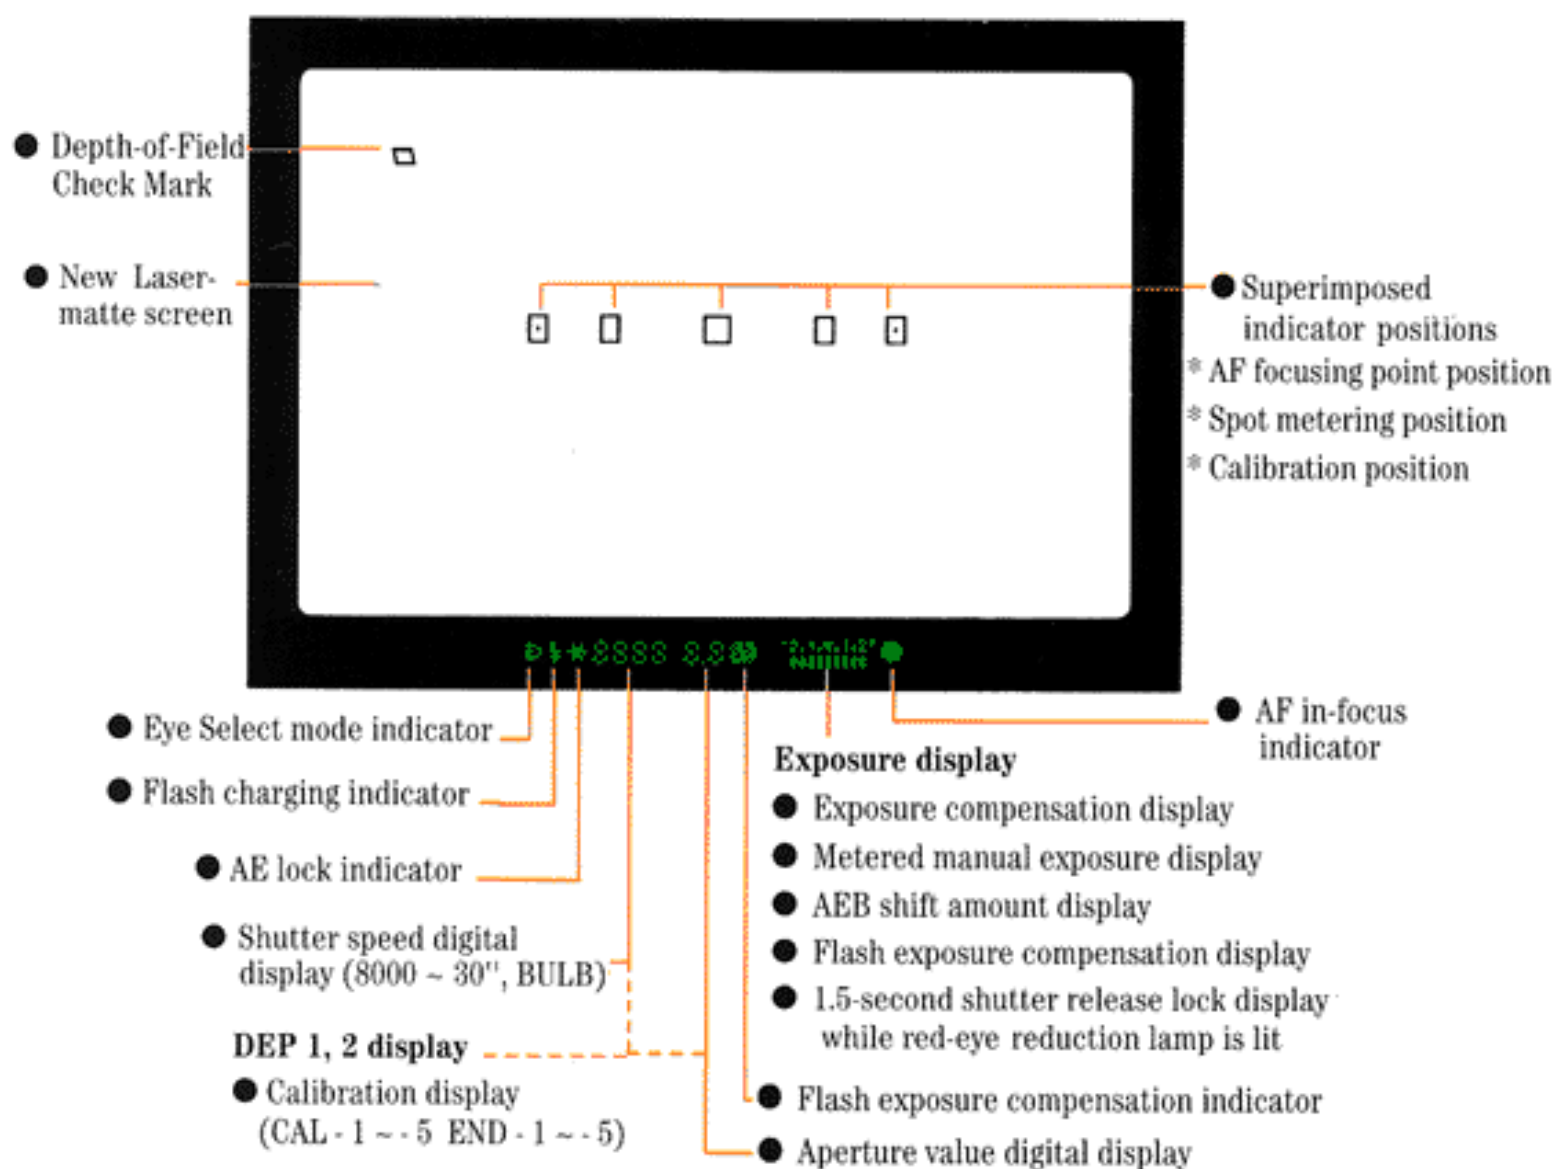

Canon

EOS

Kiss

世界でいちばん小さなカメラ
45mm EOS Kiss

















Built-in Flash

AF Auxiliary
Light Emitter/
Red-eye
Reduction Lamp

Strap Fixture

Shutter
Button

Grip/Battery
Housing

EF 38-76 mm
f/4.5-5.6 Lens

Lens Release
Button





Battery Pack PB-8
functions with Alkaline
AA or NiCd AA cells



**Remote Switch
RS-60E3**
Fires camera from 60m away



**Grip Extension
GR-80TP**
With a built-in Mini Tripod



**Soft Camera
Case SB-5**
Protective Lightweight Case



Built-in Flash / Red Eye Reduction Lamp

**AF-assist Beam Emitter
/ Self Timer Lamp**

Lock release button

**Camera back
Latch**

Hand Grip


**EOS
50E**


EVF CONTROL

Battery Compartment Cover

Lens release Button



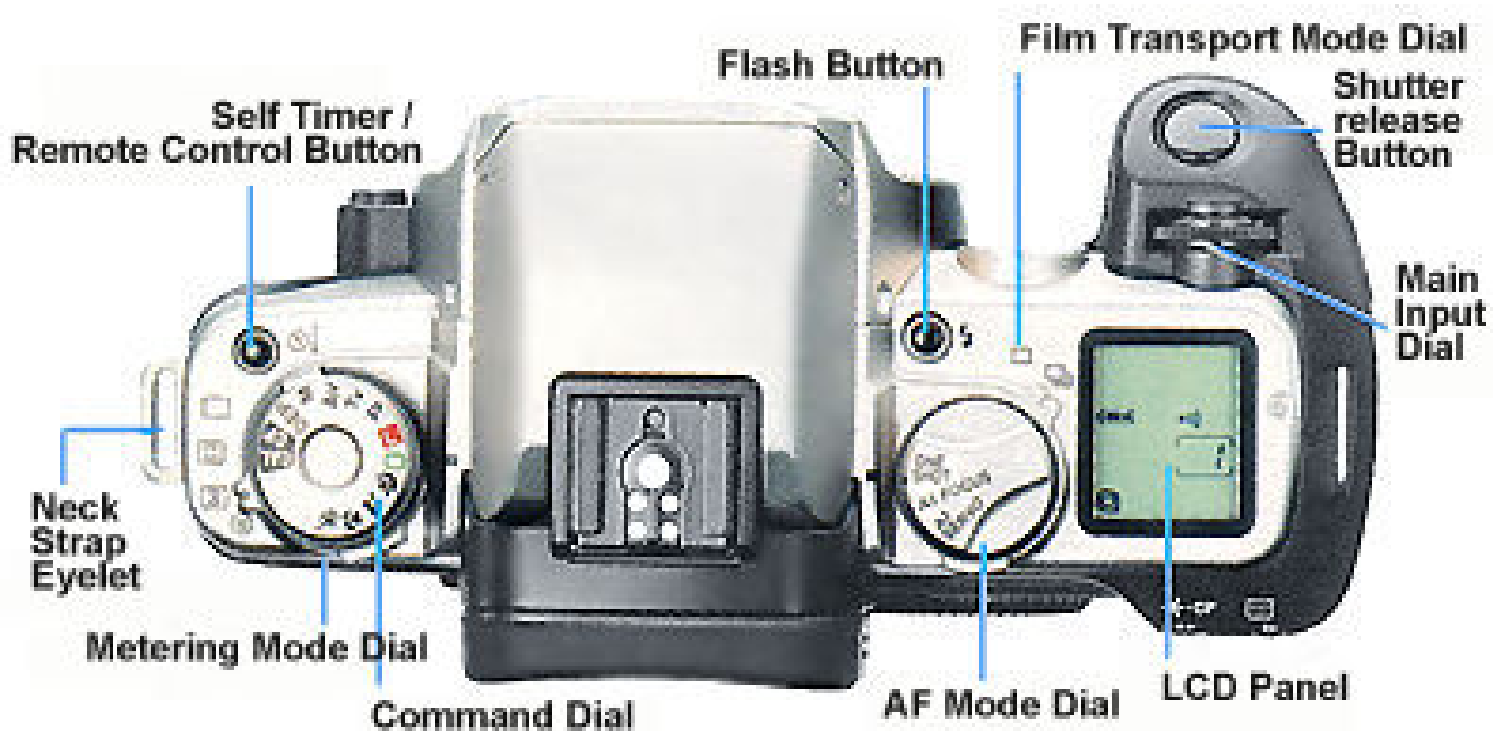


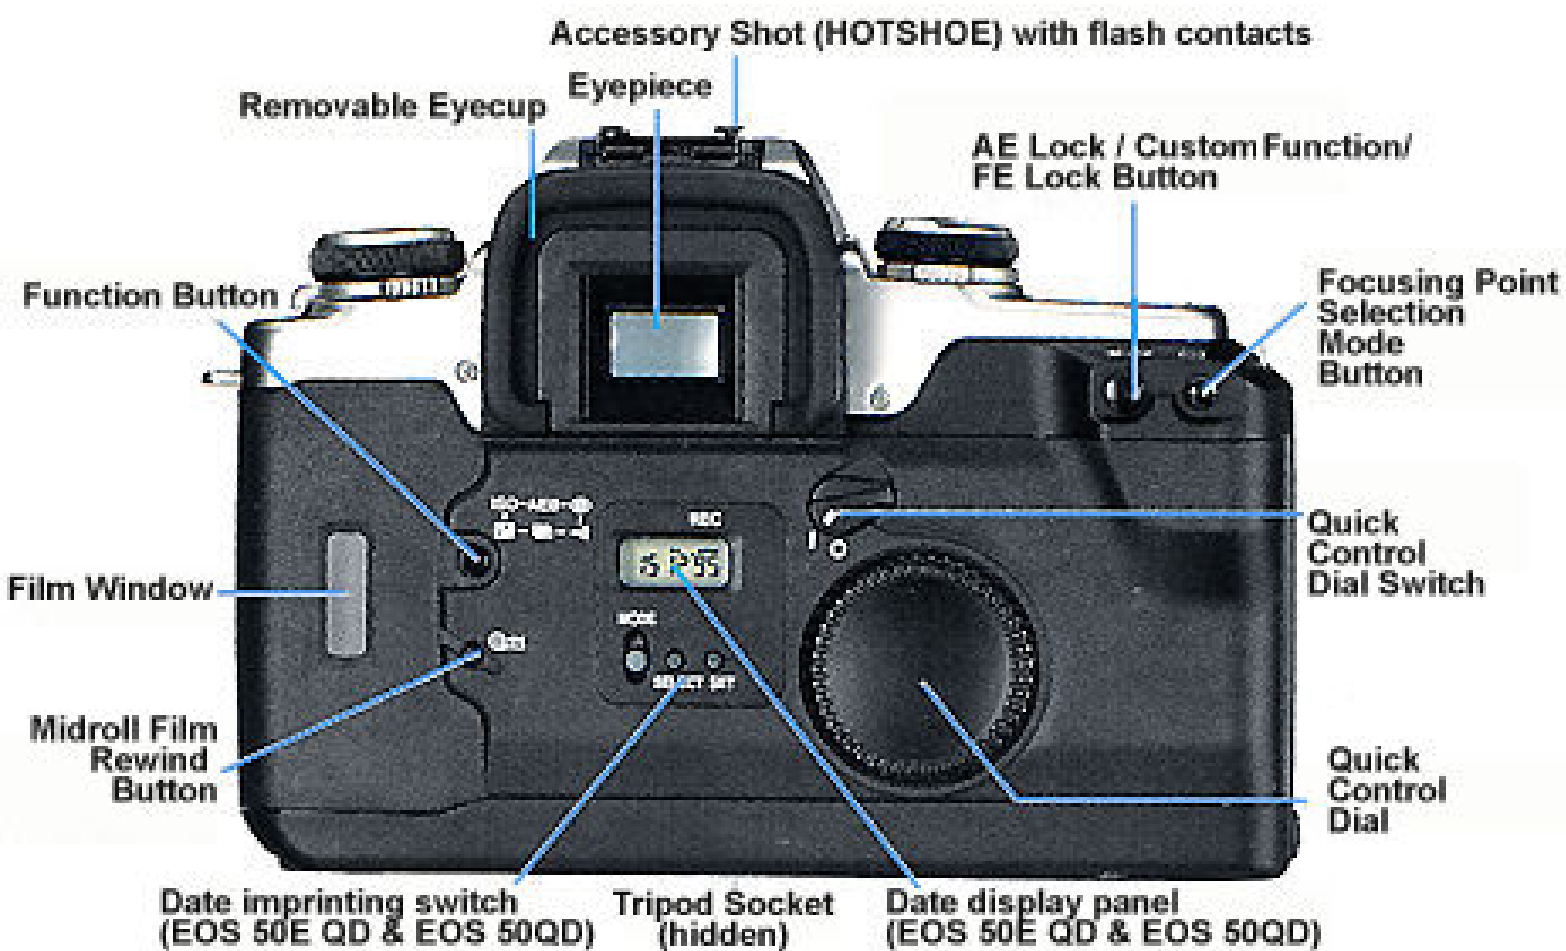

* EOS Elan II E / EOS-55



Depth-of-field
preview mark

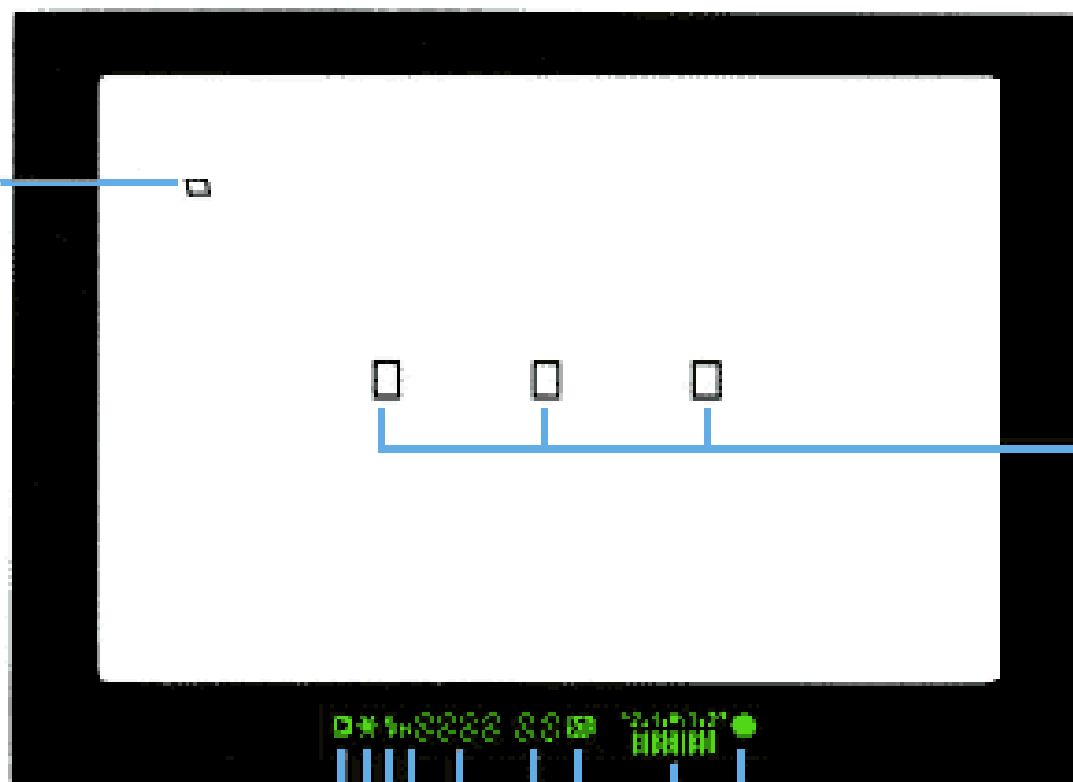

Focusing points

Eye-controlled autofocus symbol
(50E/QD only)

AE Lock indicator

Flash ready indicator

High sync speed FP flash indicator

Shutter speed

FE Lock indicator

Calibration indicator

(50E/QD only) DEP point no

In focus indicator

Film rewind indicator

Exposure compensation amount

Metered manual exposure level

AEB amount

Red-eye reduction lamp on indicator

Flash exposure compensation indicator

Aperture value


* EOS Elan II E / EOS-55

□ × ⚡ H 0000 0.0 ⚡/2 -2.1.1.2+ ●

Shutter speed settings
 ISO film speed
 DEP (Depth-of-field AE)
 Custom function no.
 Calibration status (50E/QD only)

Aperture value
 AEB amount
 DEP points
 Custom function settings
 Red-eye reduction setting
 Beeper setting
 Calibration no. (50E/QD only)

Eye-controlled focus
 Battery check (four levels)
 Flash exposure compensation
 Self-timer/Remote control

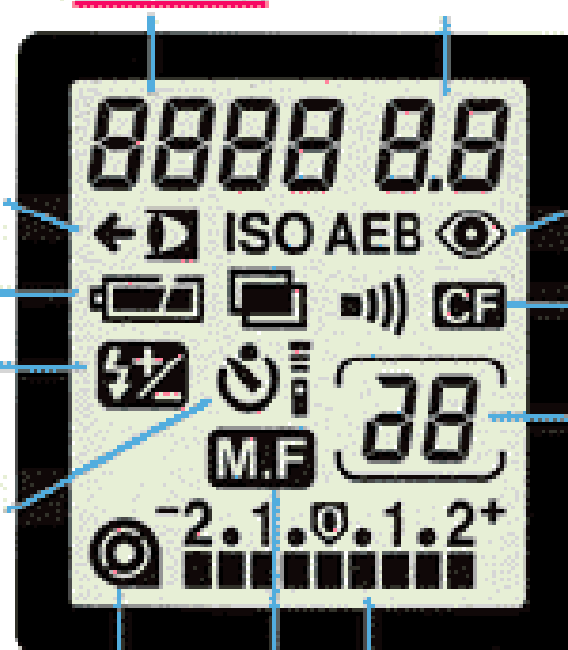


ISO symbol
 AEB symbol
 Red-eye reduction symbol
 Multiple exposure symbol
 Beeper symbol
 Custom function symbol
 Frame counter
 No. of multiple exposures
 set/remaining
 Self-timer countdown

Film status
 Manual focus symbol
 Film rewind indicator
 Exposure compensation amount
 Flash exposure compensation amount
 Metered manual exposure level
 AEB amount
 Red-eye reduction lamp on indicator


* EOS Elan IIE / EOS-55




5

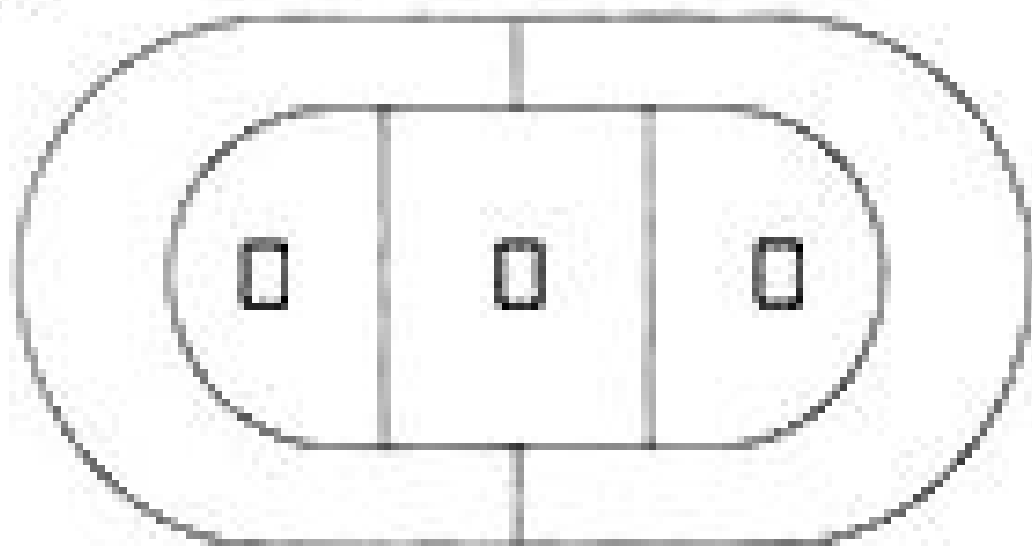



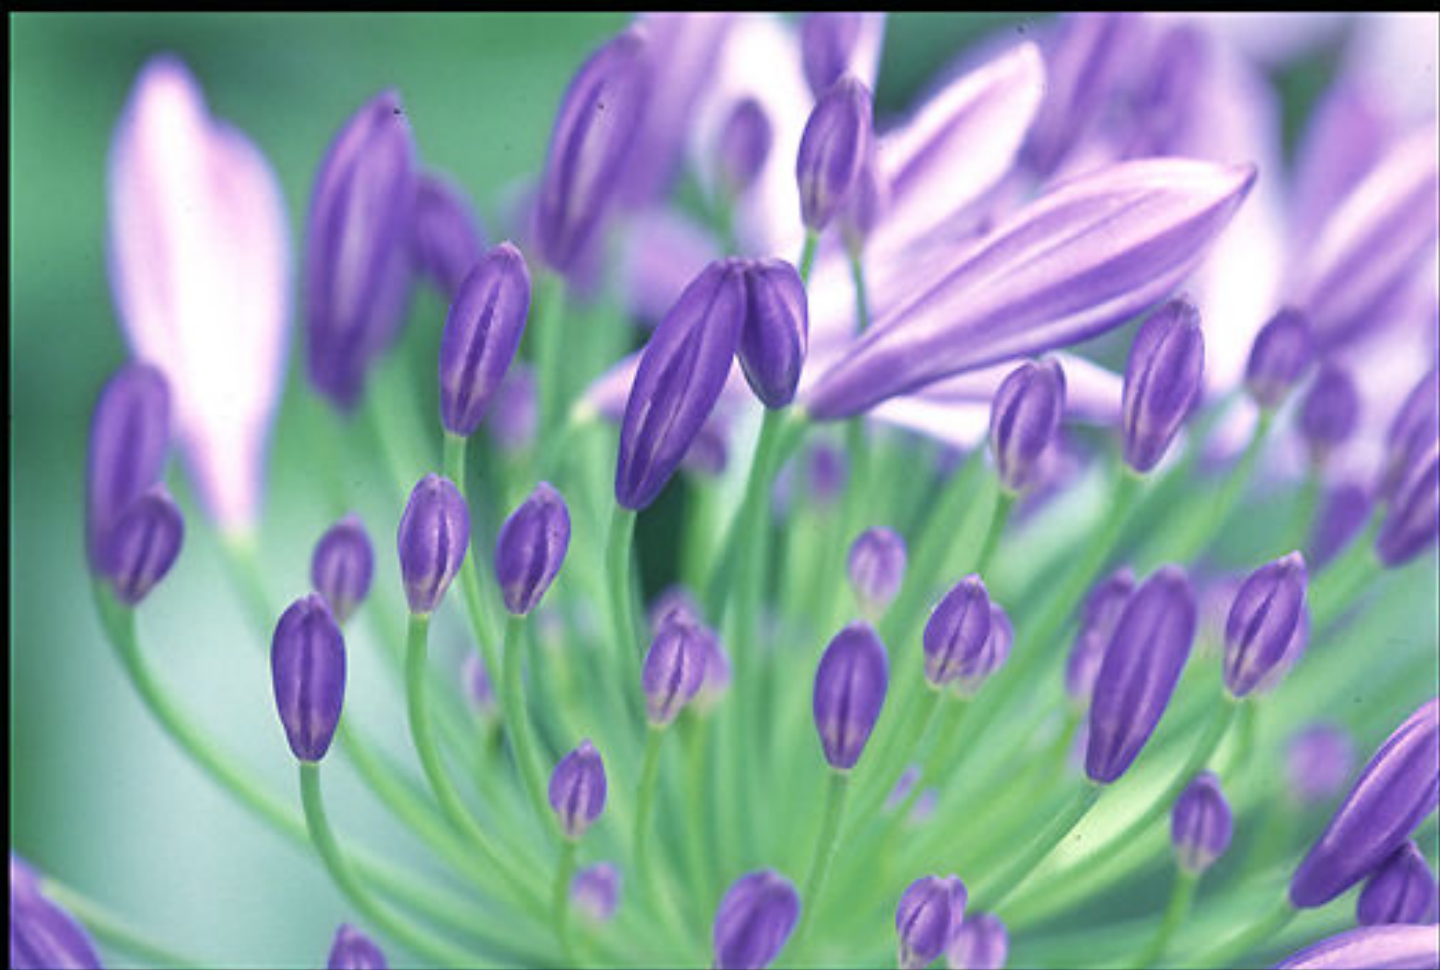

Canon EOS 50/50E

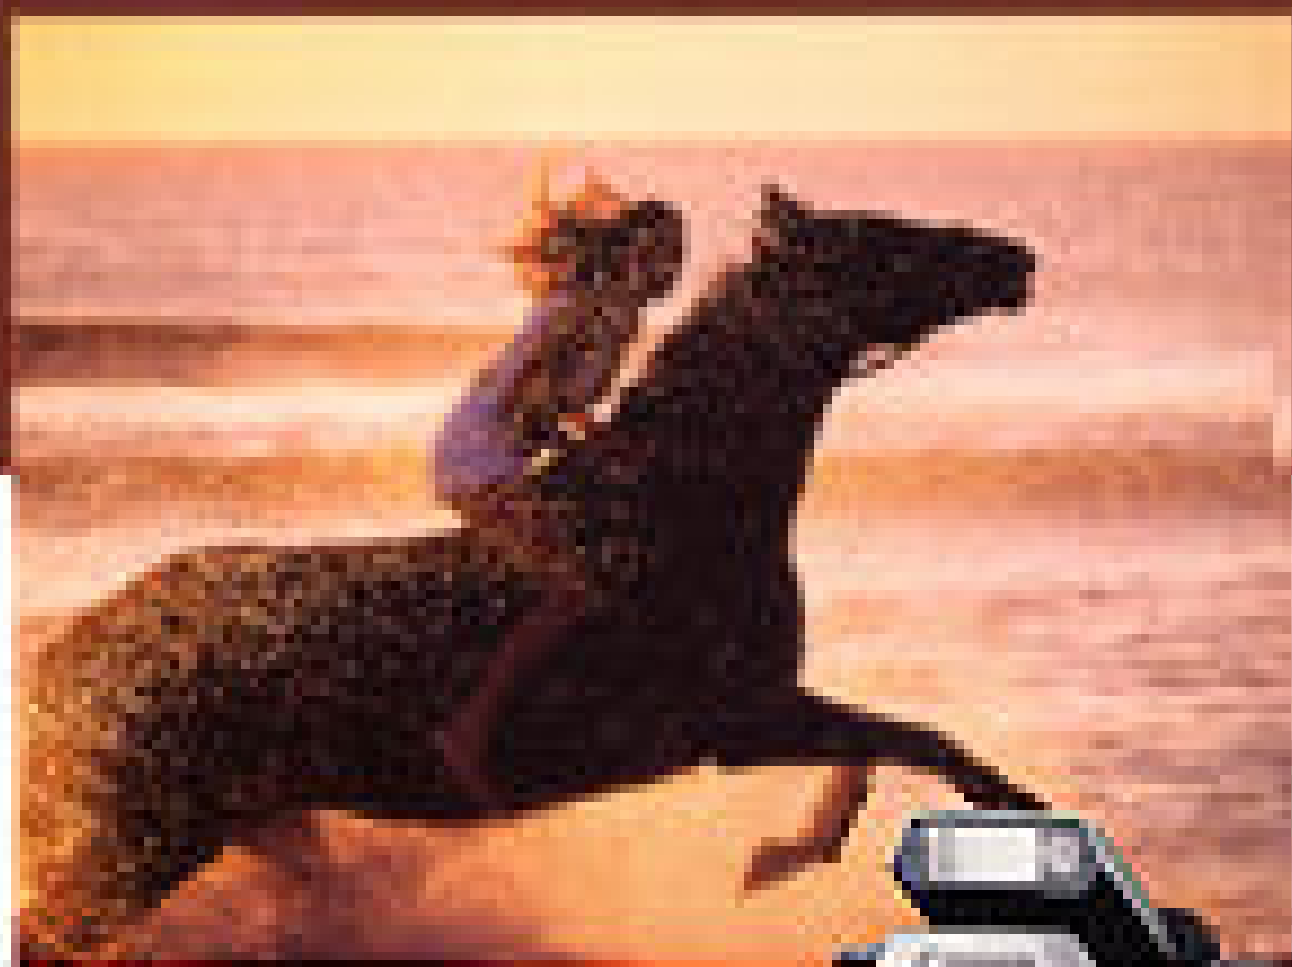

For photographers who know
what they want.












Partial Metering Reference Circle (9.5%)

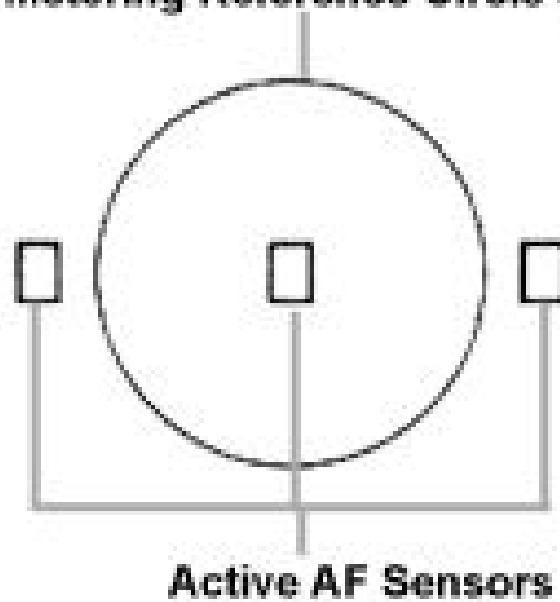

5m8888 8.80 • 0 2.1.1.1.2

— LCD Panels





Canon
EOS
500N



The new standard for
AF single-lens reflex cameras

















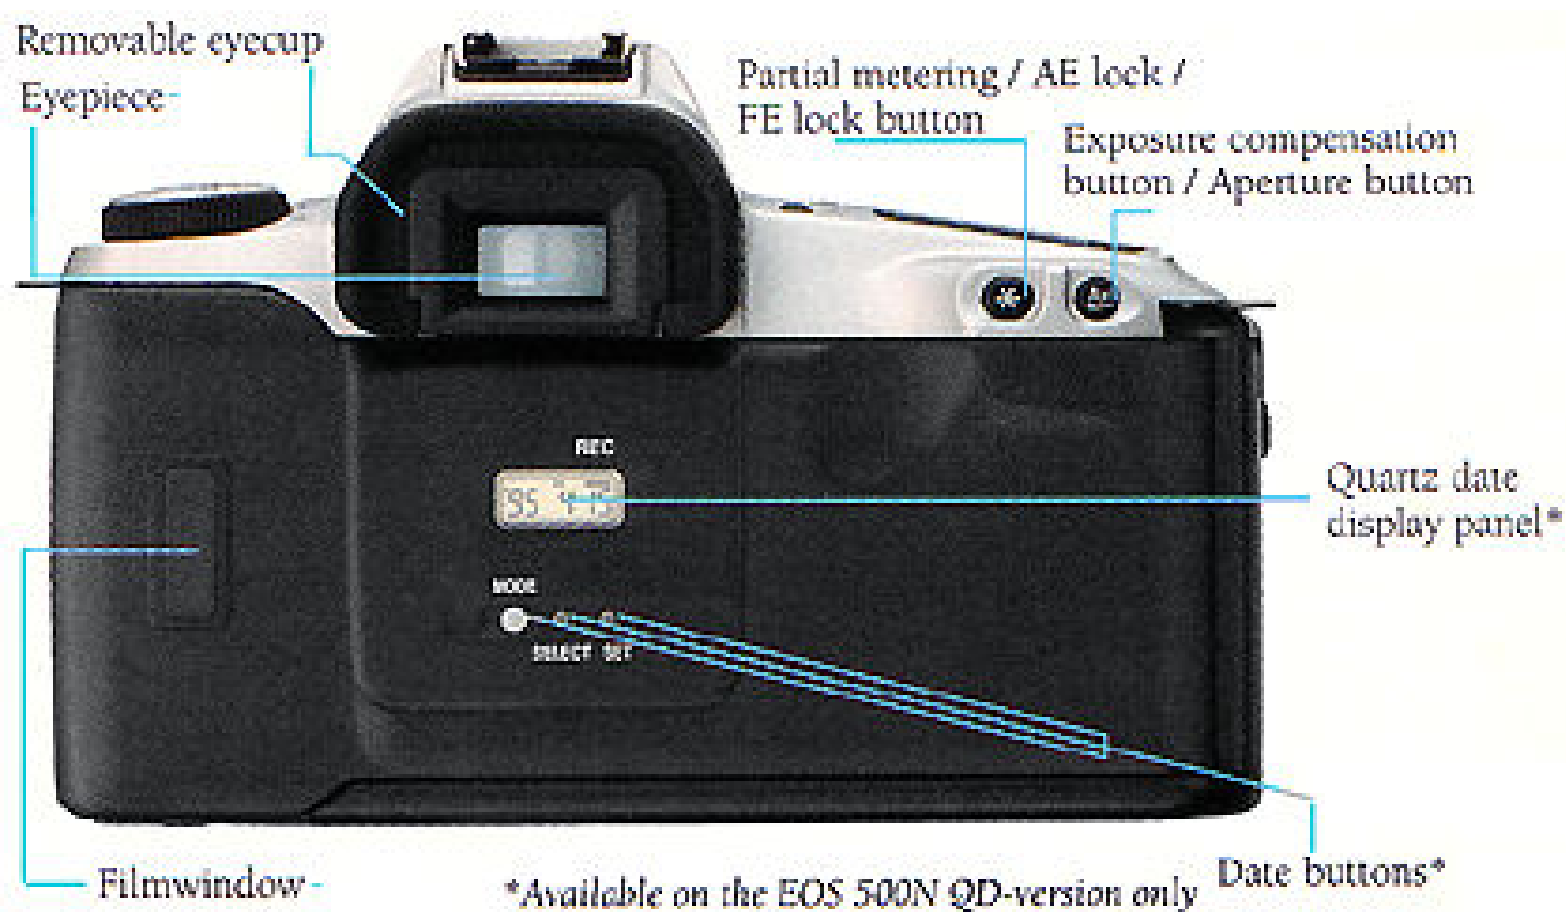





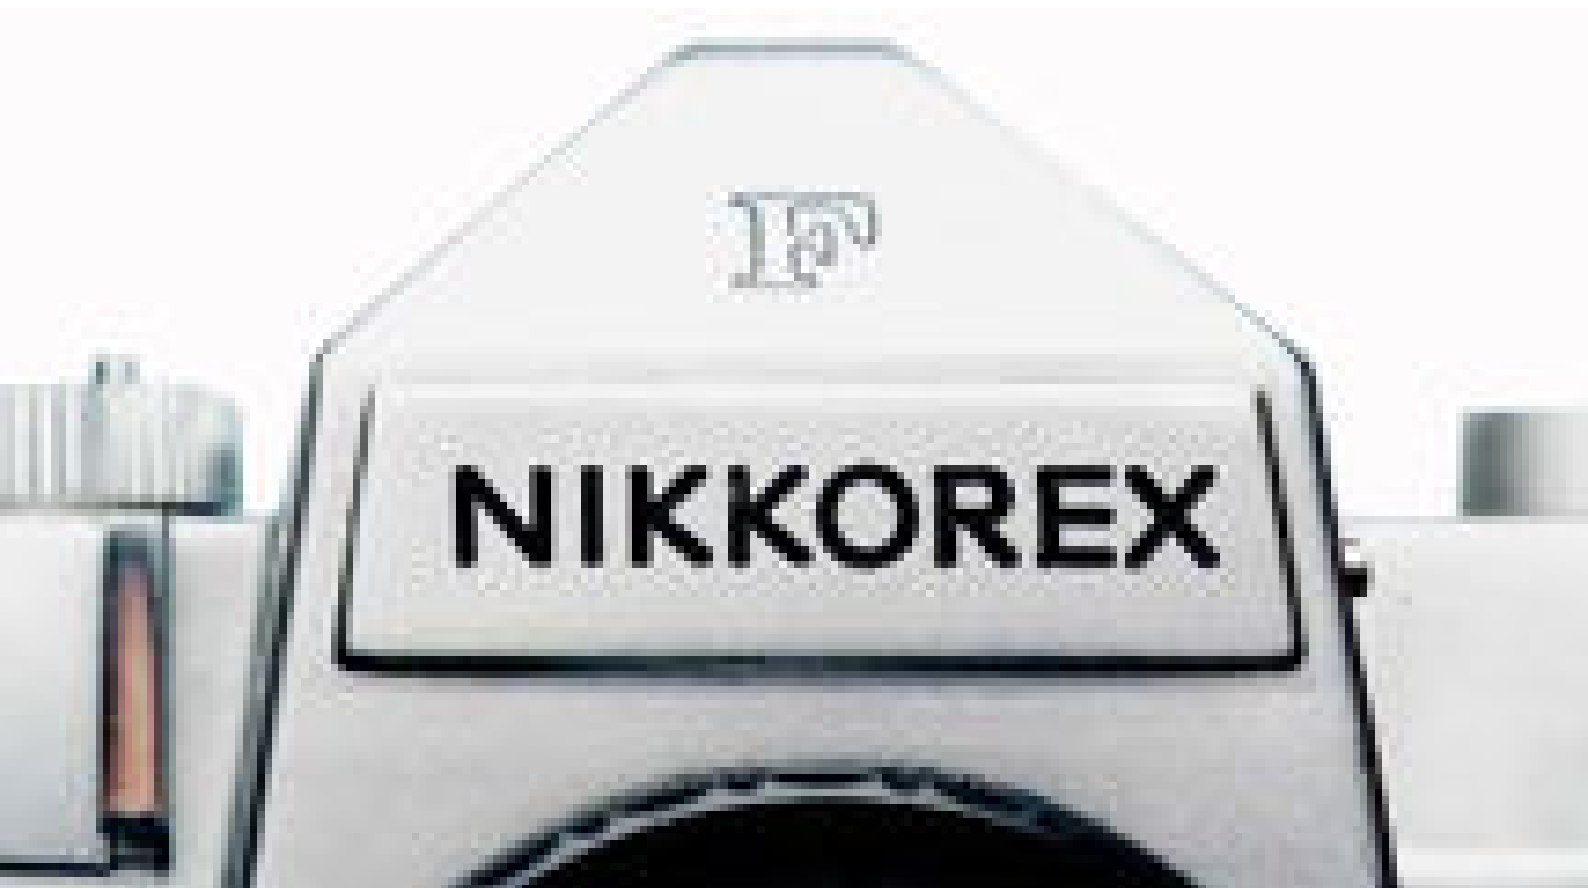













the Nikon F4P



Photo Credit: -

Arthur Wong

<artstraagency@netvigator.com>



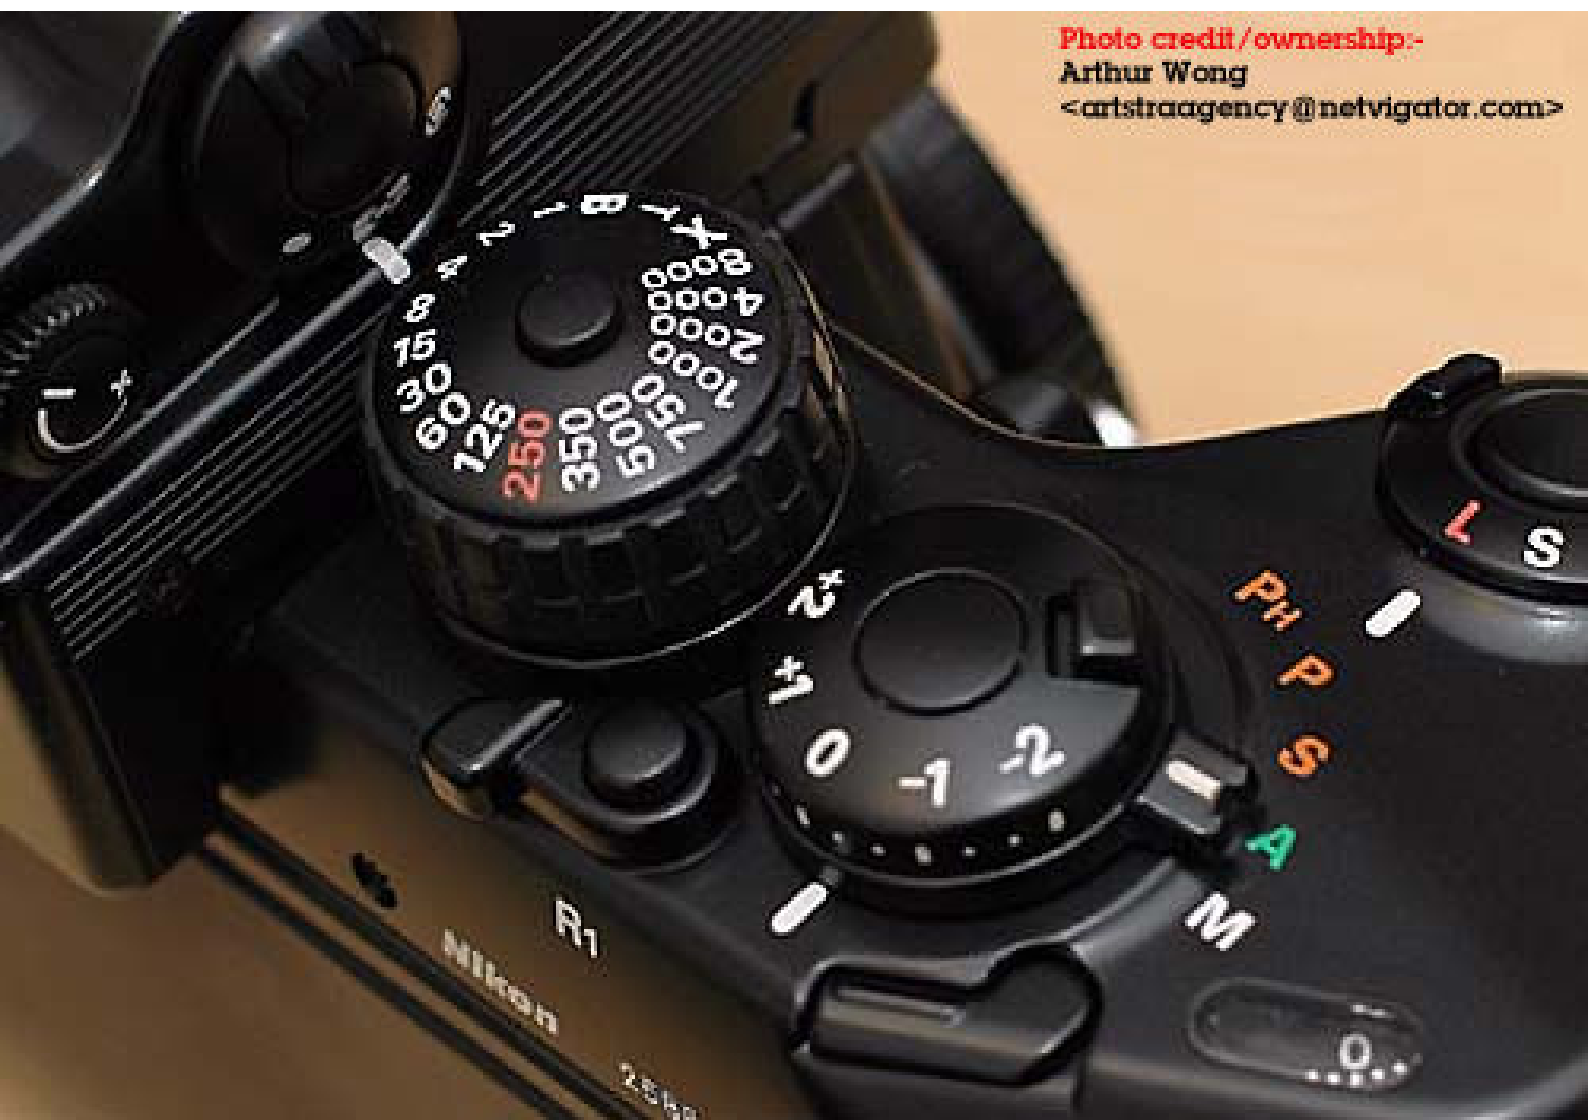


Photo credit/ownership:-
Arthur Wong
<artstraagency@netvigator.com>

Photo Credit: -

Arthur Wong

<artstraagency@netvigator.com>





Photo Credit: -
Arthur Wong



Photo Credit: -
Arthur Wong
<artstraagency@netvigator.com>





Photo Credit:
Arthur Wong

Photo Credit: -
Arthur Wong



Photo Credit: -

Arthur Wong

<artstraagency@netvigator.com>











Aperture window


5.6

A
2000
1000
500
250
125
X
60
30
15
8
4
2
1
1/2
1/4
1/8
LTB

Exposure compensation warning
Over exposure warning
Shutter speed index
Auto Flash
Exposure check
Ready light
Slow shutter speed warning
Long exposure warning & Bulb Indication






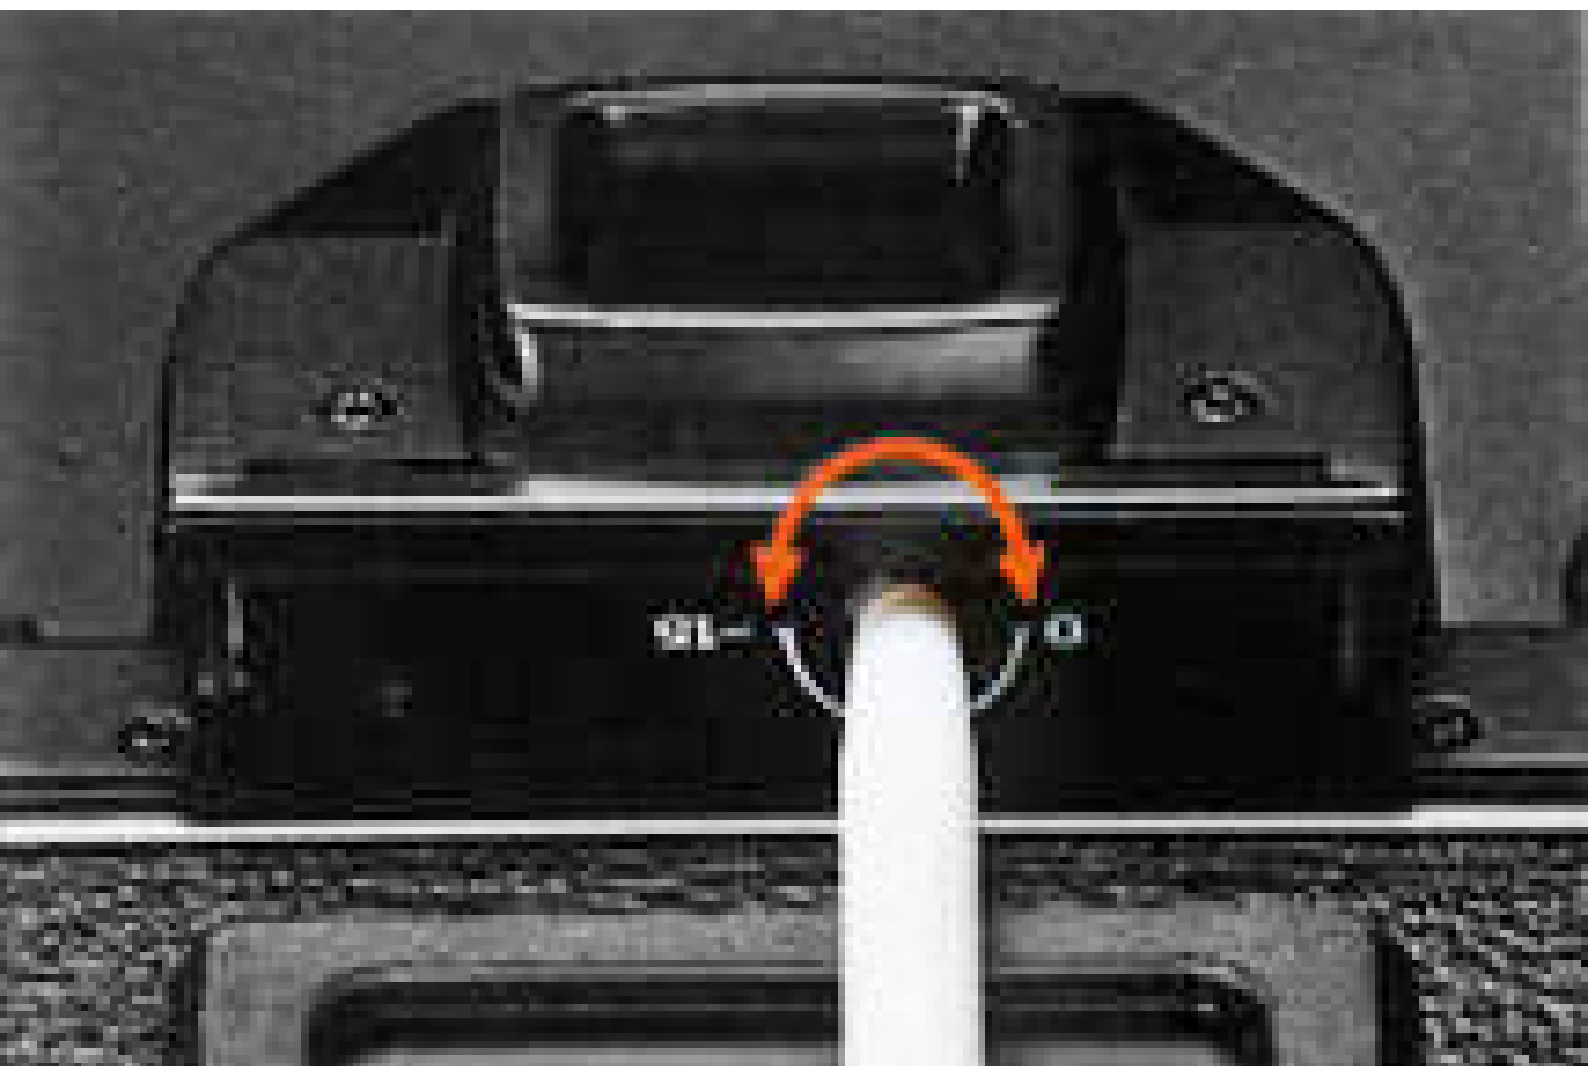






EOS・DCS

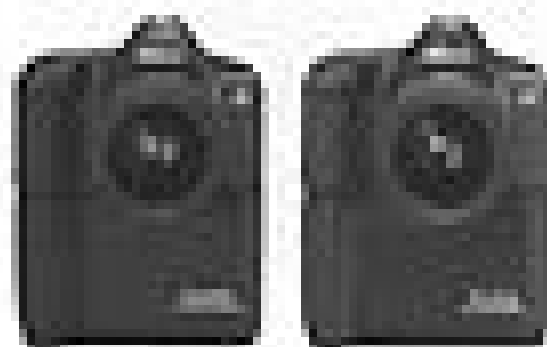
[illegible]



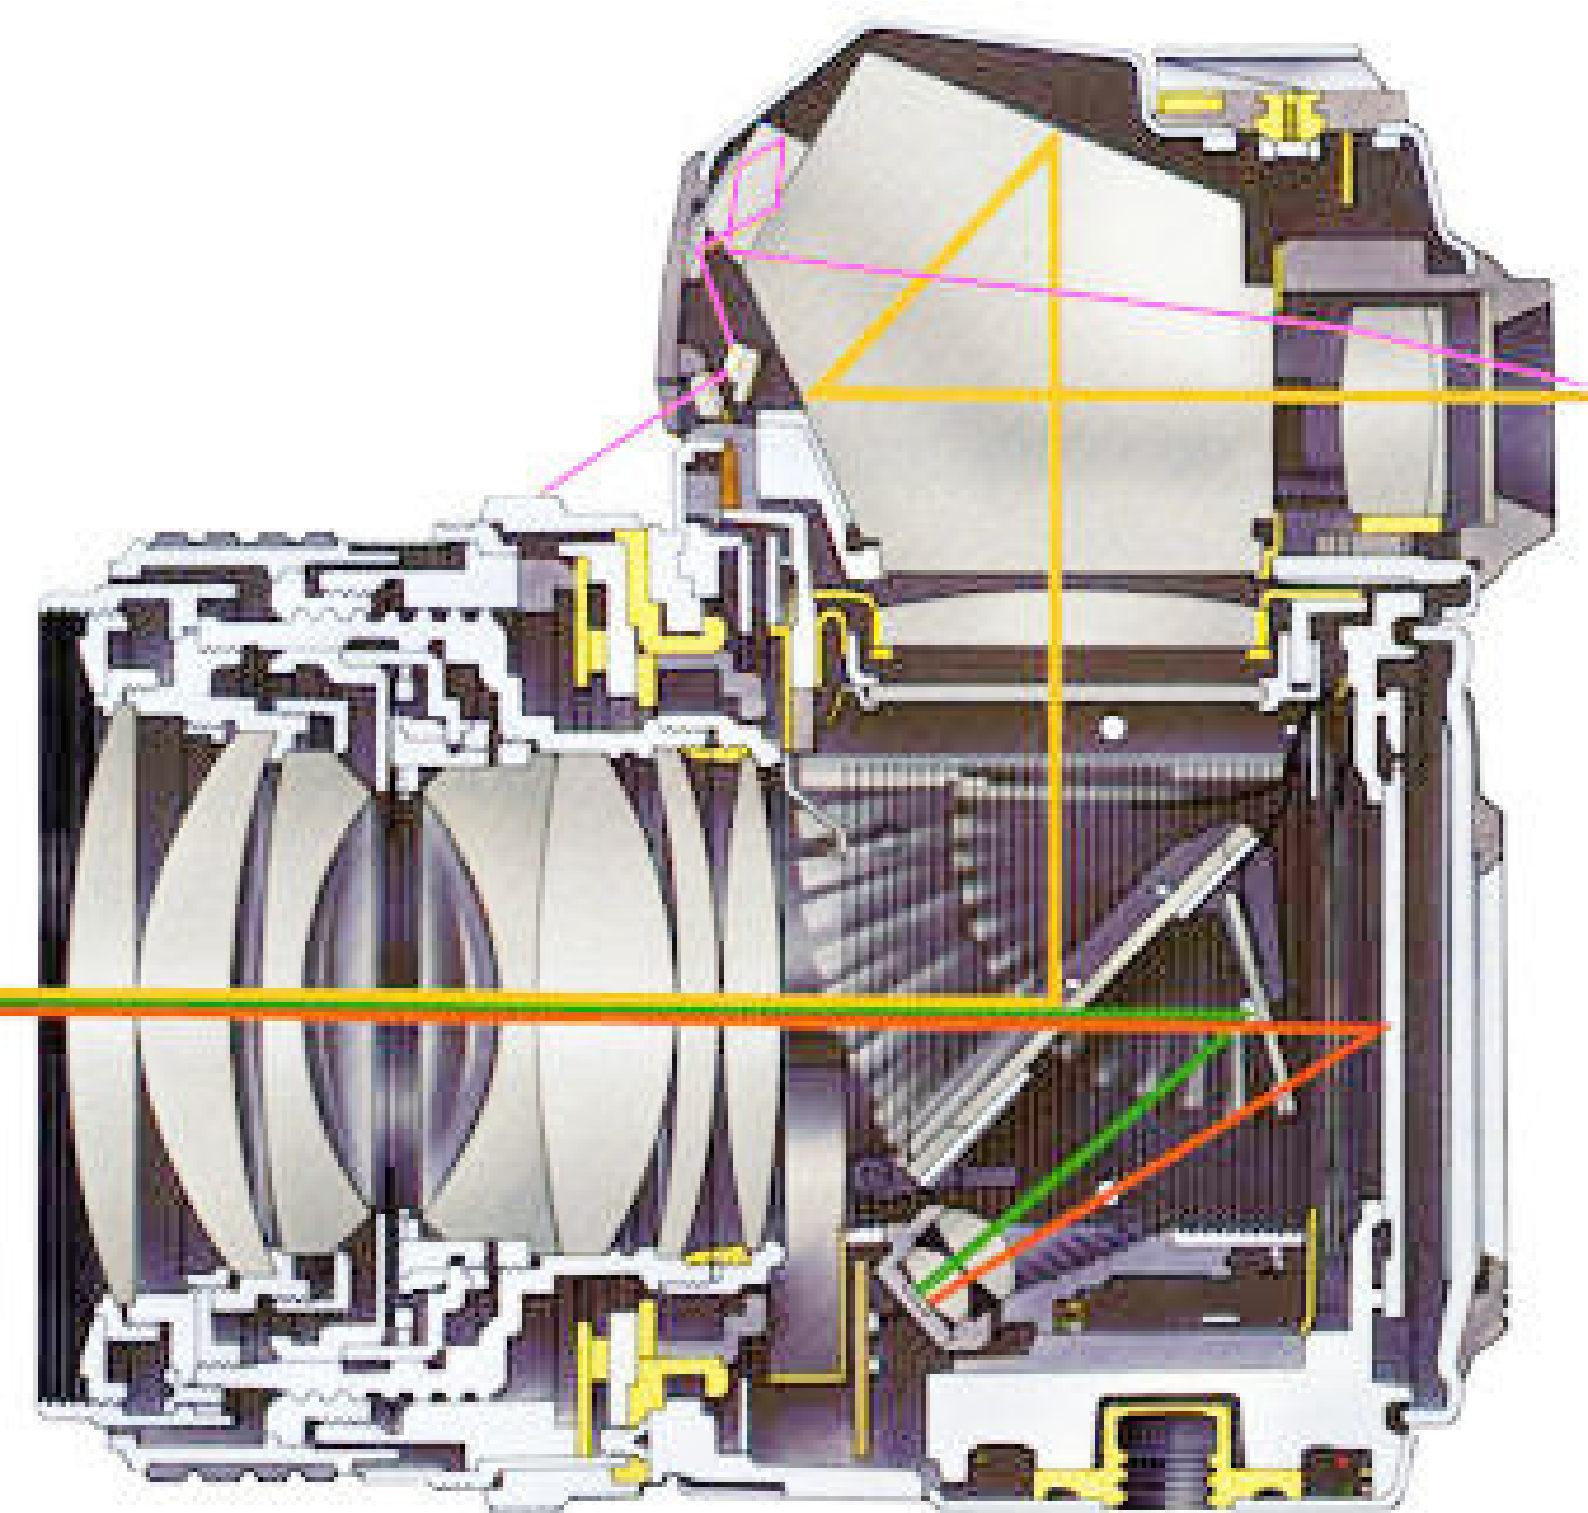




5.6



A
2000
1000
500
250
125
X
50
25
13
6
2
mm
2x
4x
6x
170












FP-Sync Terminal

X-Sync Terminal

Dedicated Flash
info Terminal

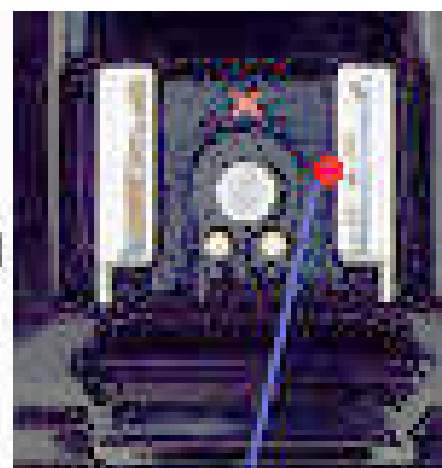



Hot Shoe







A
 2000
 1000
 500
 250
 125
 X
 60
 30
 15
 8
 4
 2
 1
 2s
 4s
 LT.B



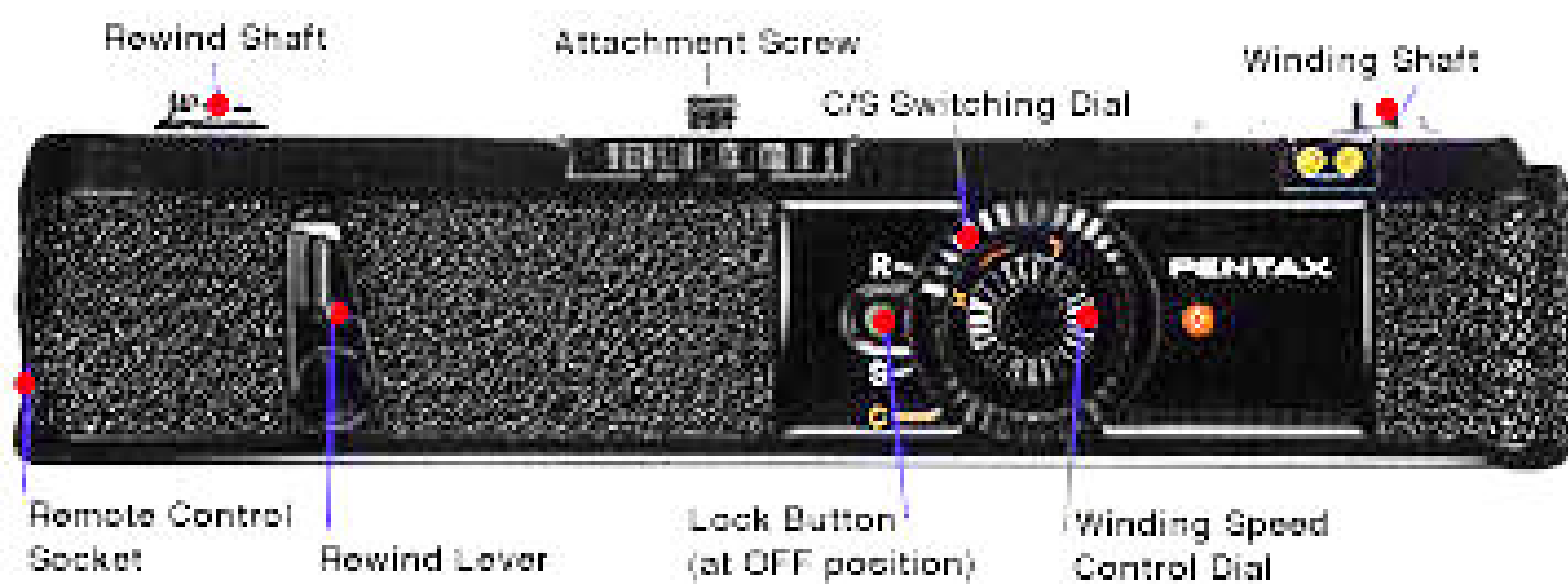



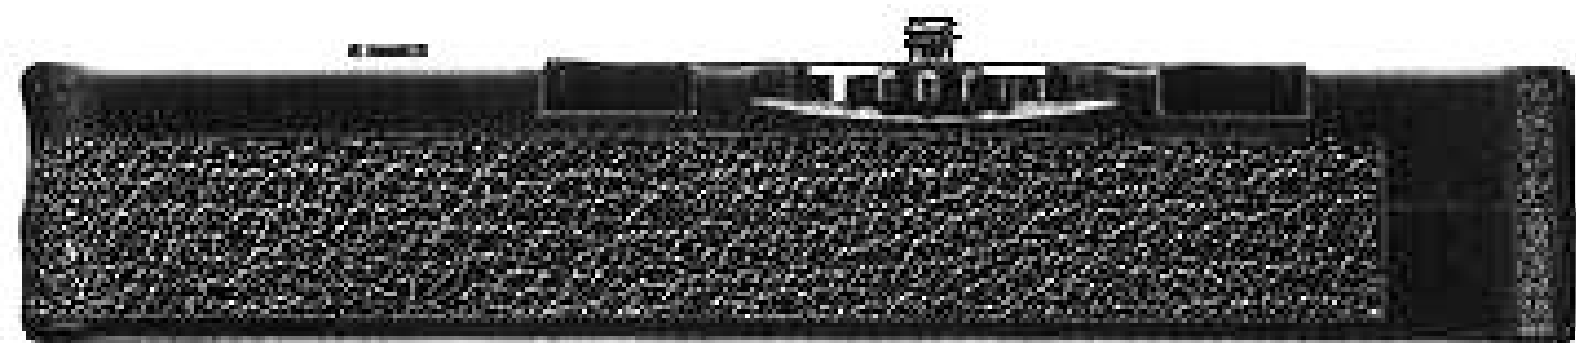

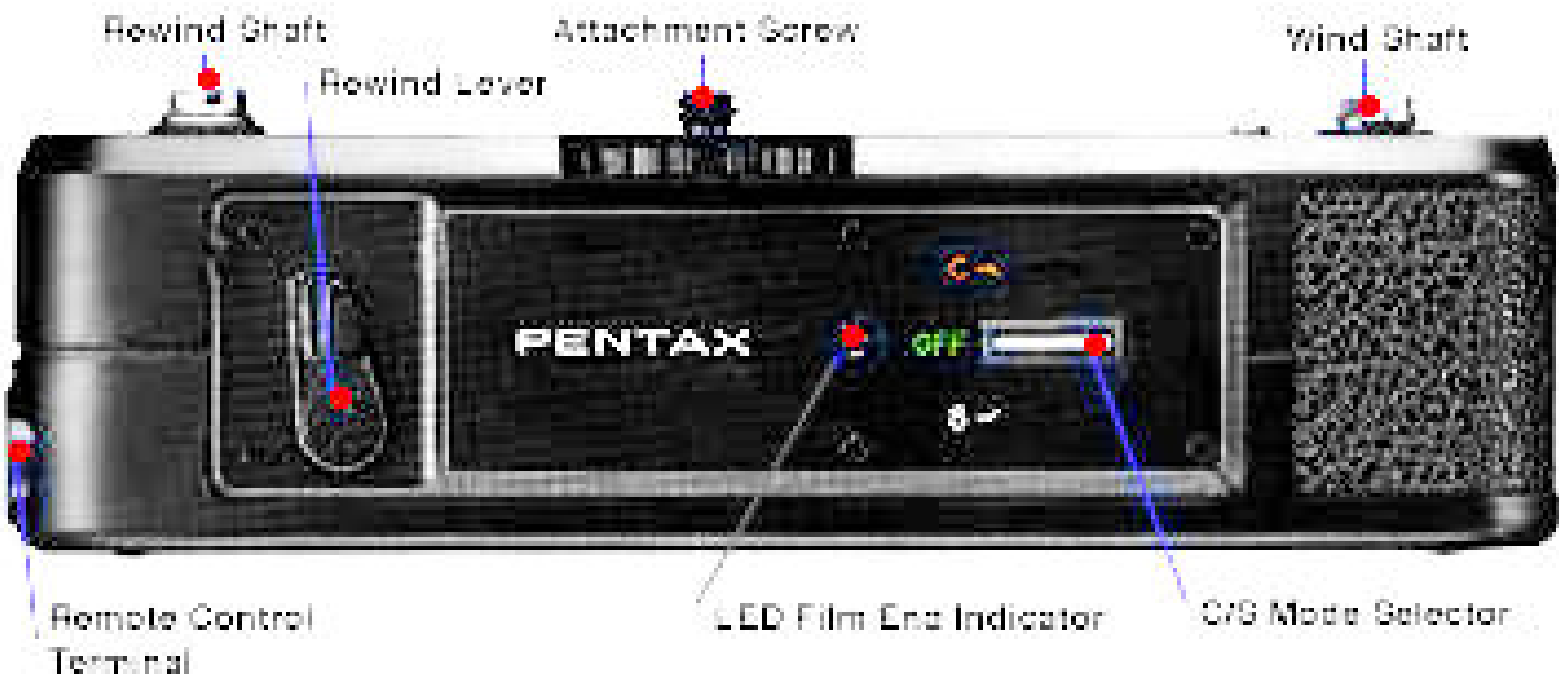

Rewind Shaft

Attachment Screw

Wind Shaft

Rewind Lever

Remote Control
Terminal

LED Film End Indicator


C/S Mode Selector



Canon

EOS-1c

CANON PROFESSIONAL DIGITAL CAMERA EOS D2000

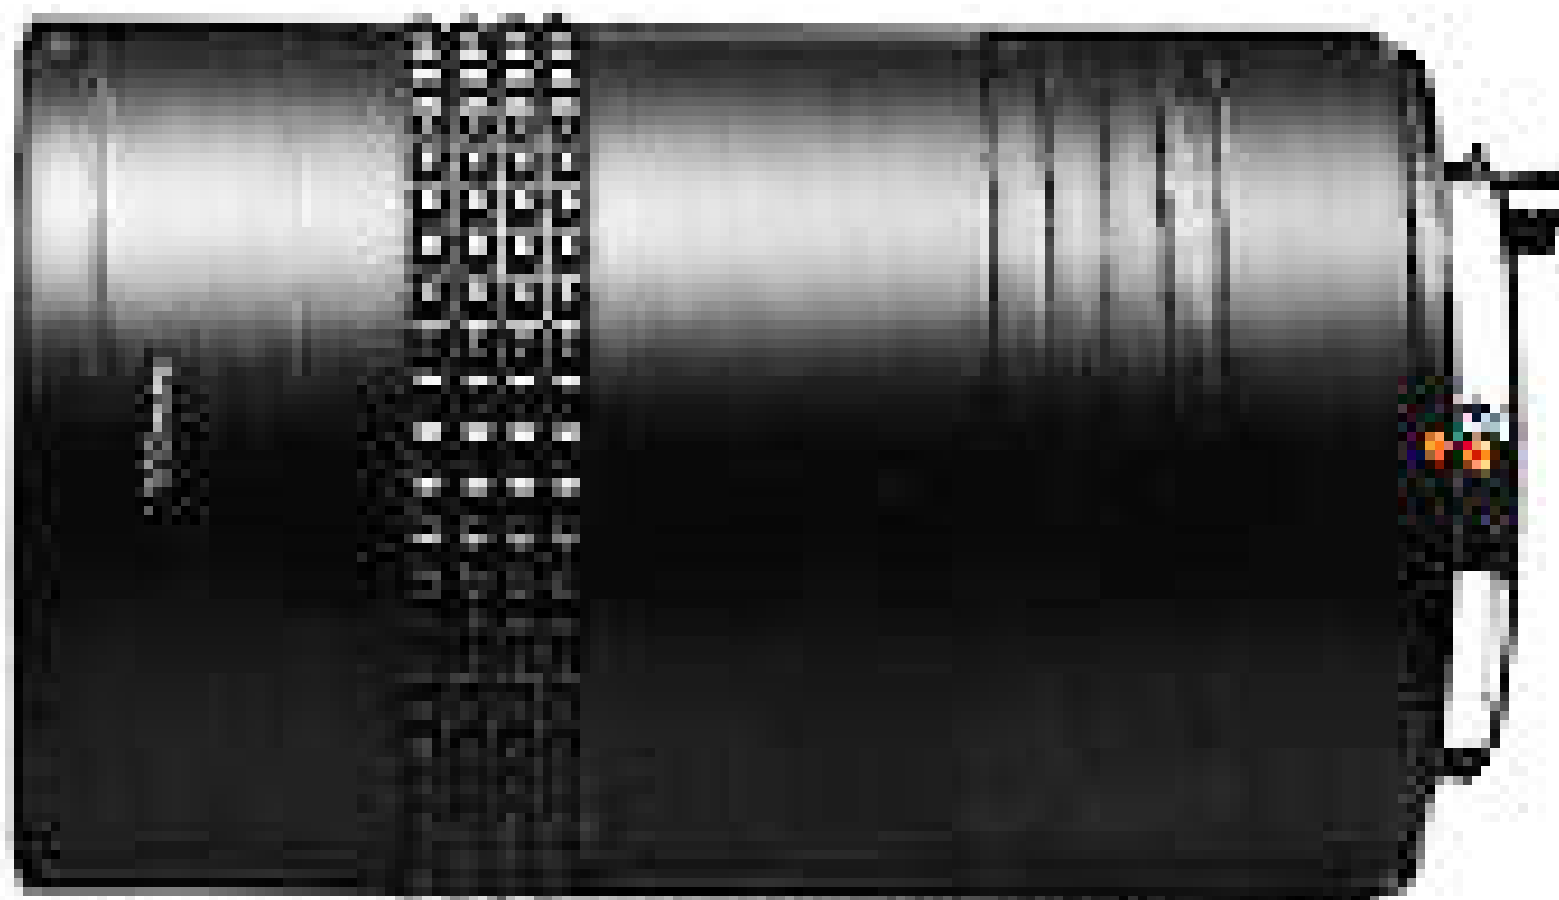


• Auto Extension Tube K 100mm





■ Auto Extension Tube Sol K

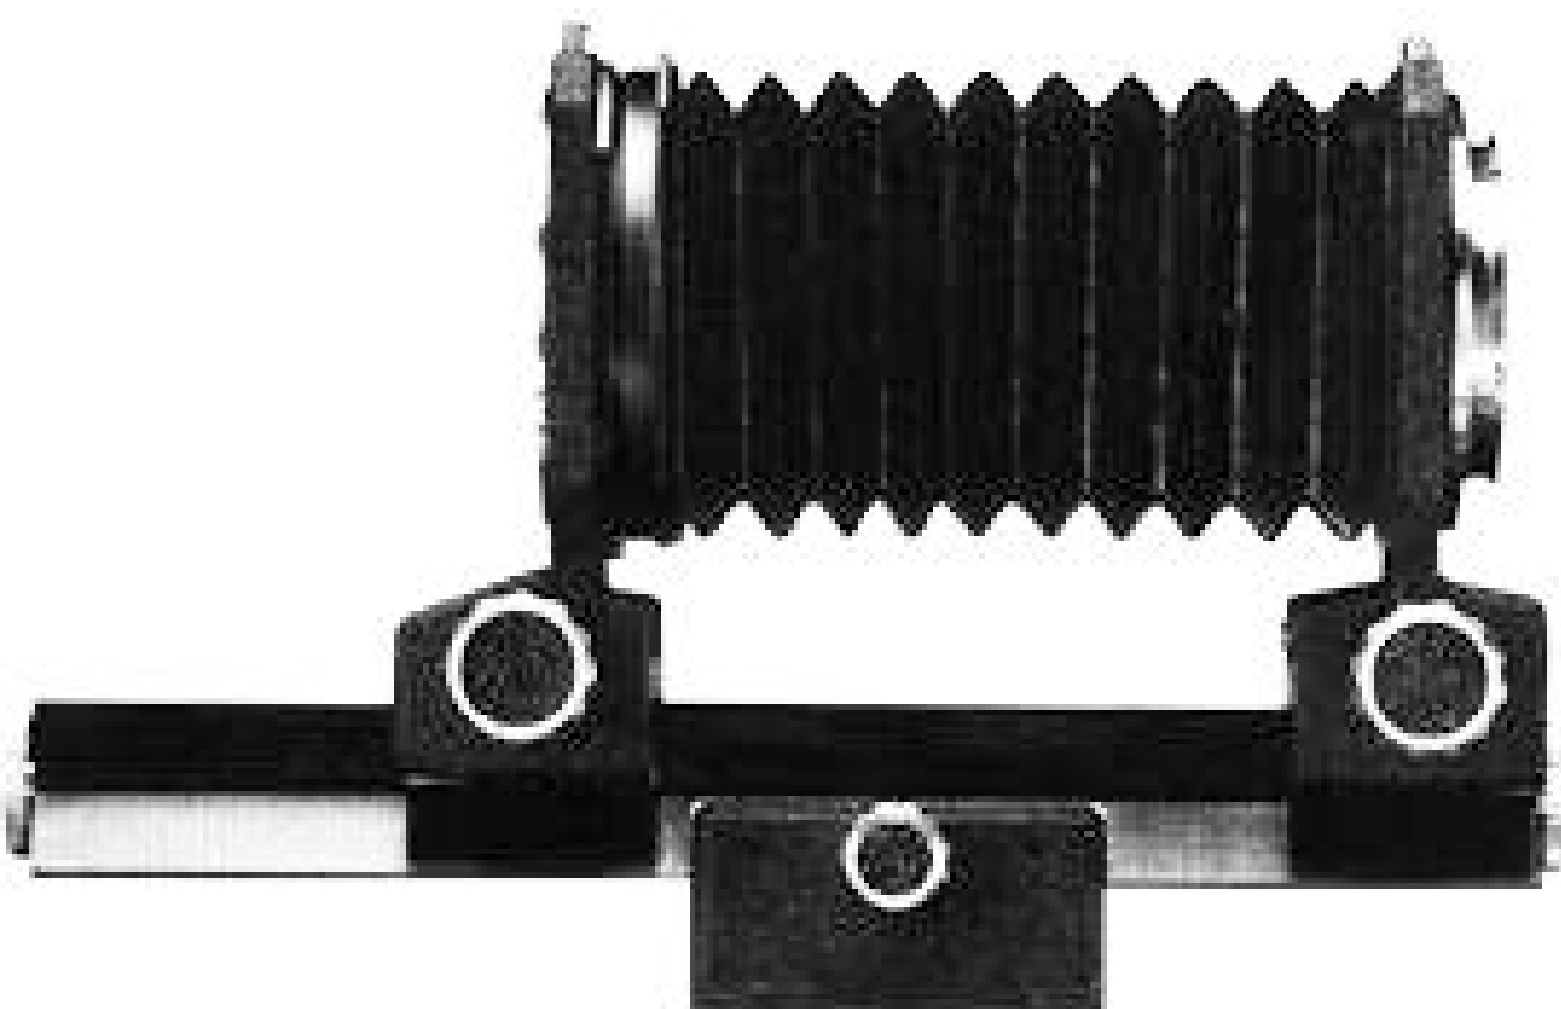



• Slide Copier A

IEEE 1394
(Firewire)
Connection

A

AC Adapter
Connection

B

White Balance
Sensor *

C

D

G


Vertical
Control
Switch

E

Vertical
Shutter
Release

Canon
Remote
Port

F

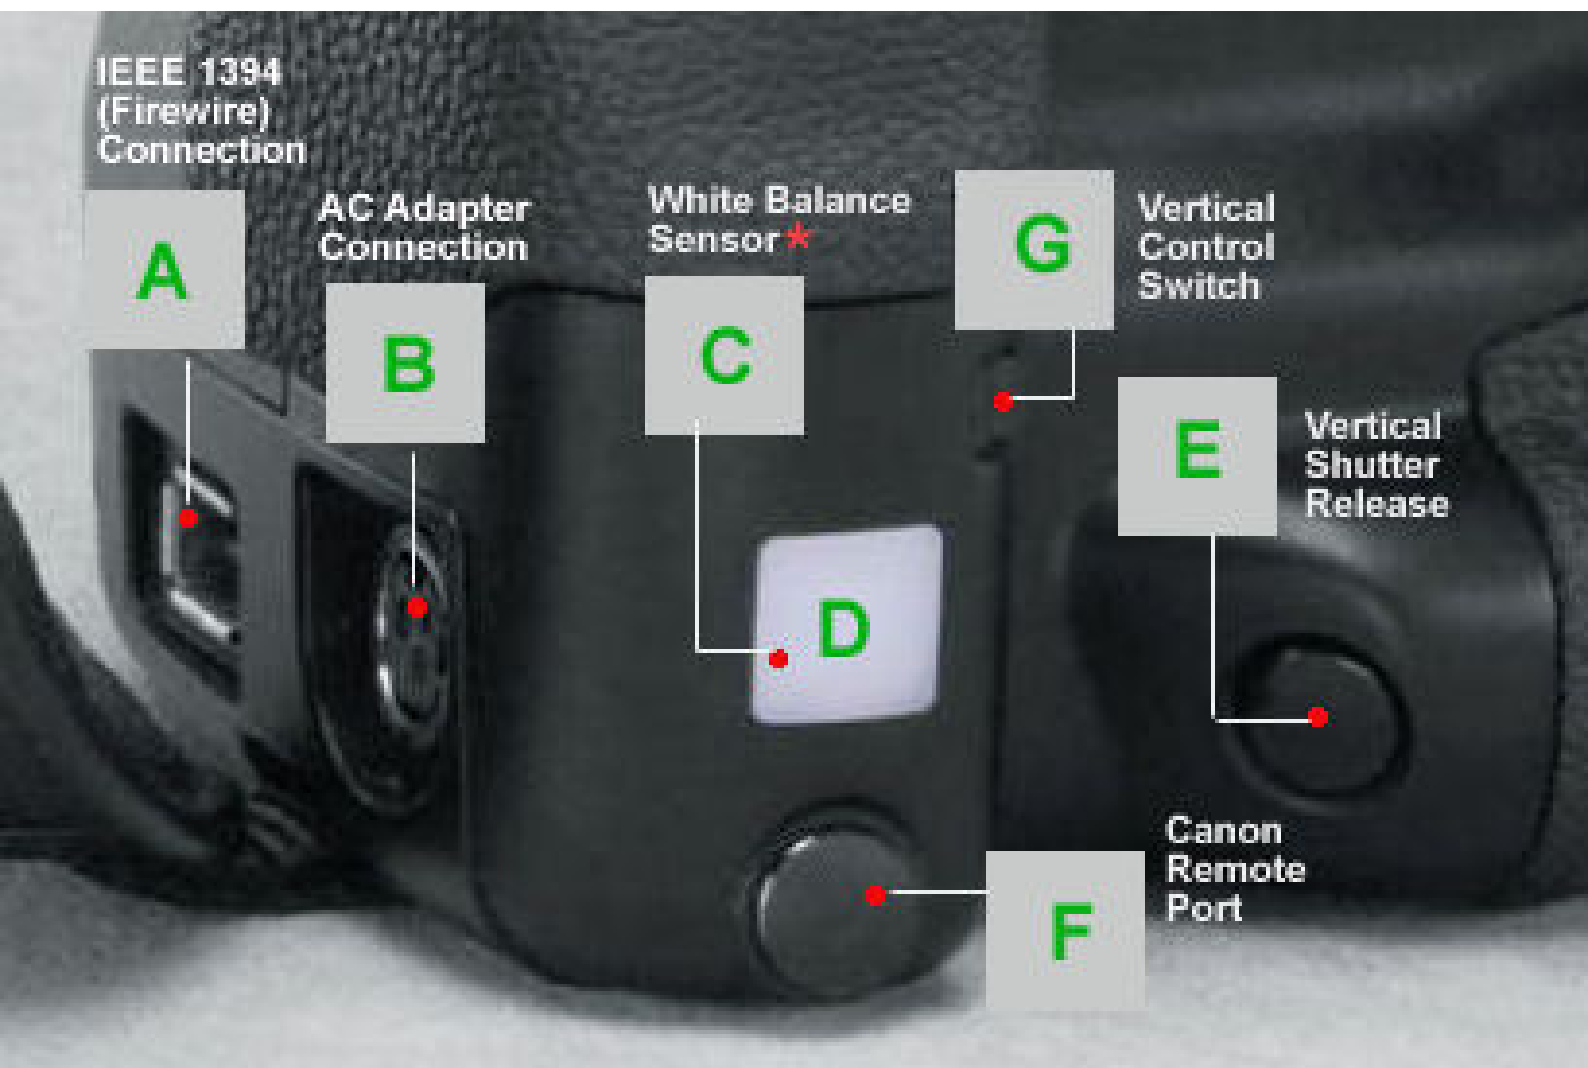

32121511 054







