









MF-4

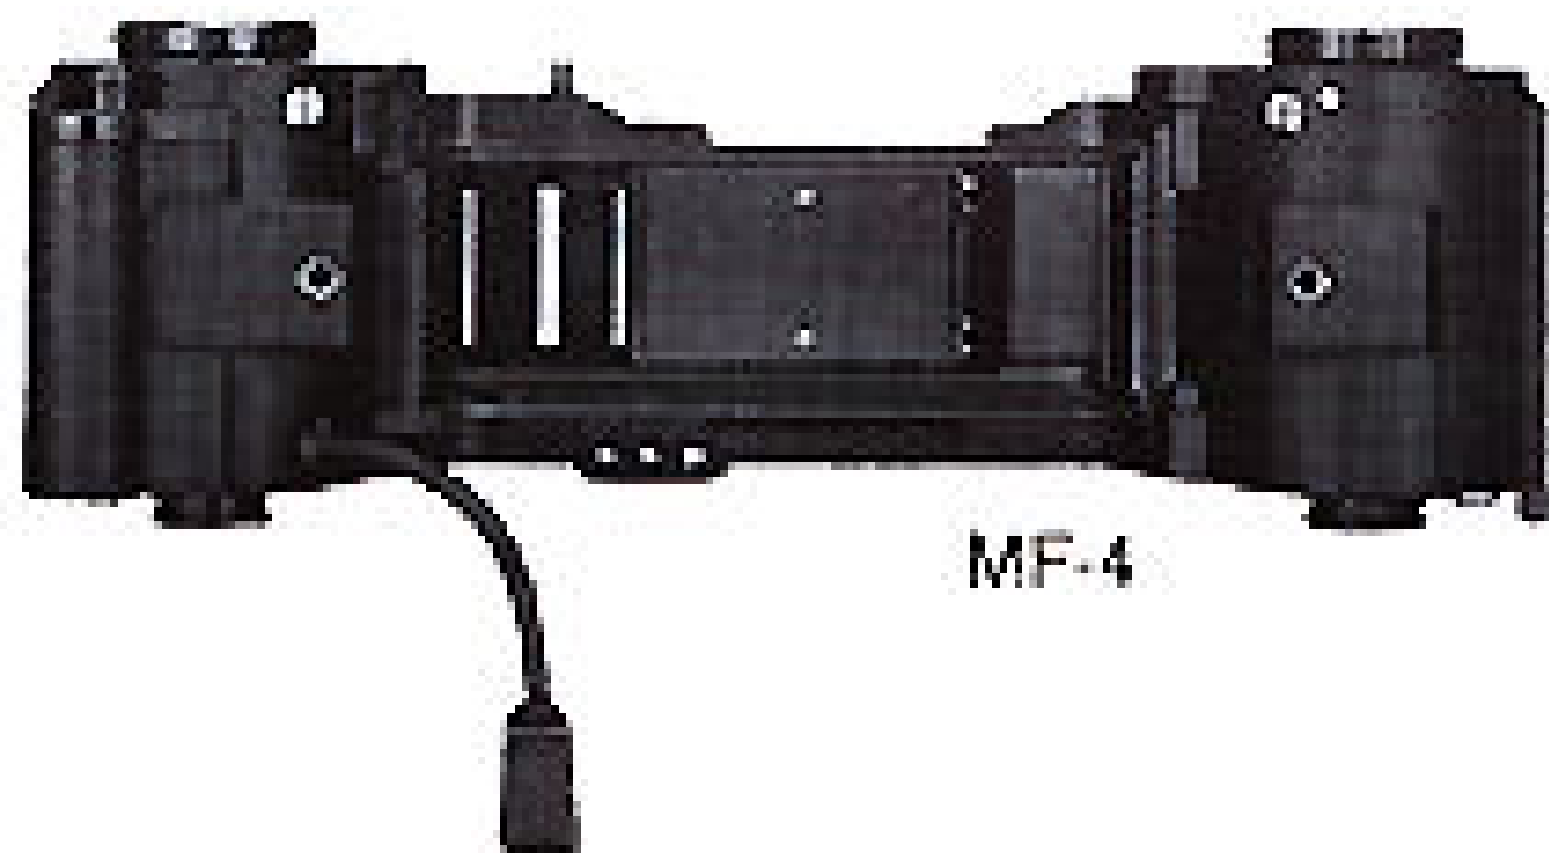




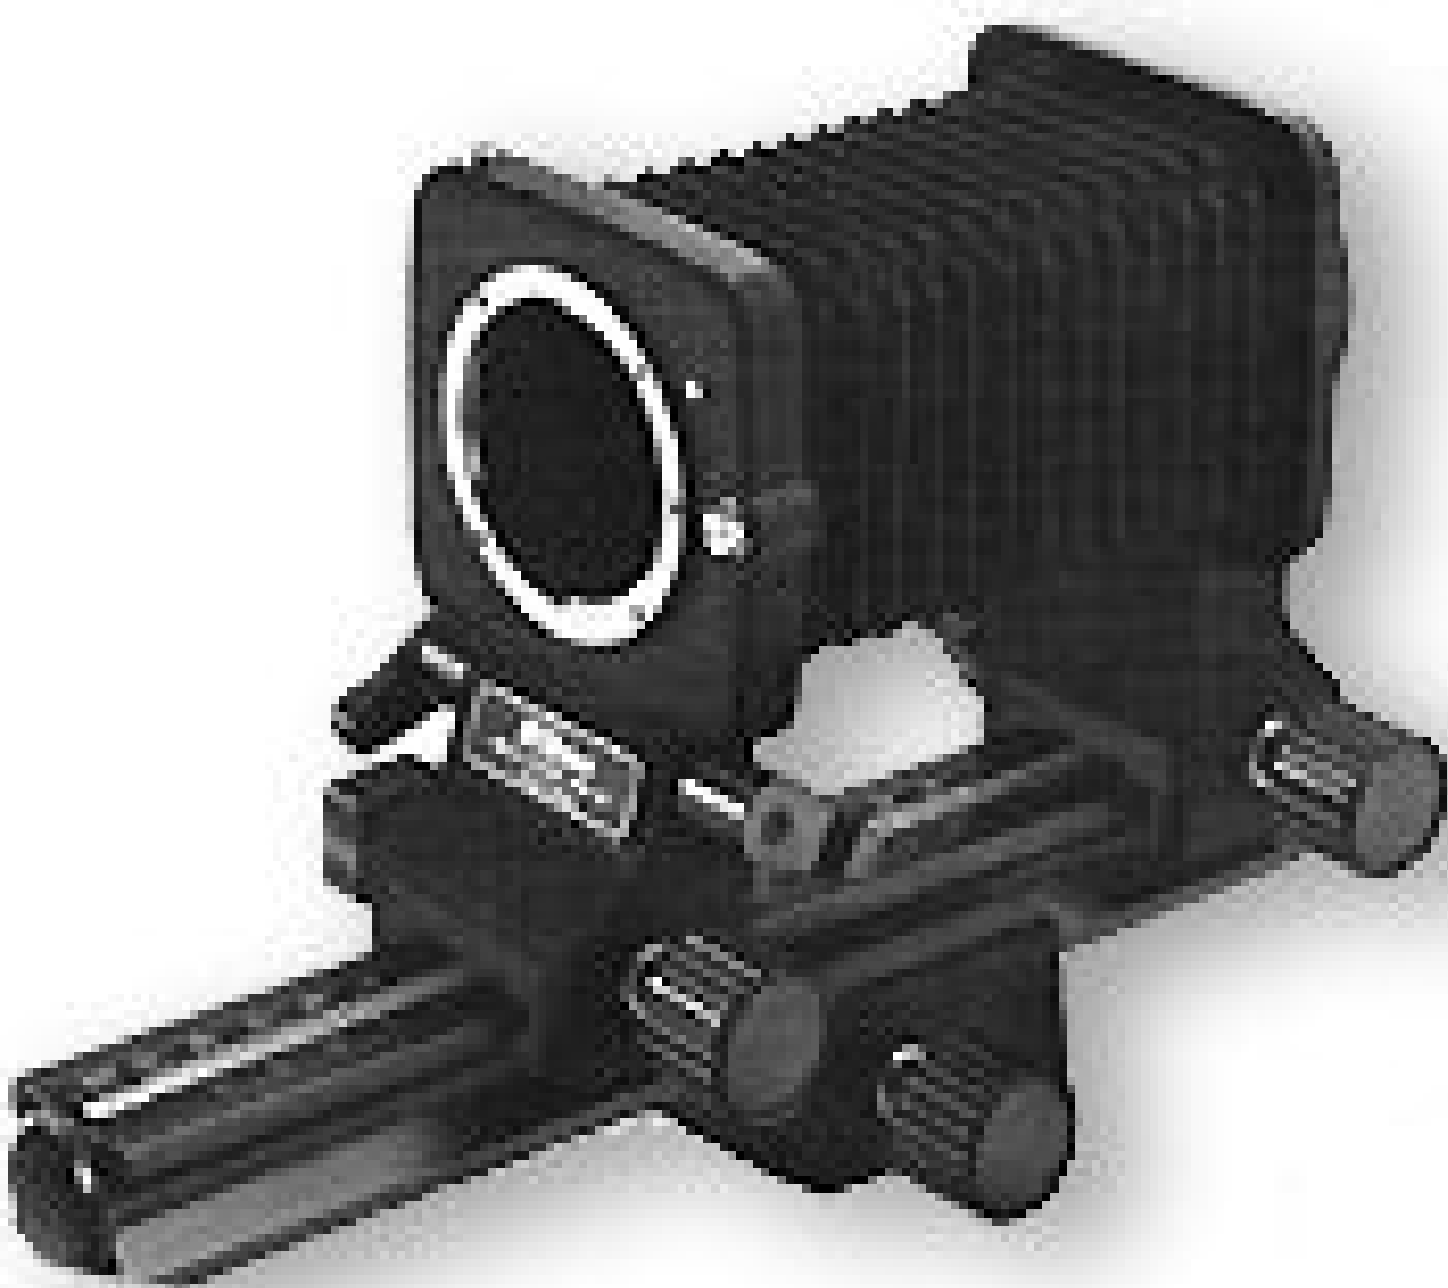





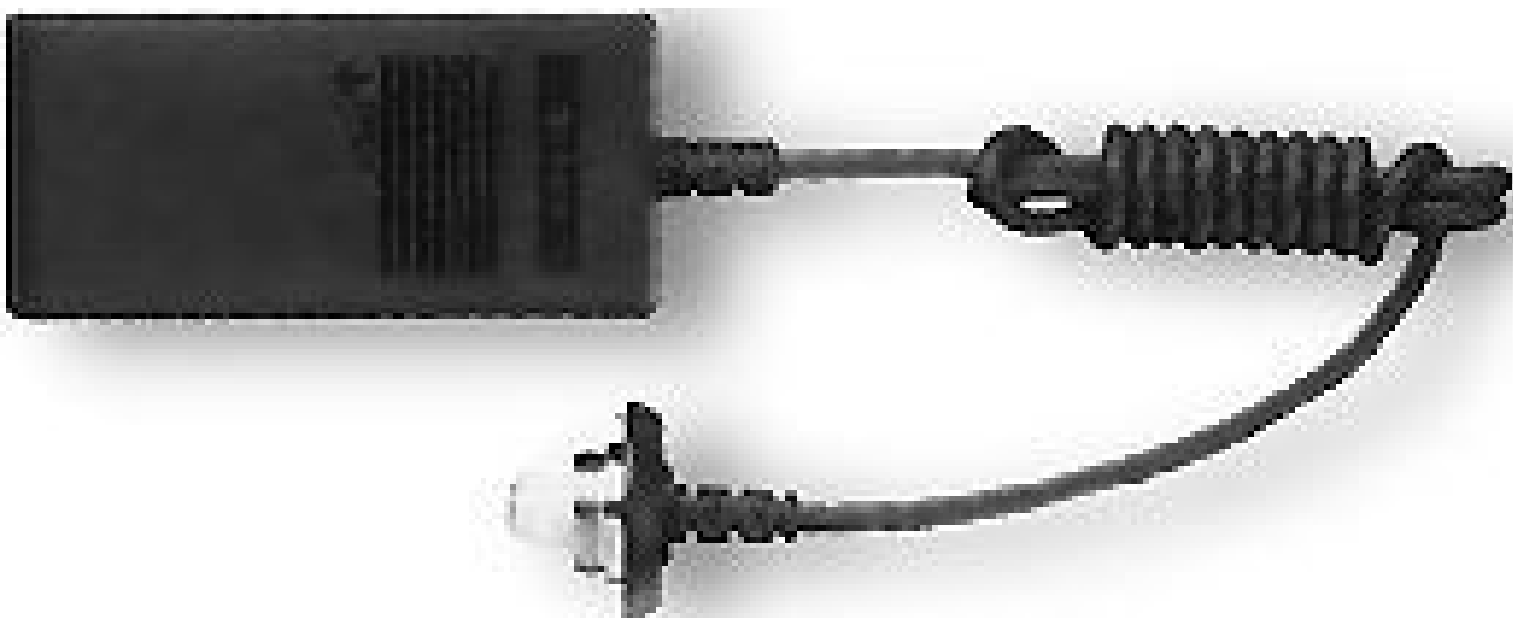







Lens type signal pin





Focus lock button


ON/OFF switch

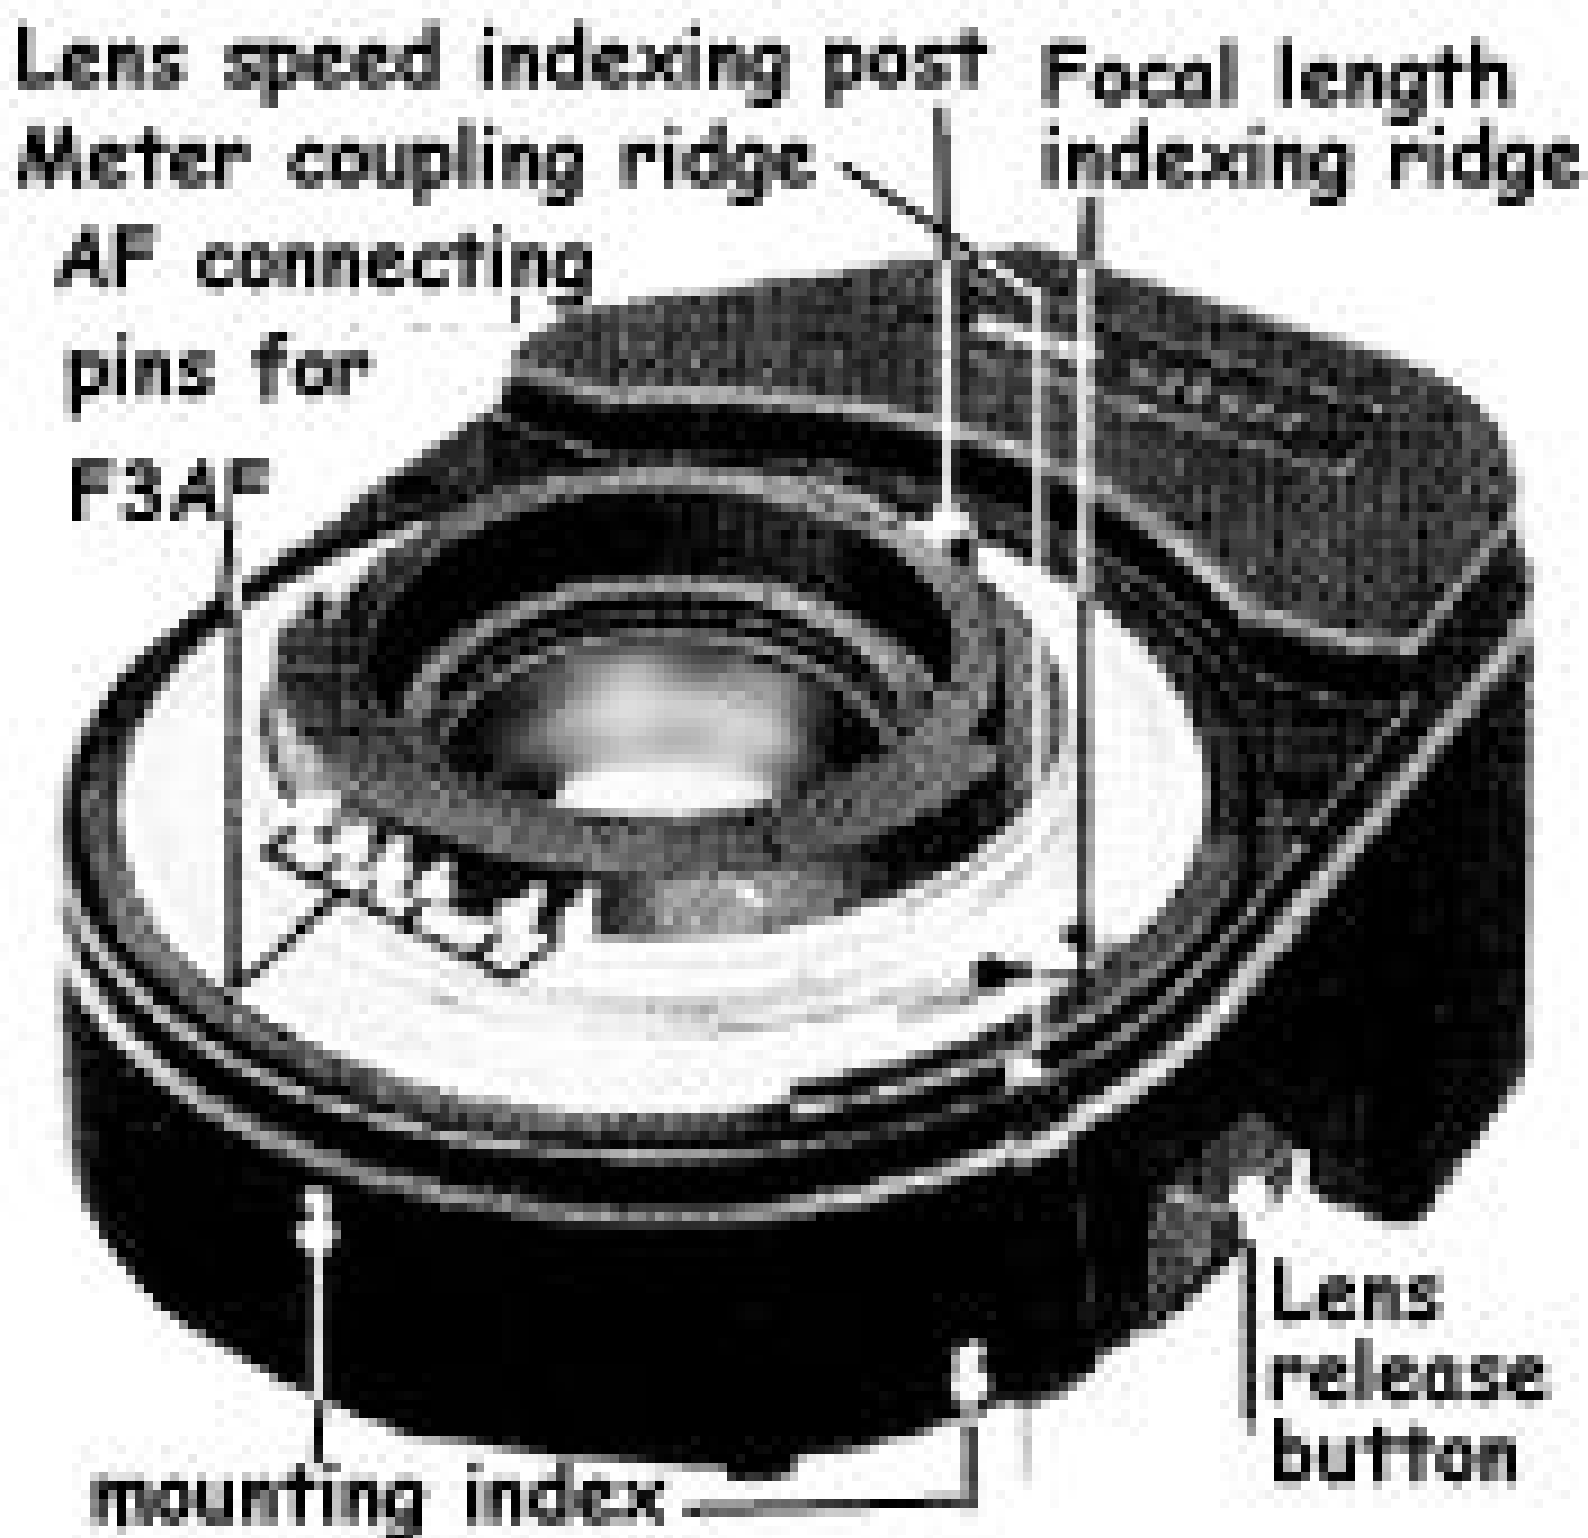


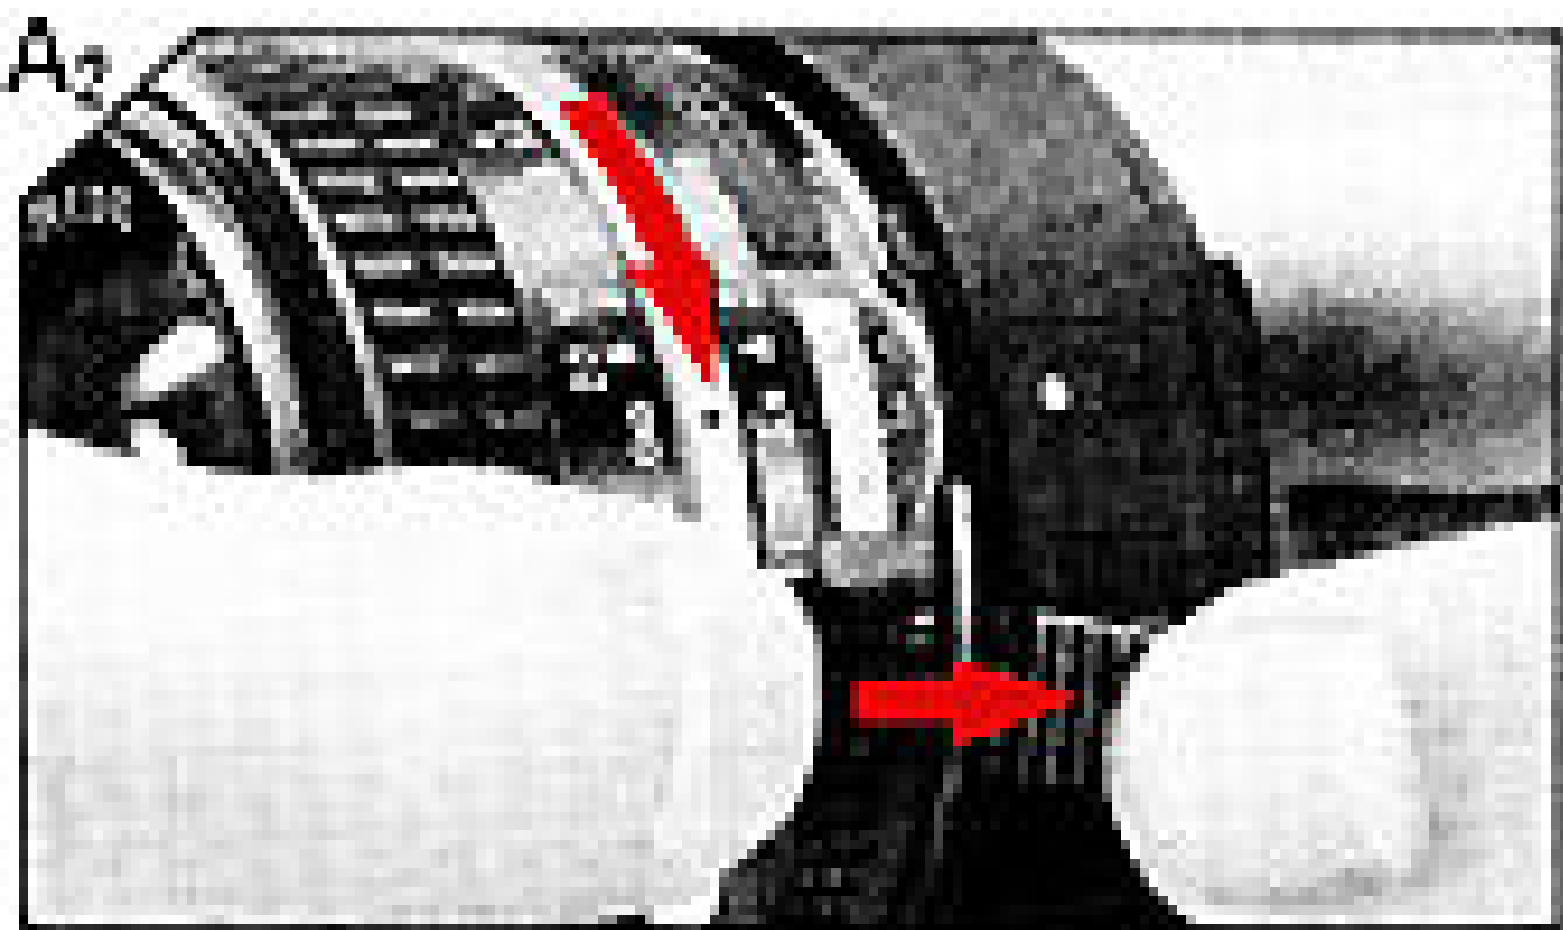

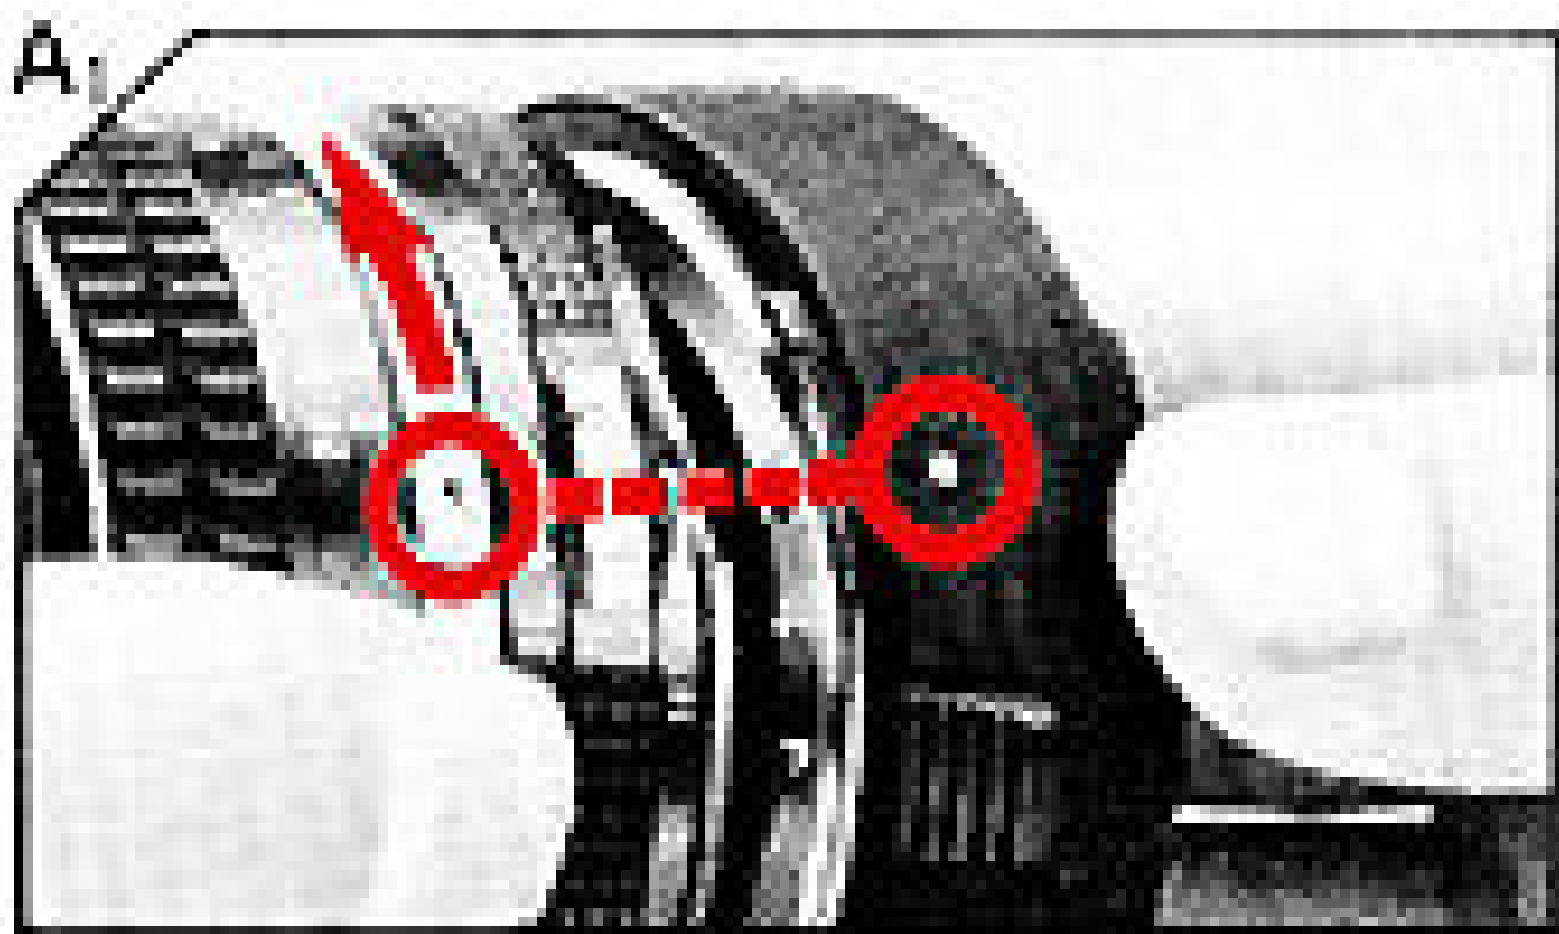

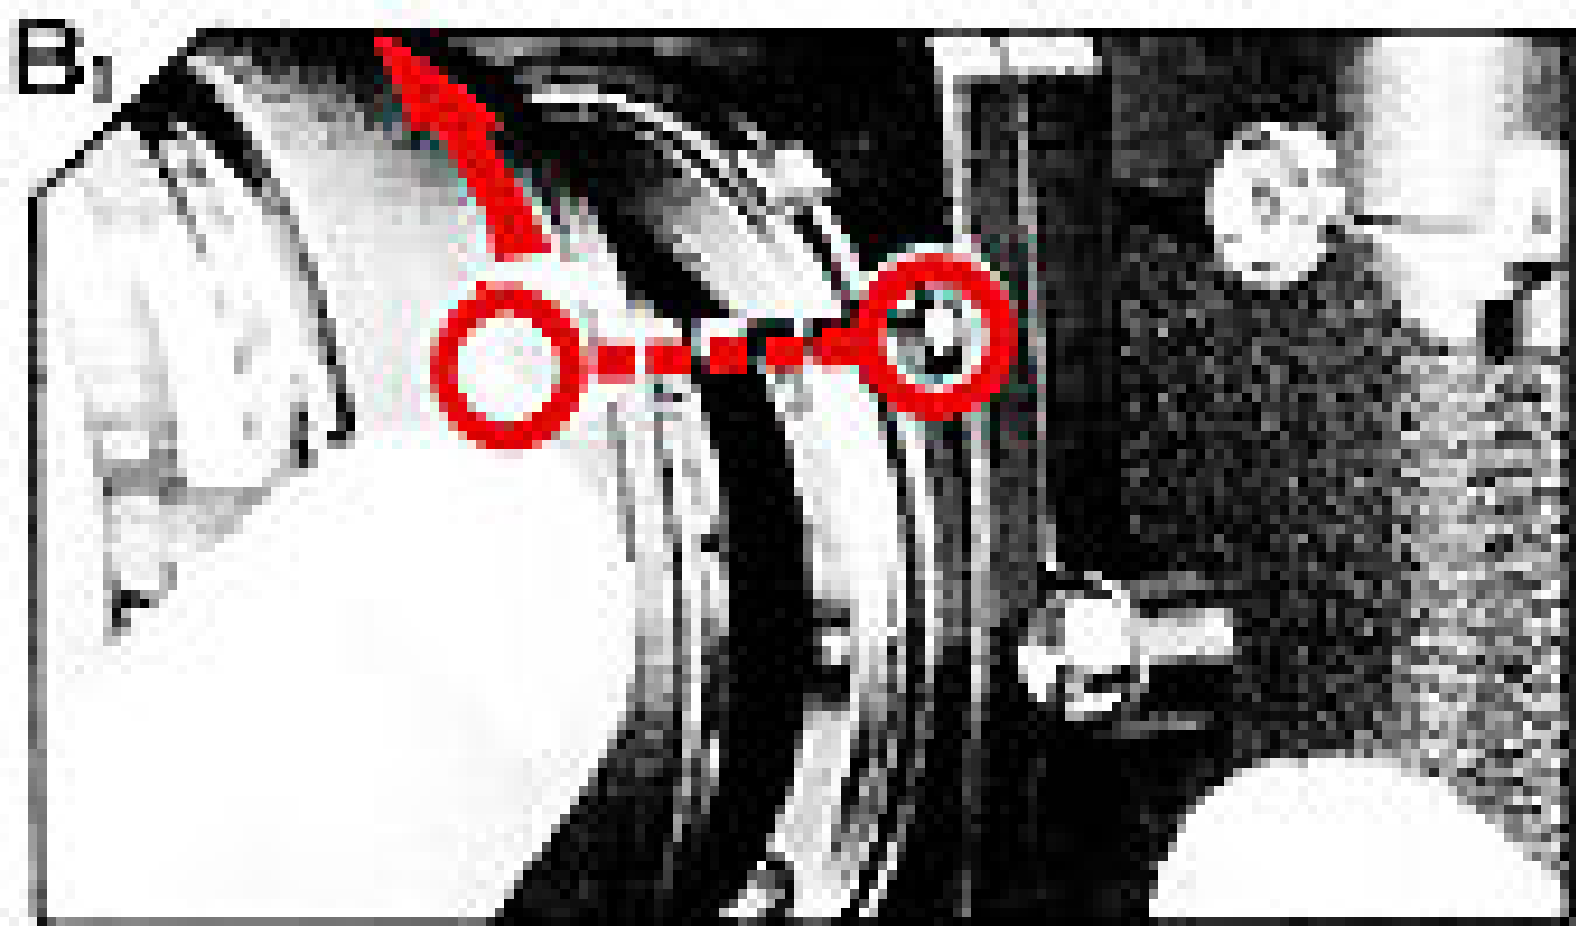

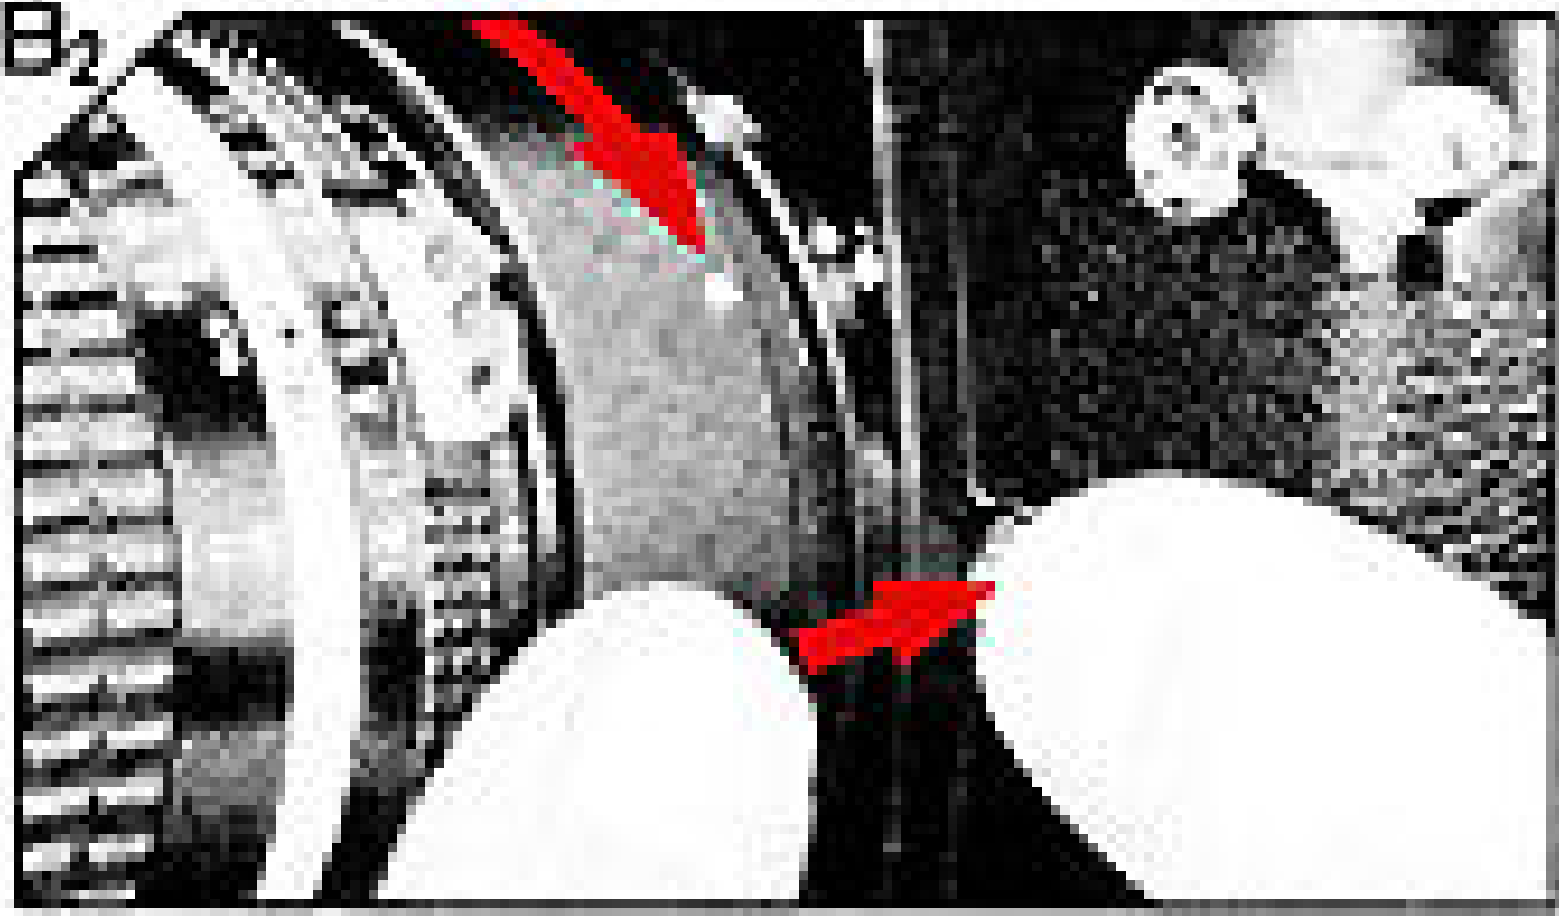


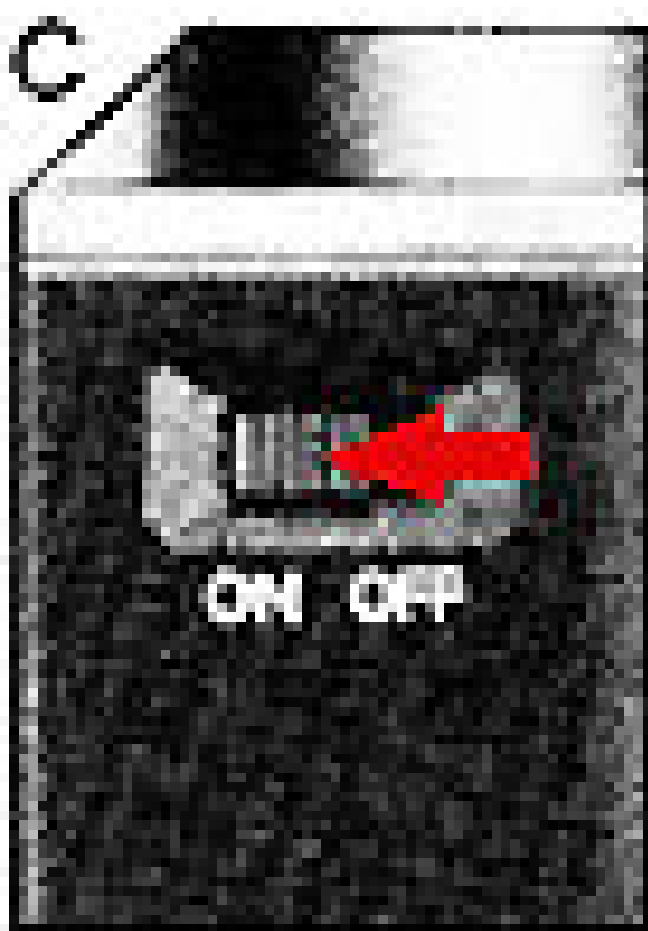







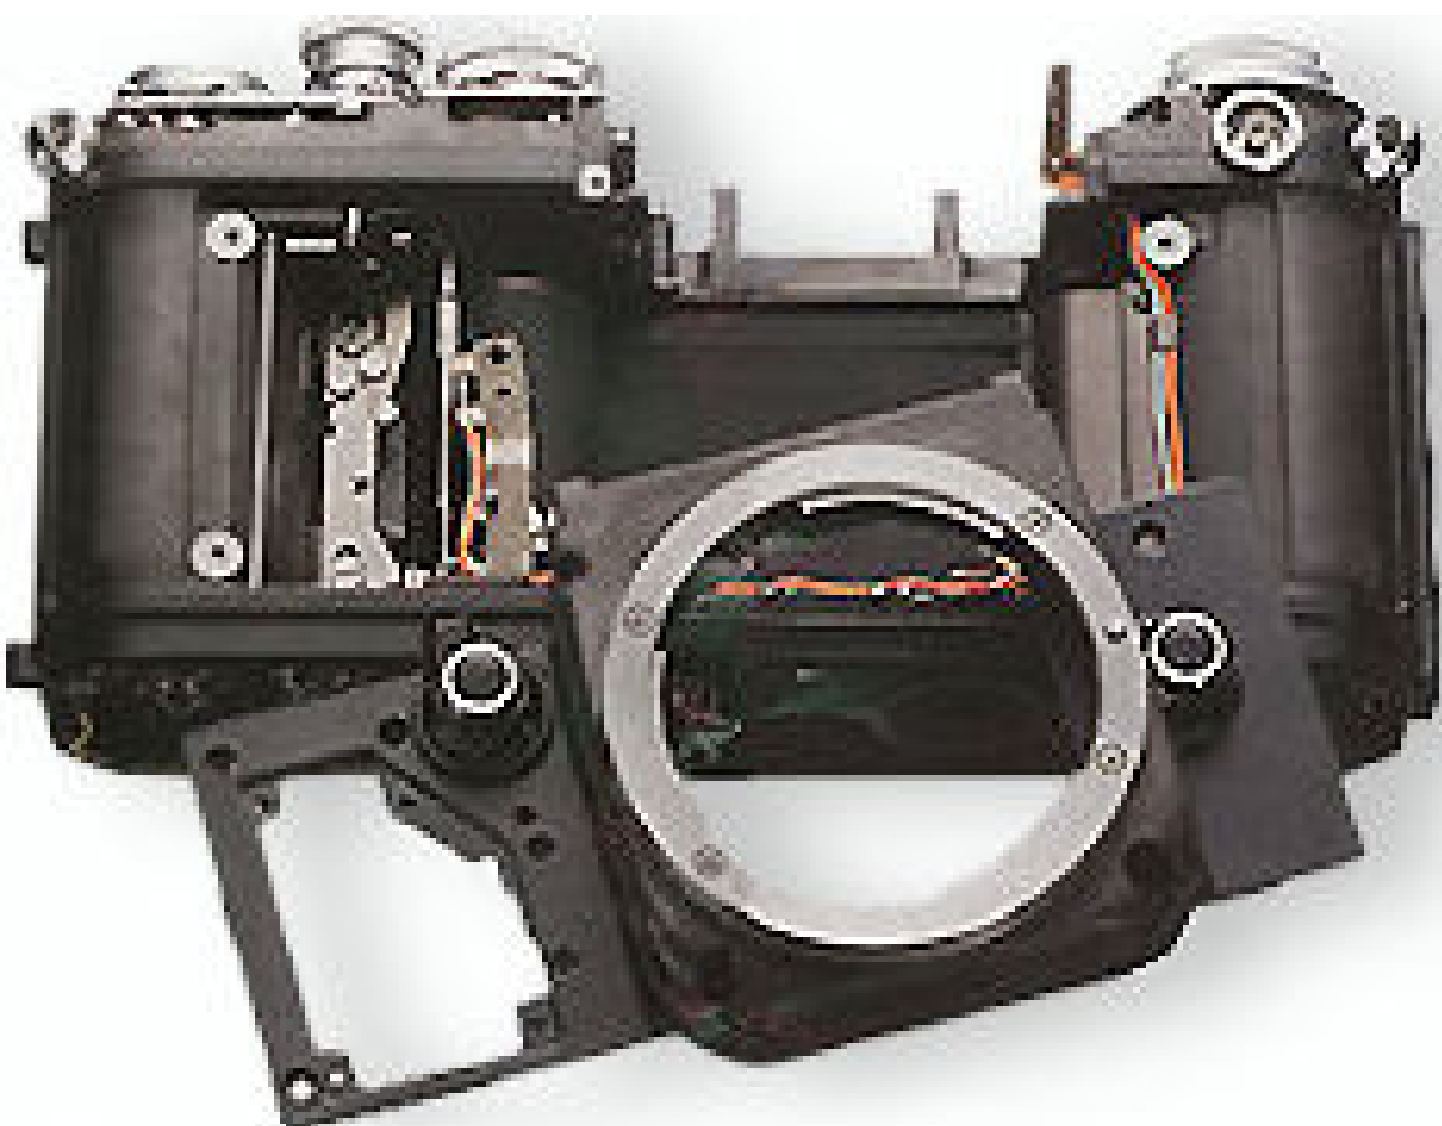































Nikon T8824307

Nikon
Nikon Drive
250457
































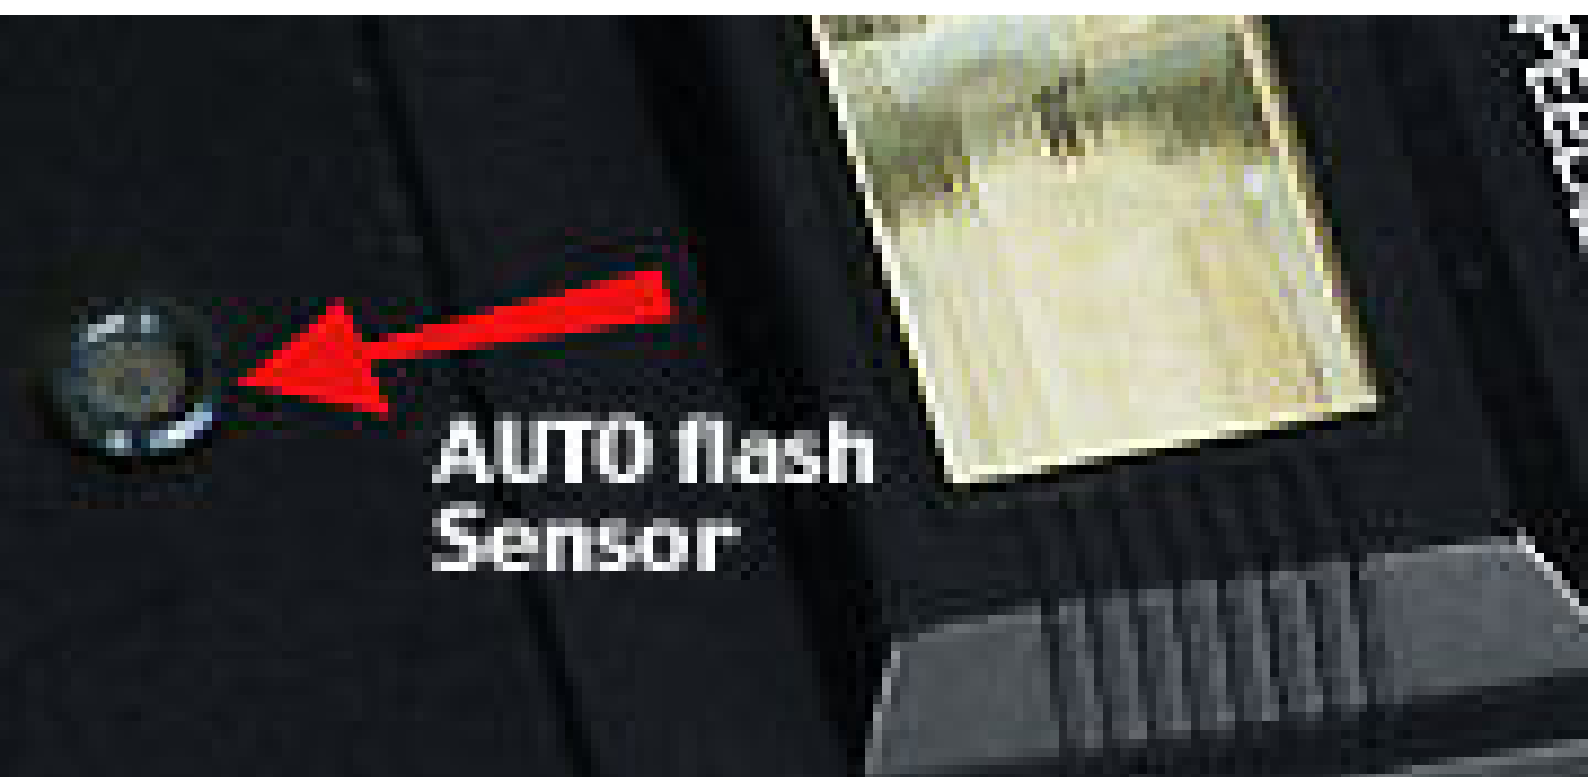

AUTO flash
Sensor

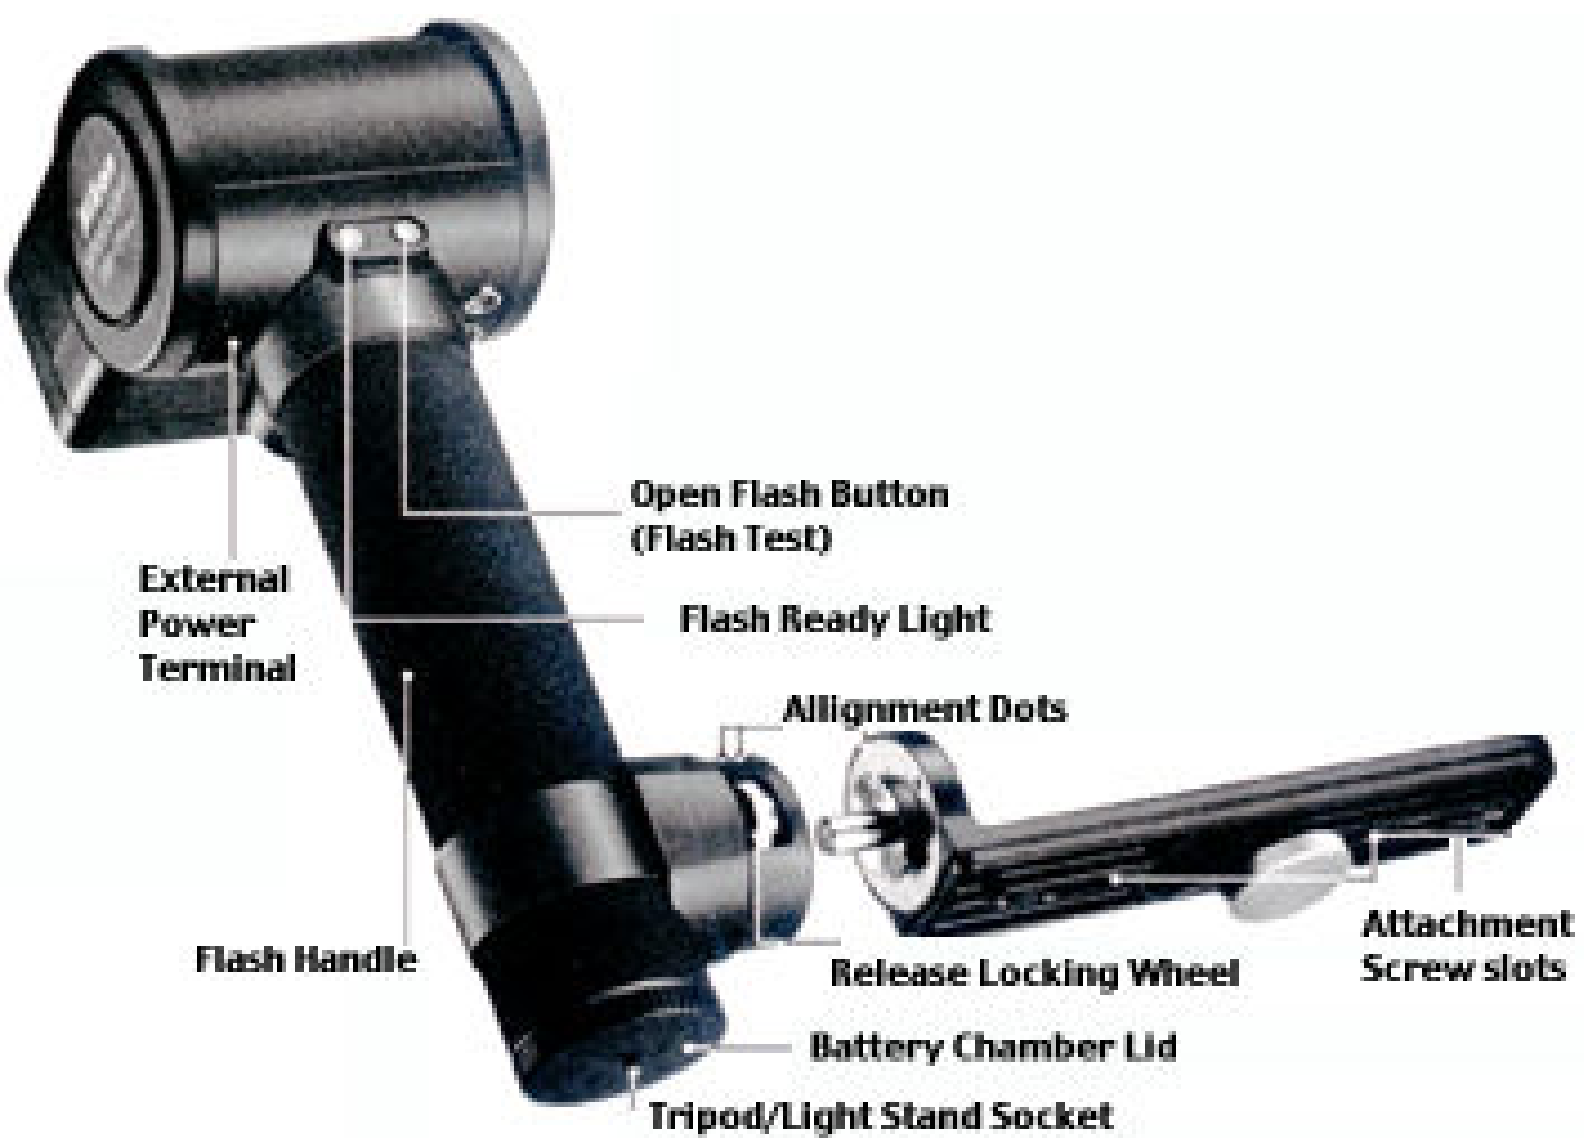

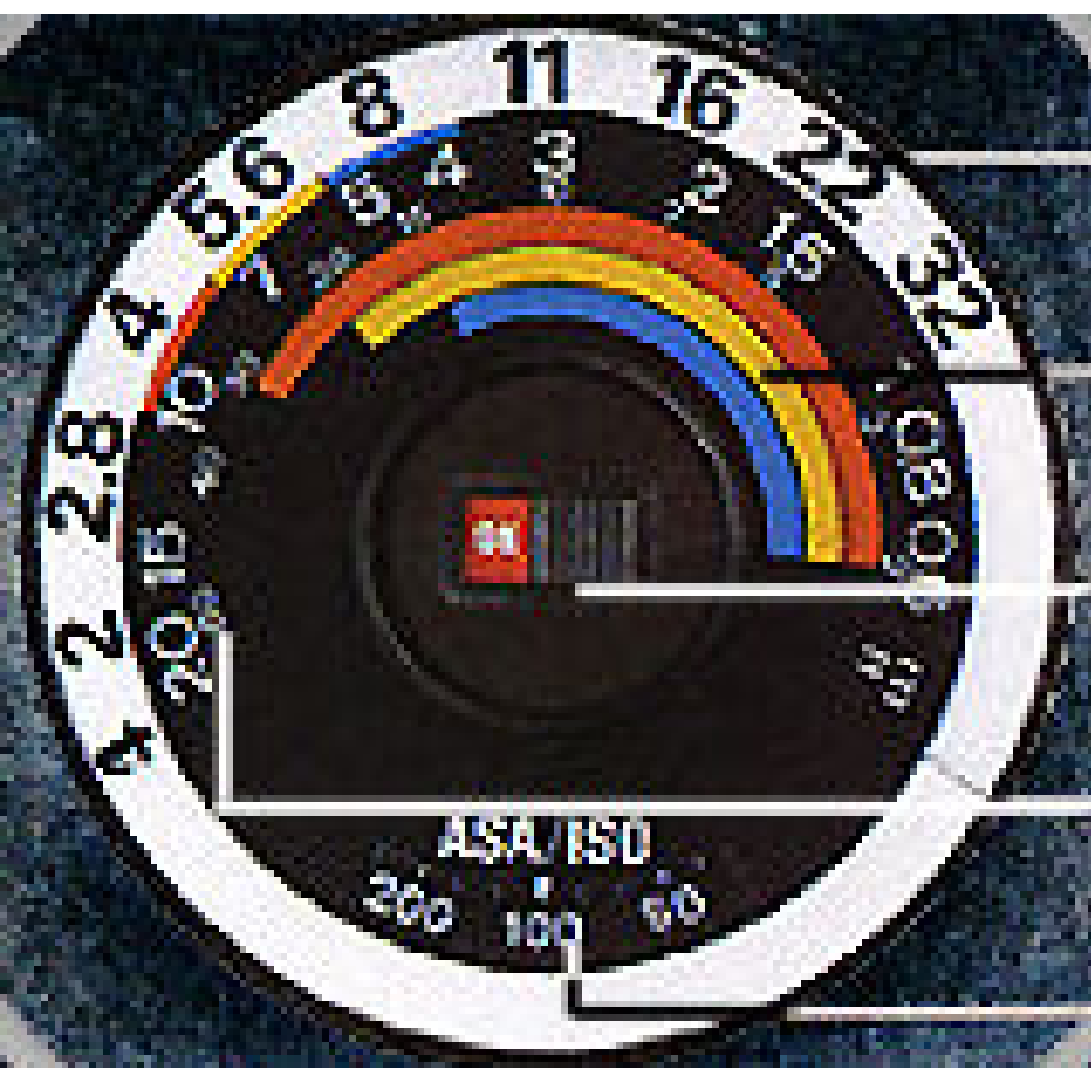


f-stop scale
(Black)

AUTO shooting
Range Indicator
(Color coded)

Power Switch

Distance Scale
(White)


ASA/ISO Film
Speed Index

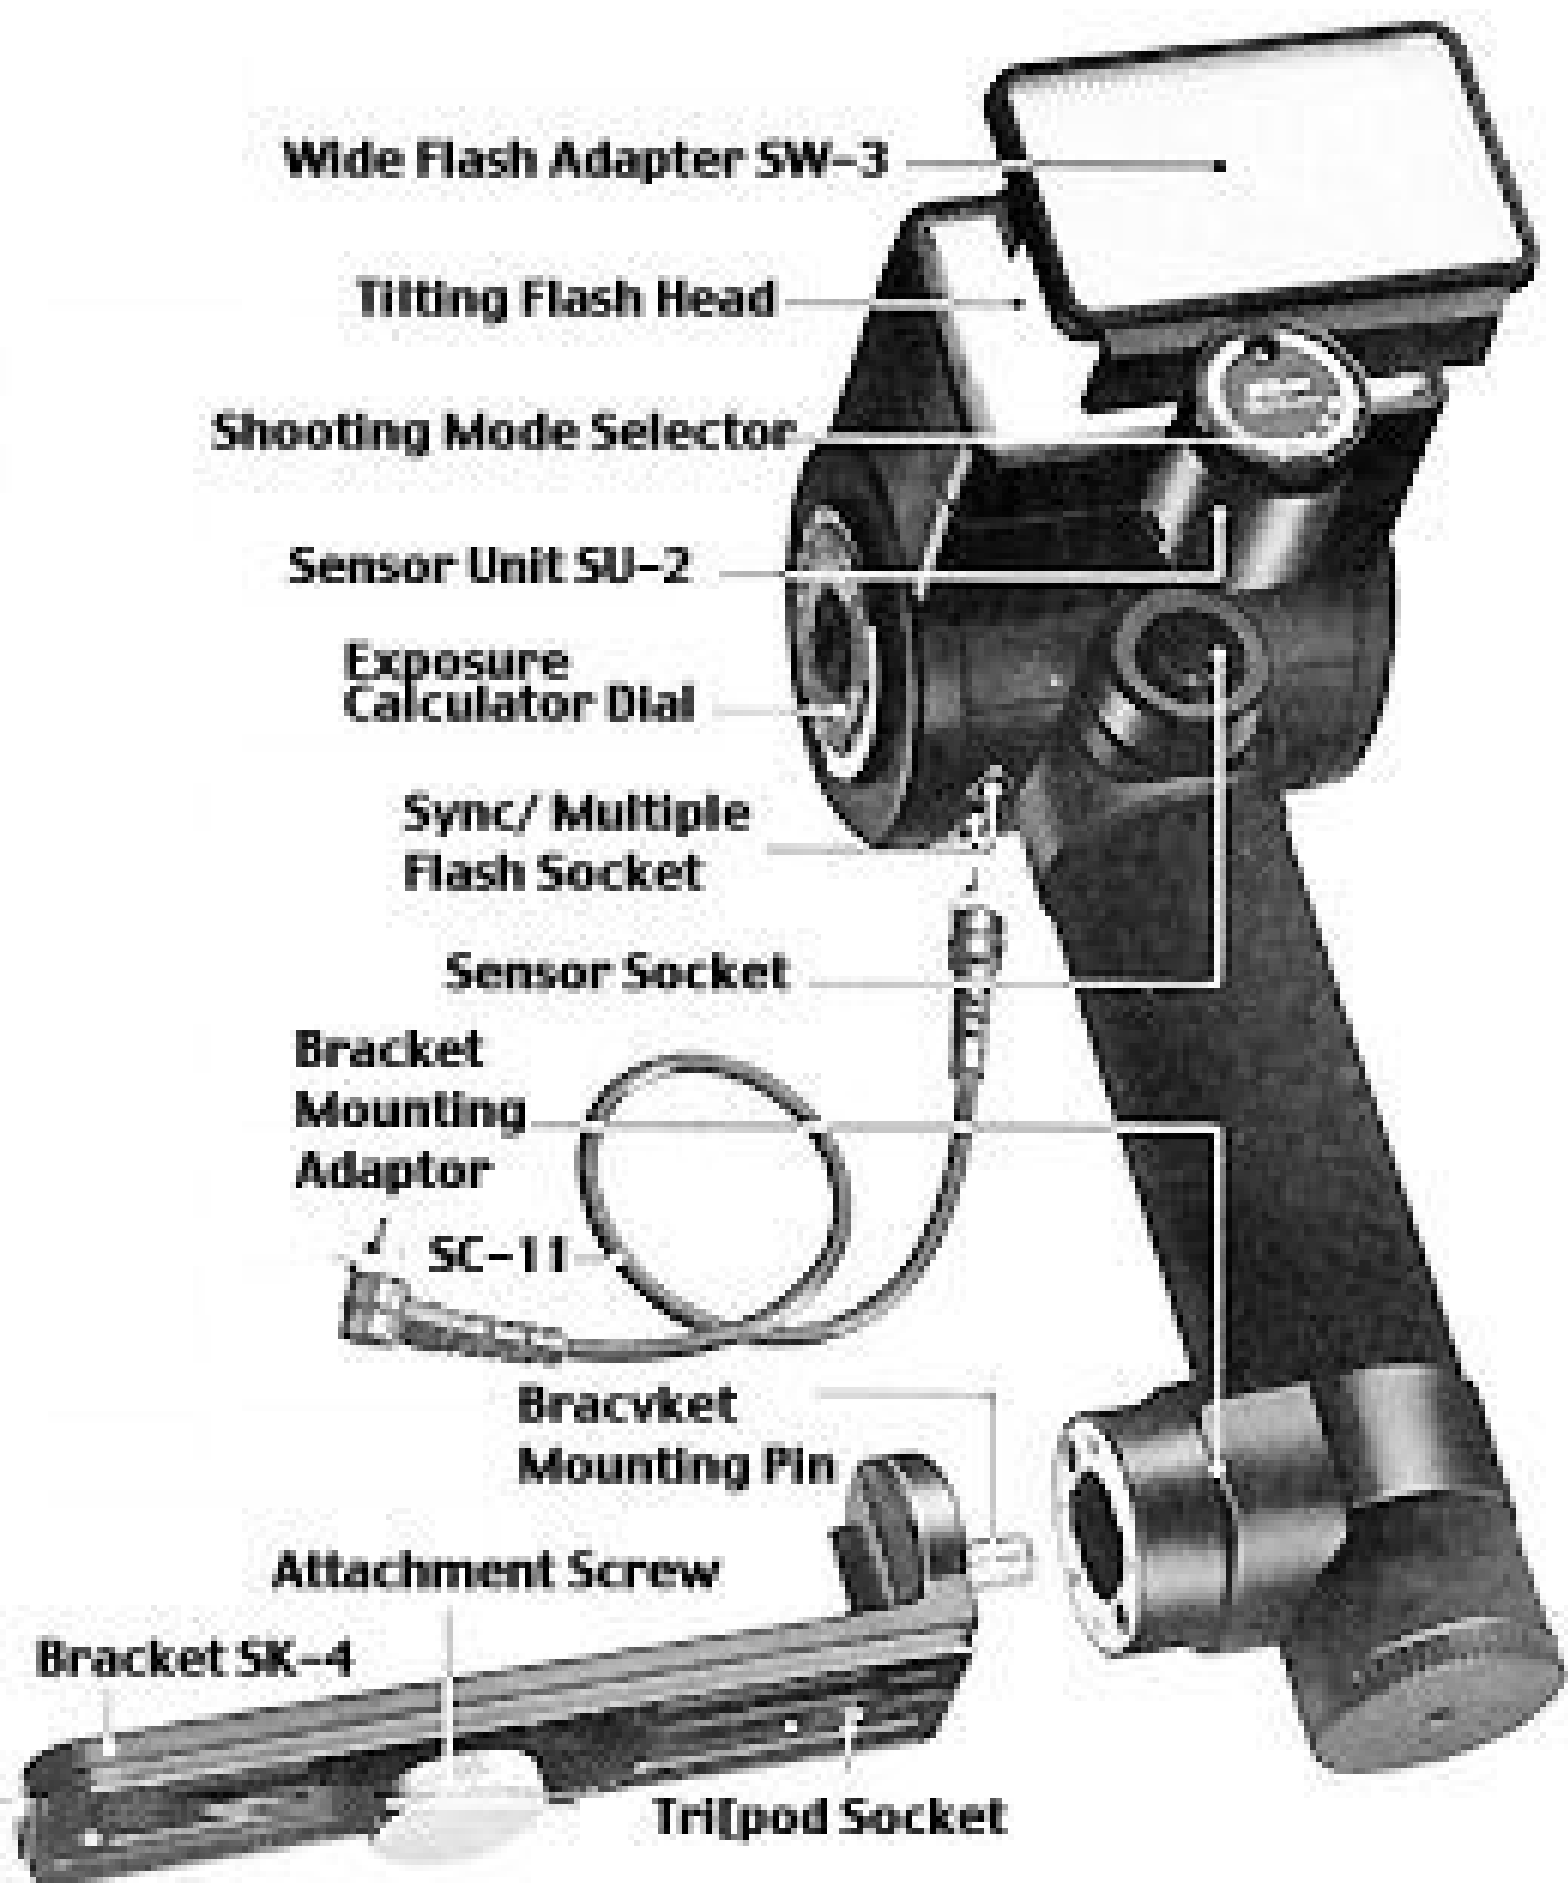









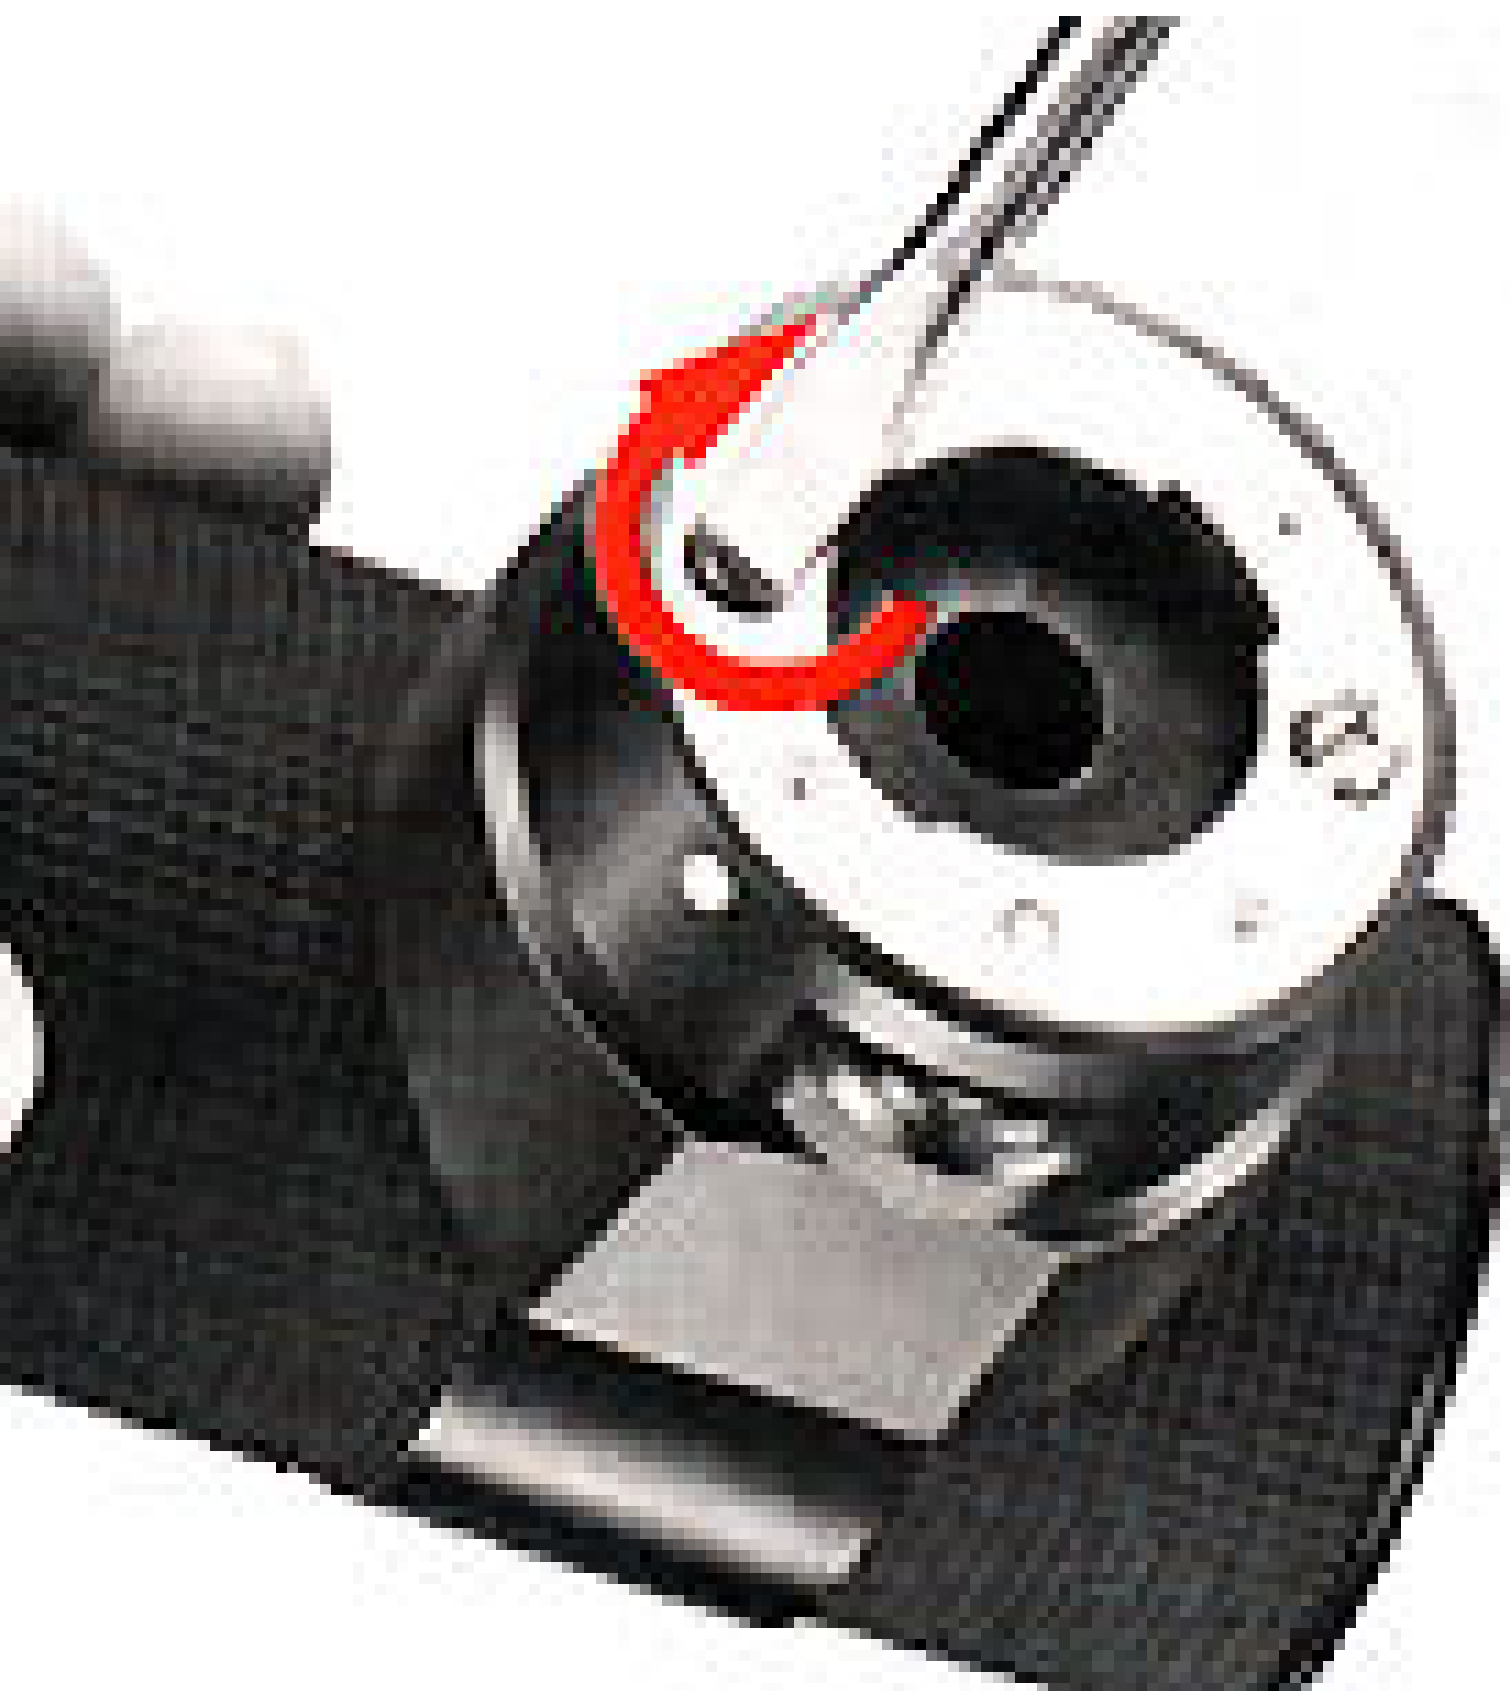




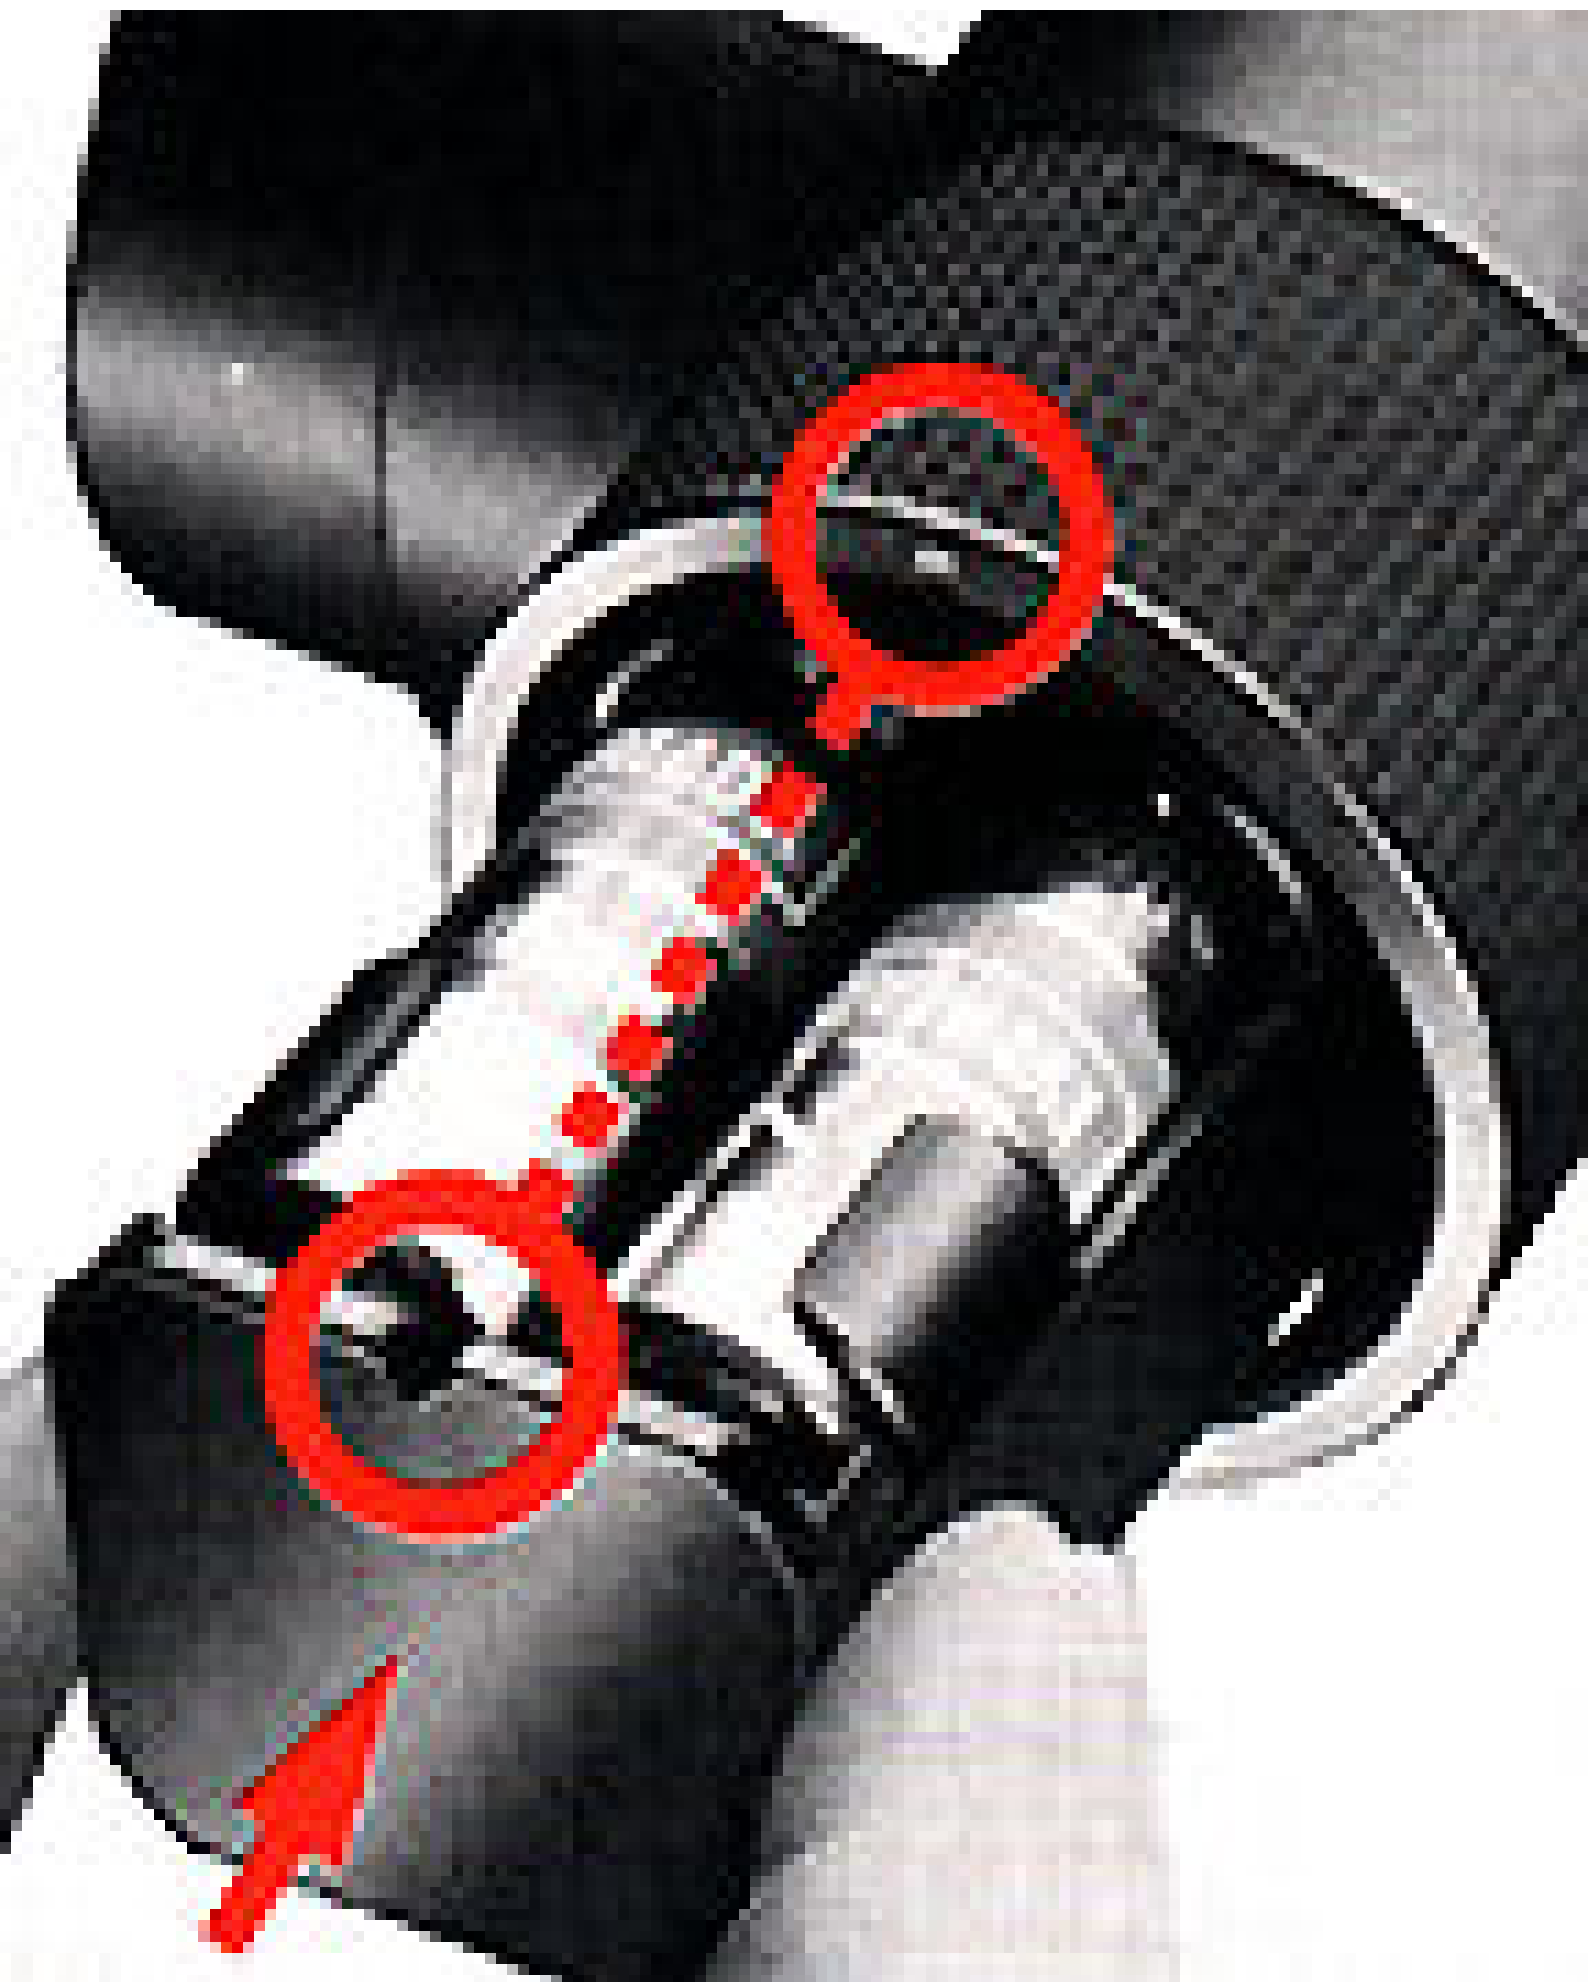




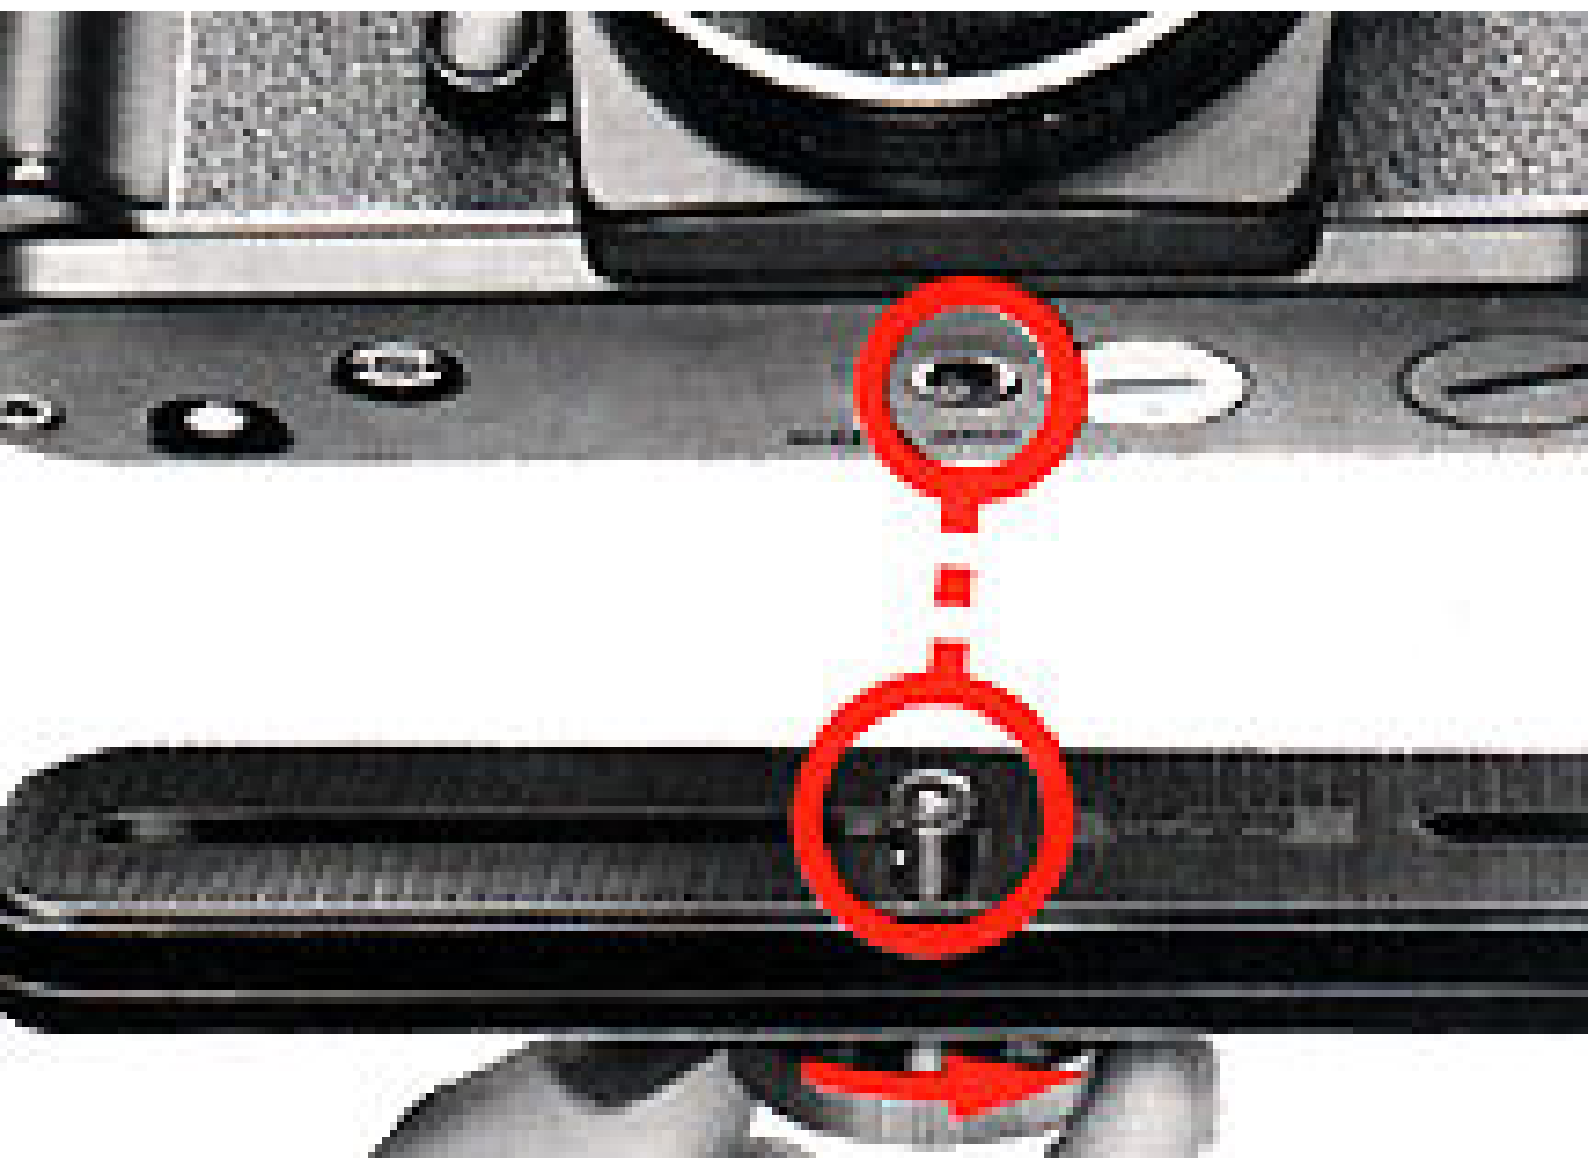



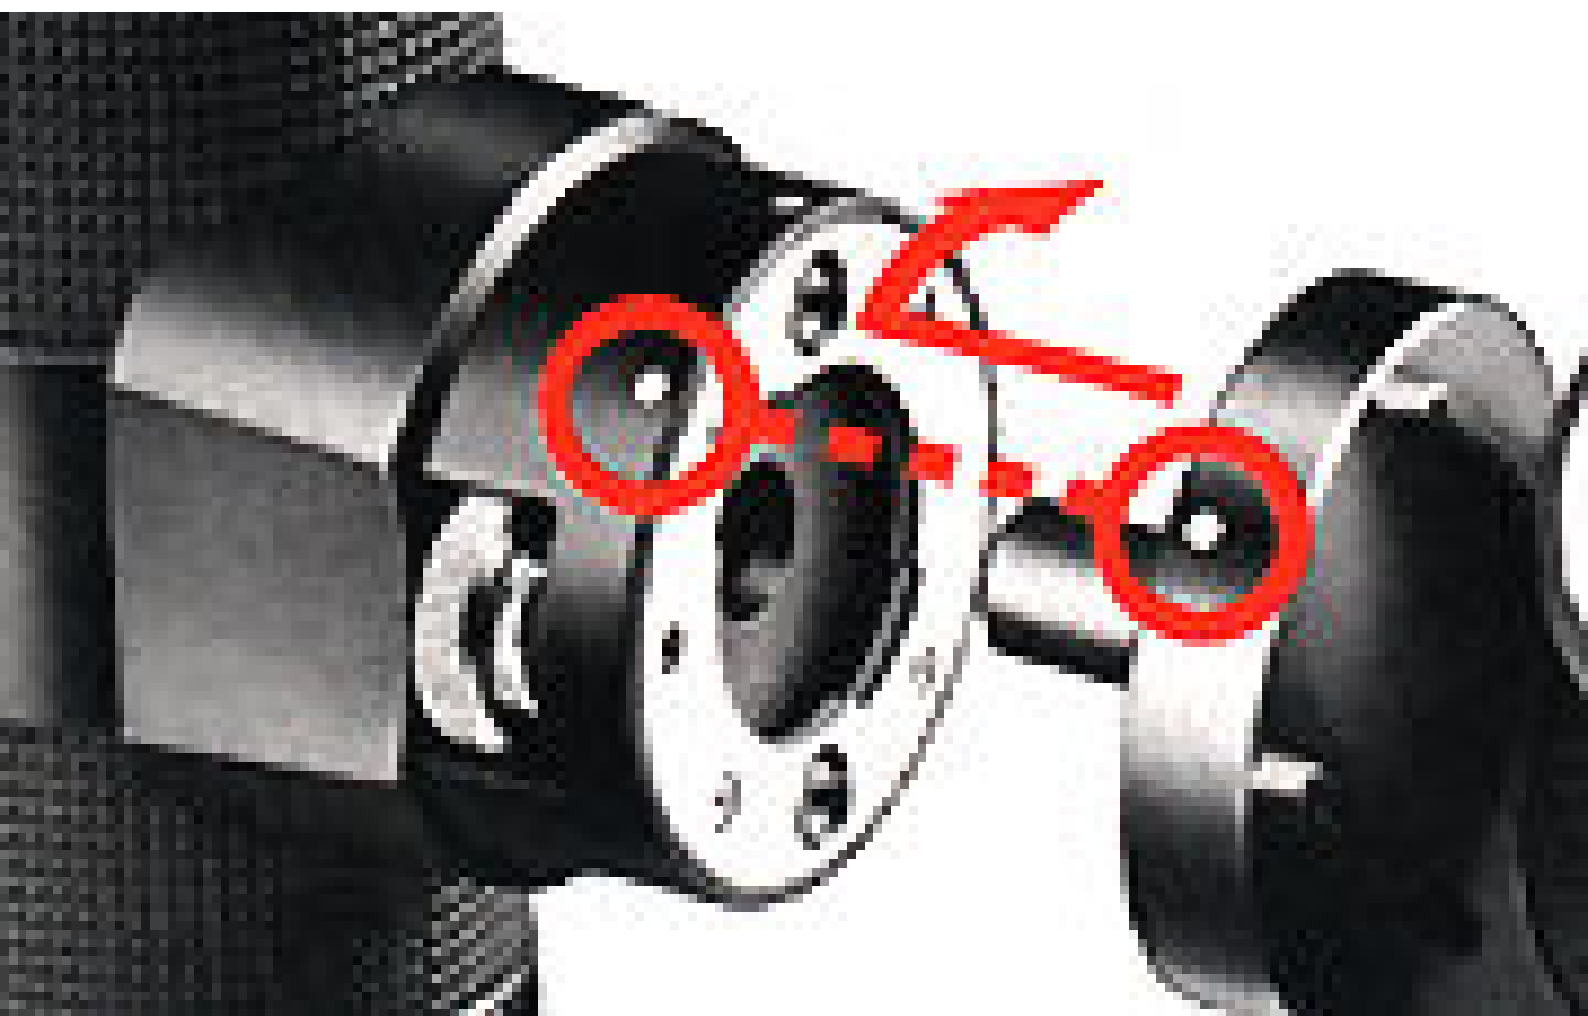

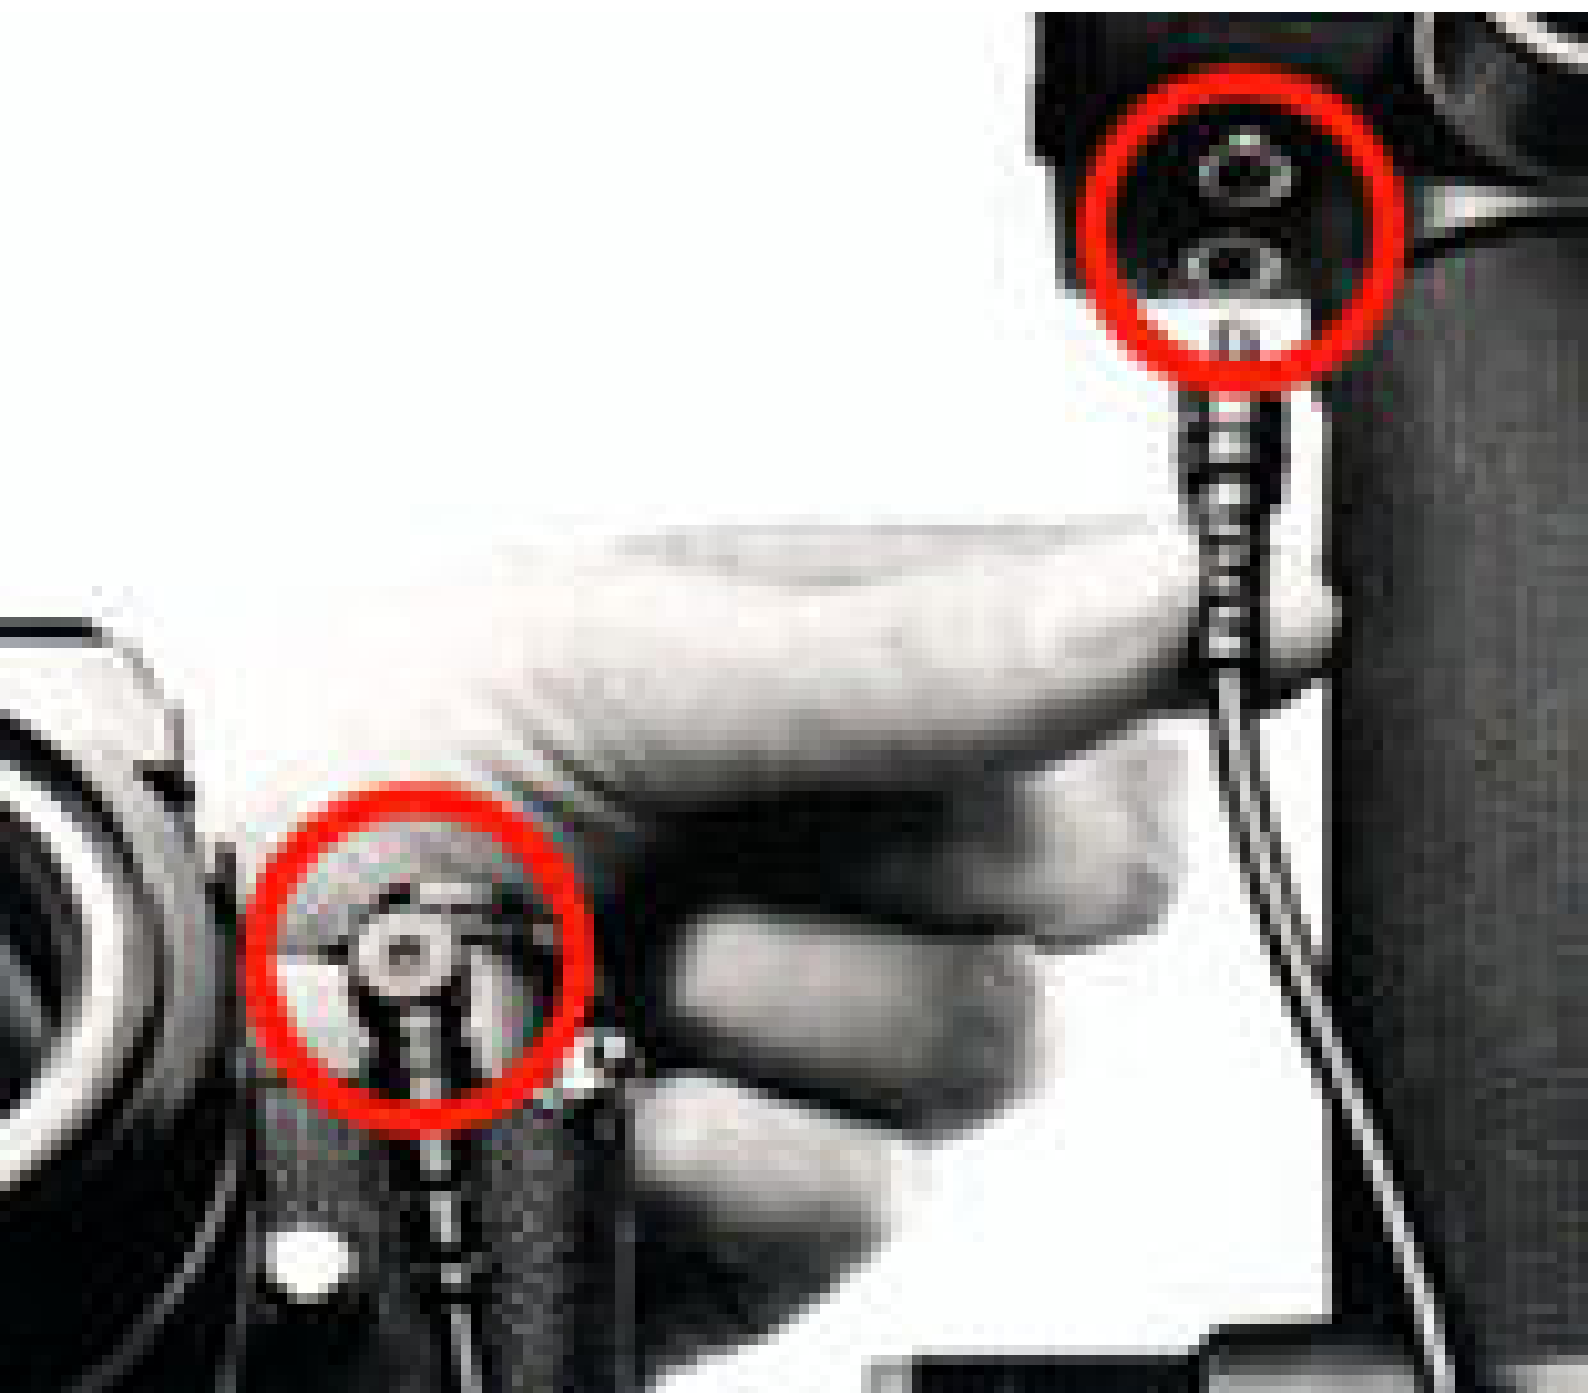







A black Nikon Speedlight SB-11 external flash unit is shown against a black background. The unit is rectangular with a large circular lens on the front. A red curved line is drawn above the unit, starting from the top left and ending at the top right. The text "Nikon" is printed in white at the top of the lens, "SPEEDLIGHT" is printed in white in the middle, and "SB-11" is printed in white at the bottom.

Nikon
SPEEDLIGHT
SB-11





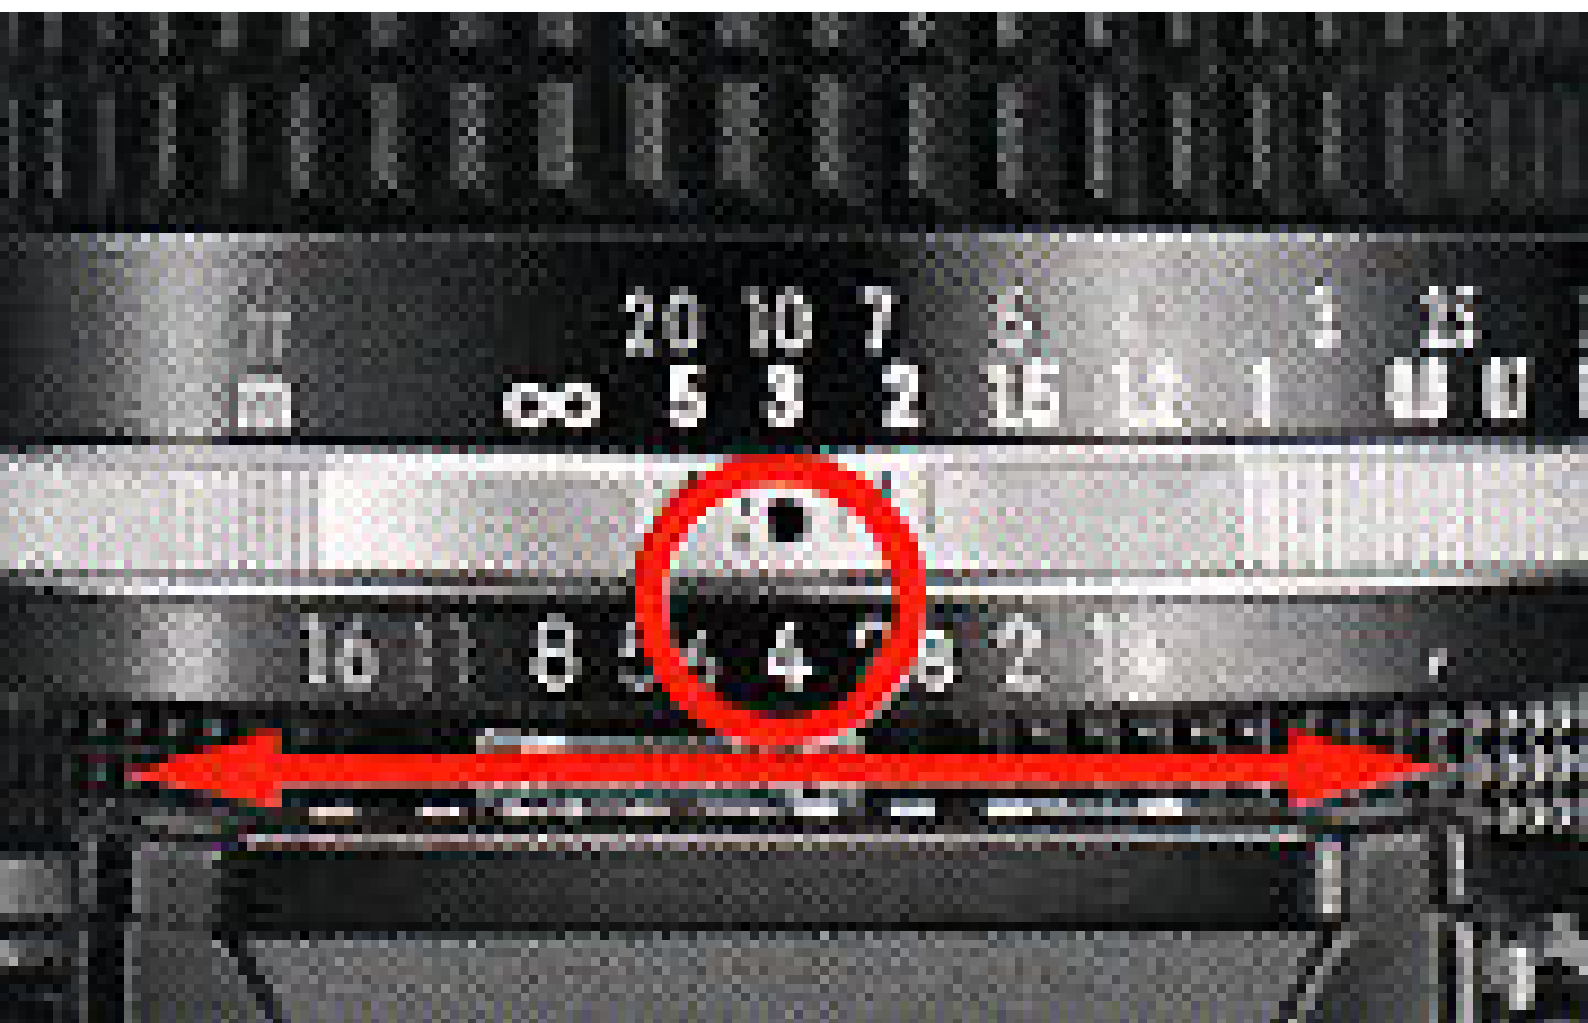

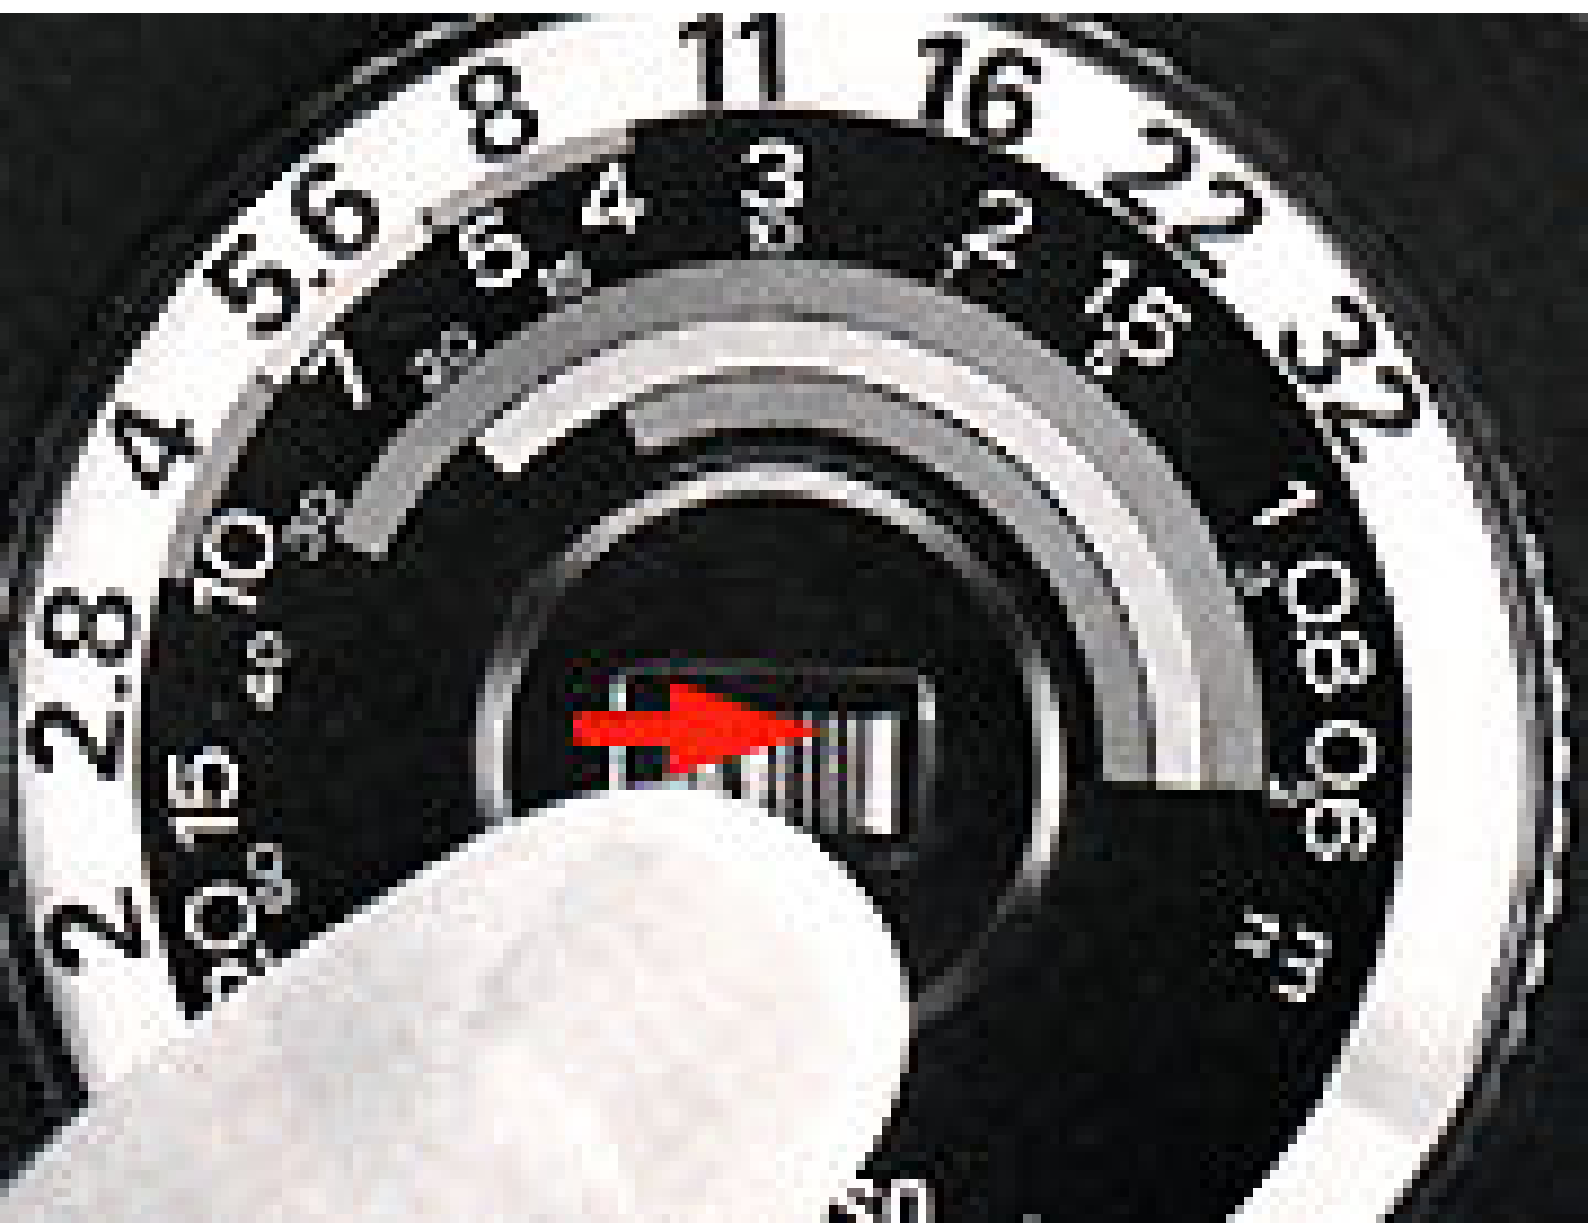







Open Flash Button

**Mounting
Foot With
Locking
Ring**


Ready Light

**Power
ON/OFF
Switch**

**Shooting
Mode
Selector**

Sync Socket

Flash Contact Pins

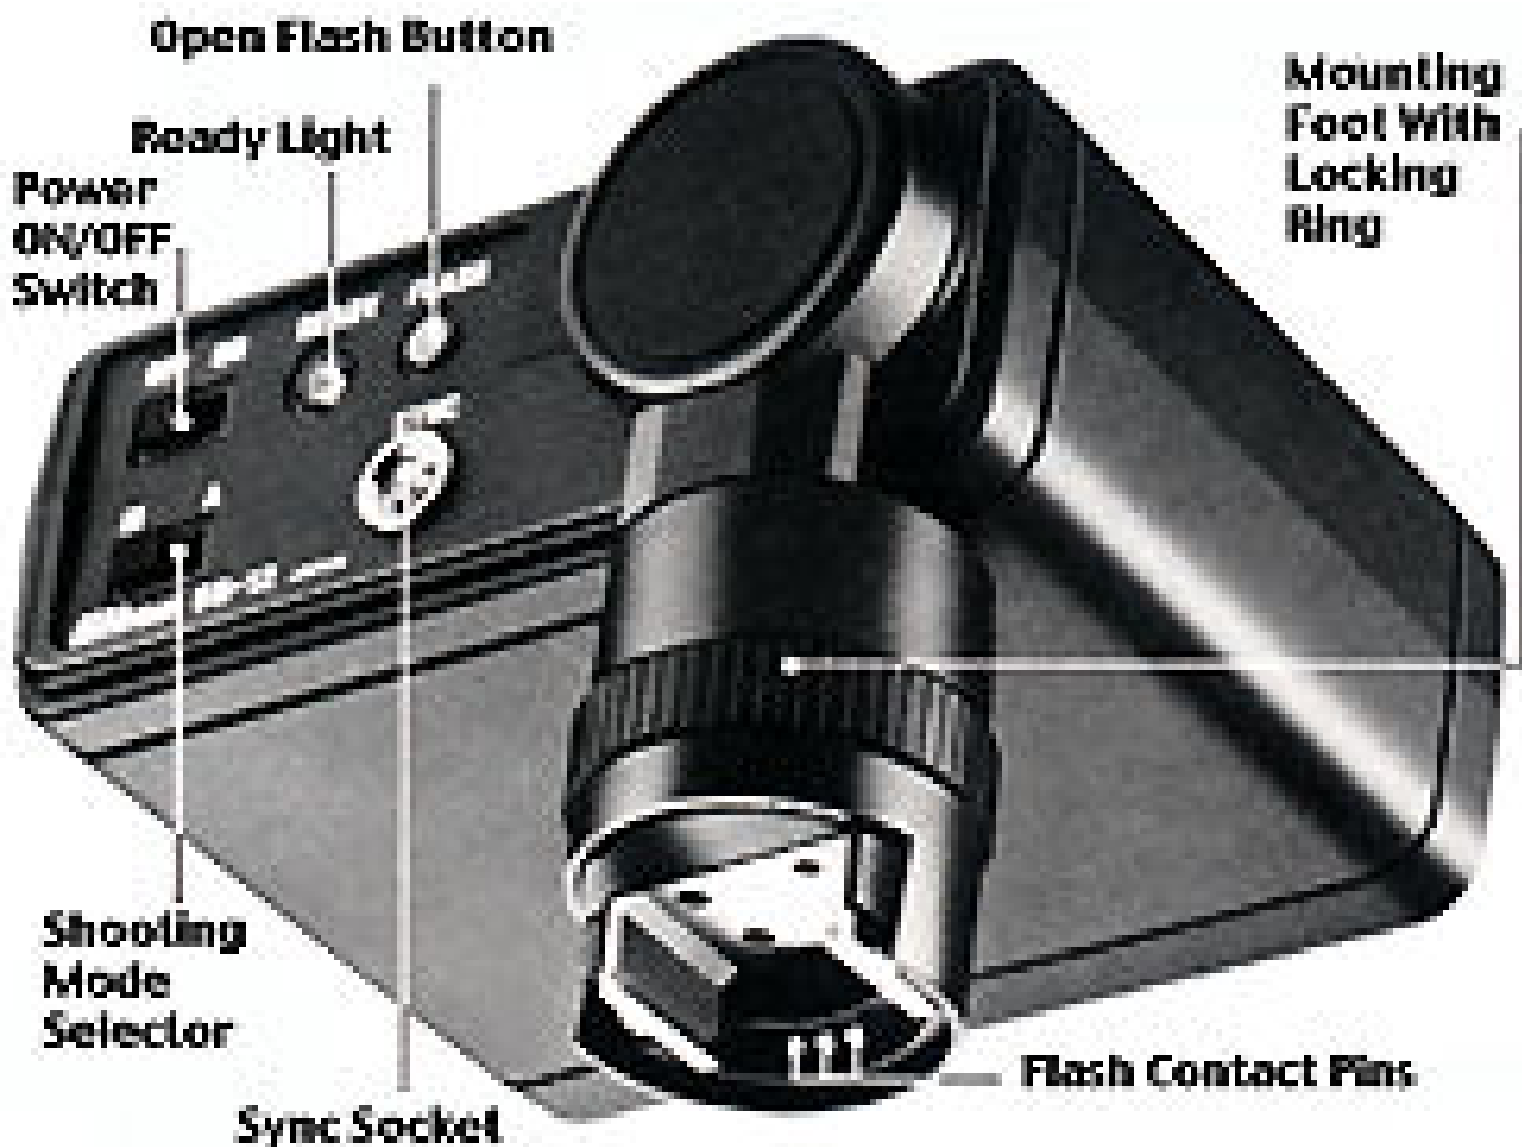




Flash Exposure
Calculation Dial

Flash Module
(Can used with
Wide Flash
Adaptor)

Battery
Chamber
(with lid)

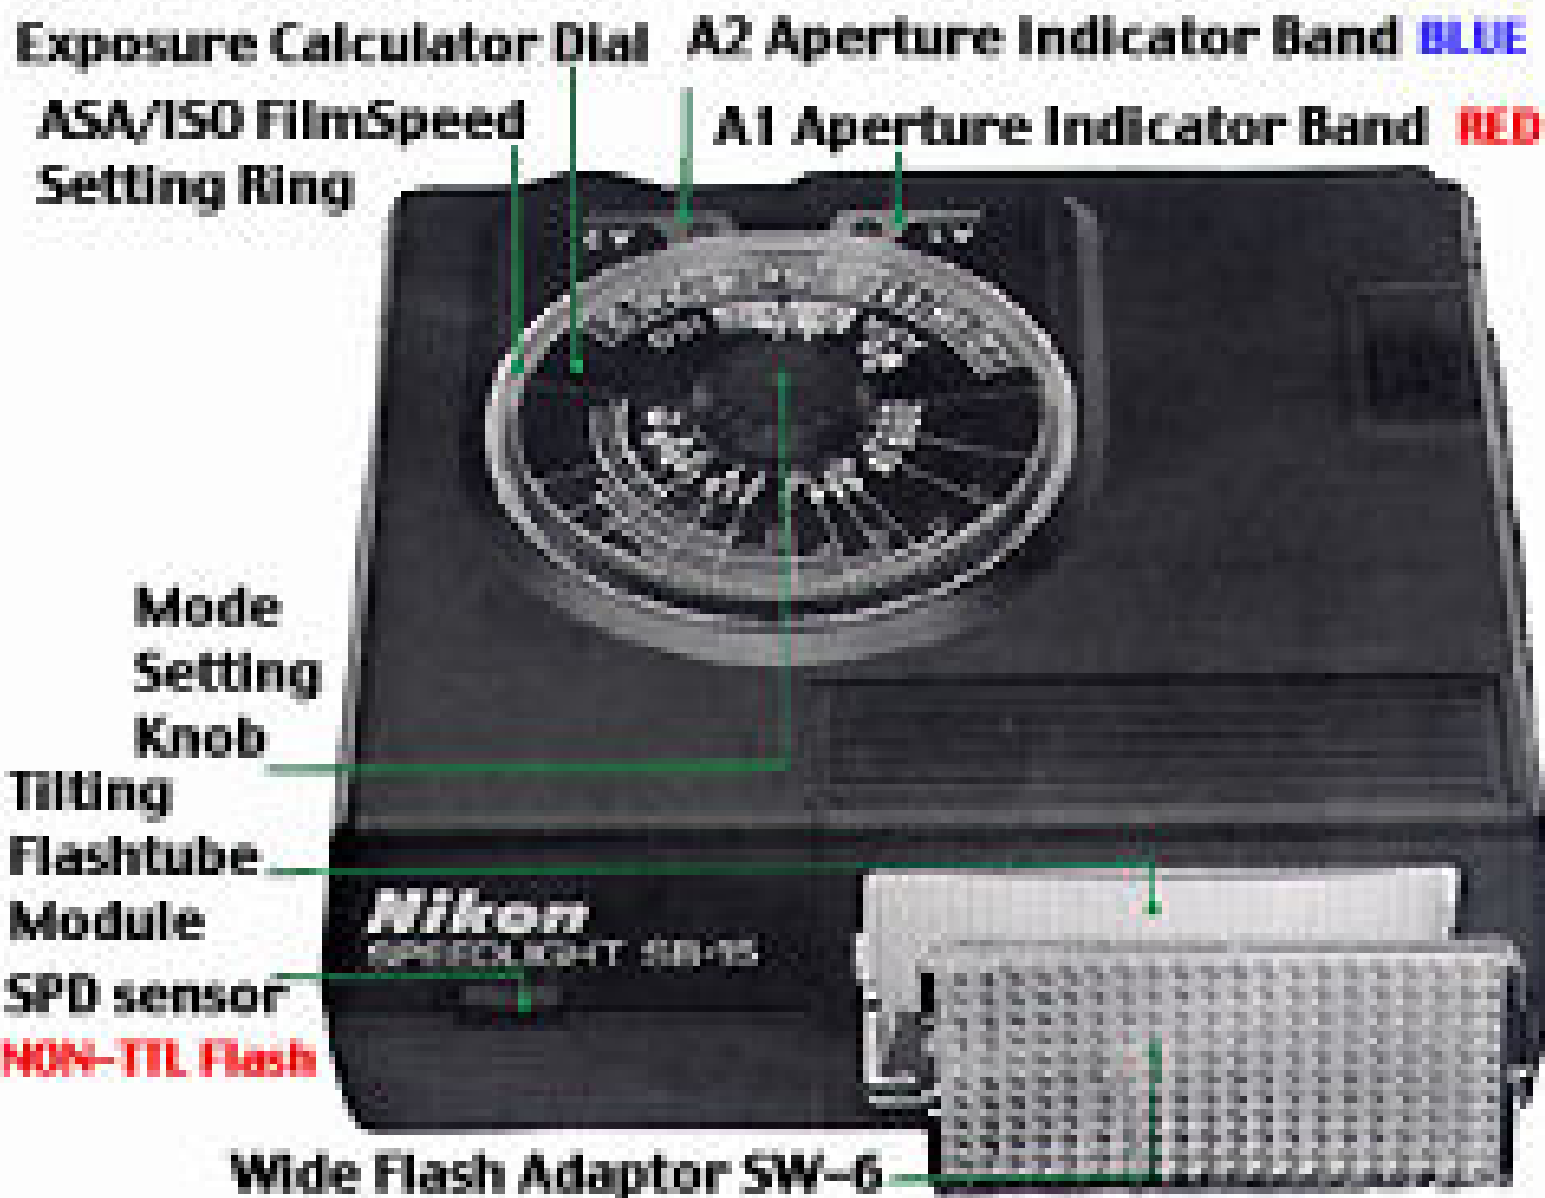


**AUTO Shooting
Range Indicator**

**Distance Scale
(White color)**

**ASA/ISO Film
Speed Index
(With Wide
Adapter
attached)**

**ASA/ISO Film
Speed Index**




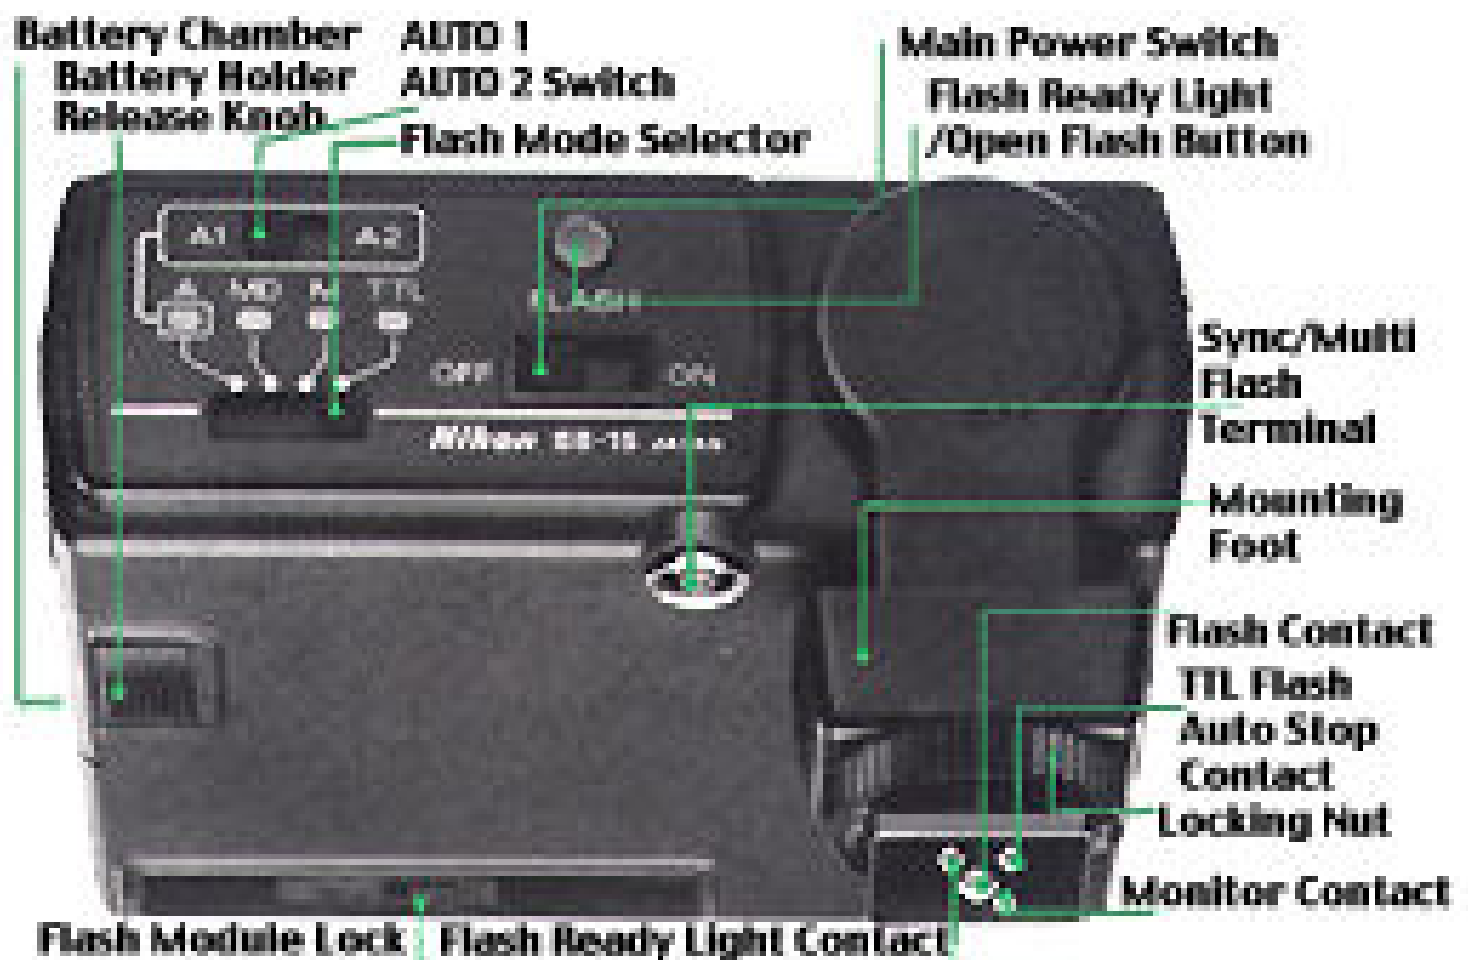

NIKON
BC-B
FLASH UNIT





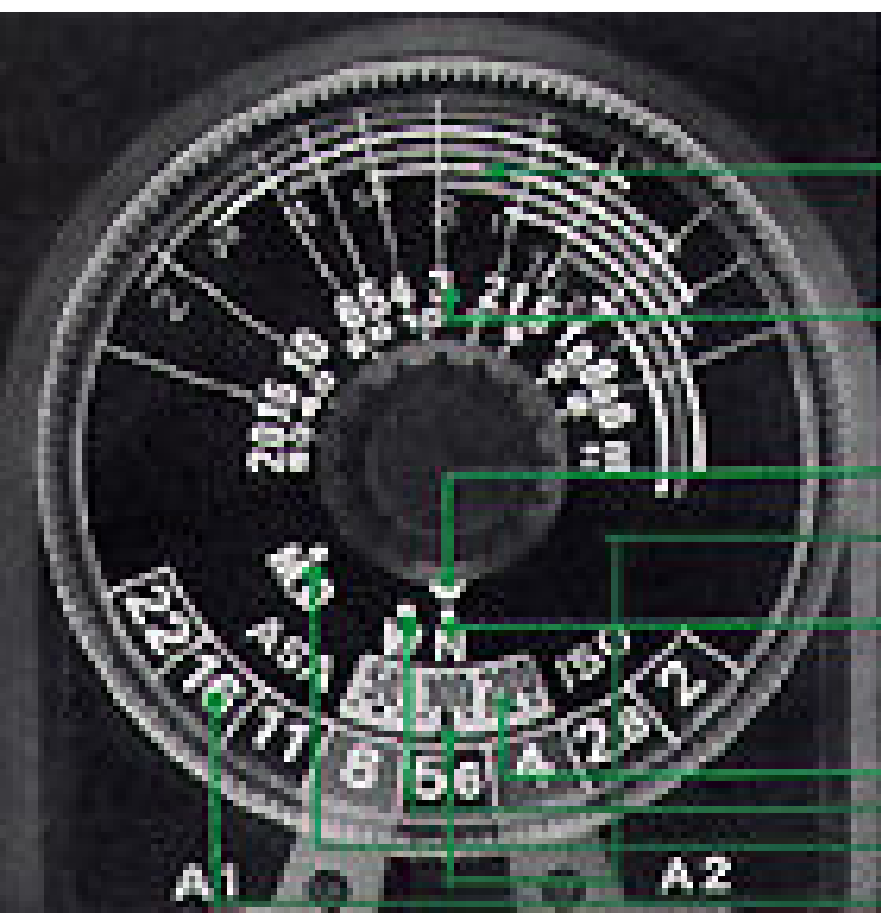

**AUTO shooting Range
(Color Coded)**

Distance Scale

Mode Setting Index

N (Normal Index)

Film Speed Scale


Film Speed Index

**W (Wide Adapter)
Index**


**MD (Motor Drive)
Index**

AUTO sync f-stop scale



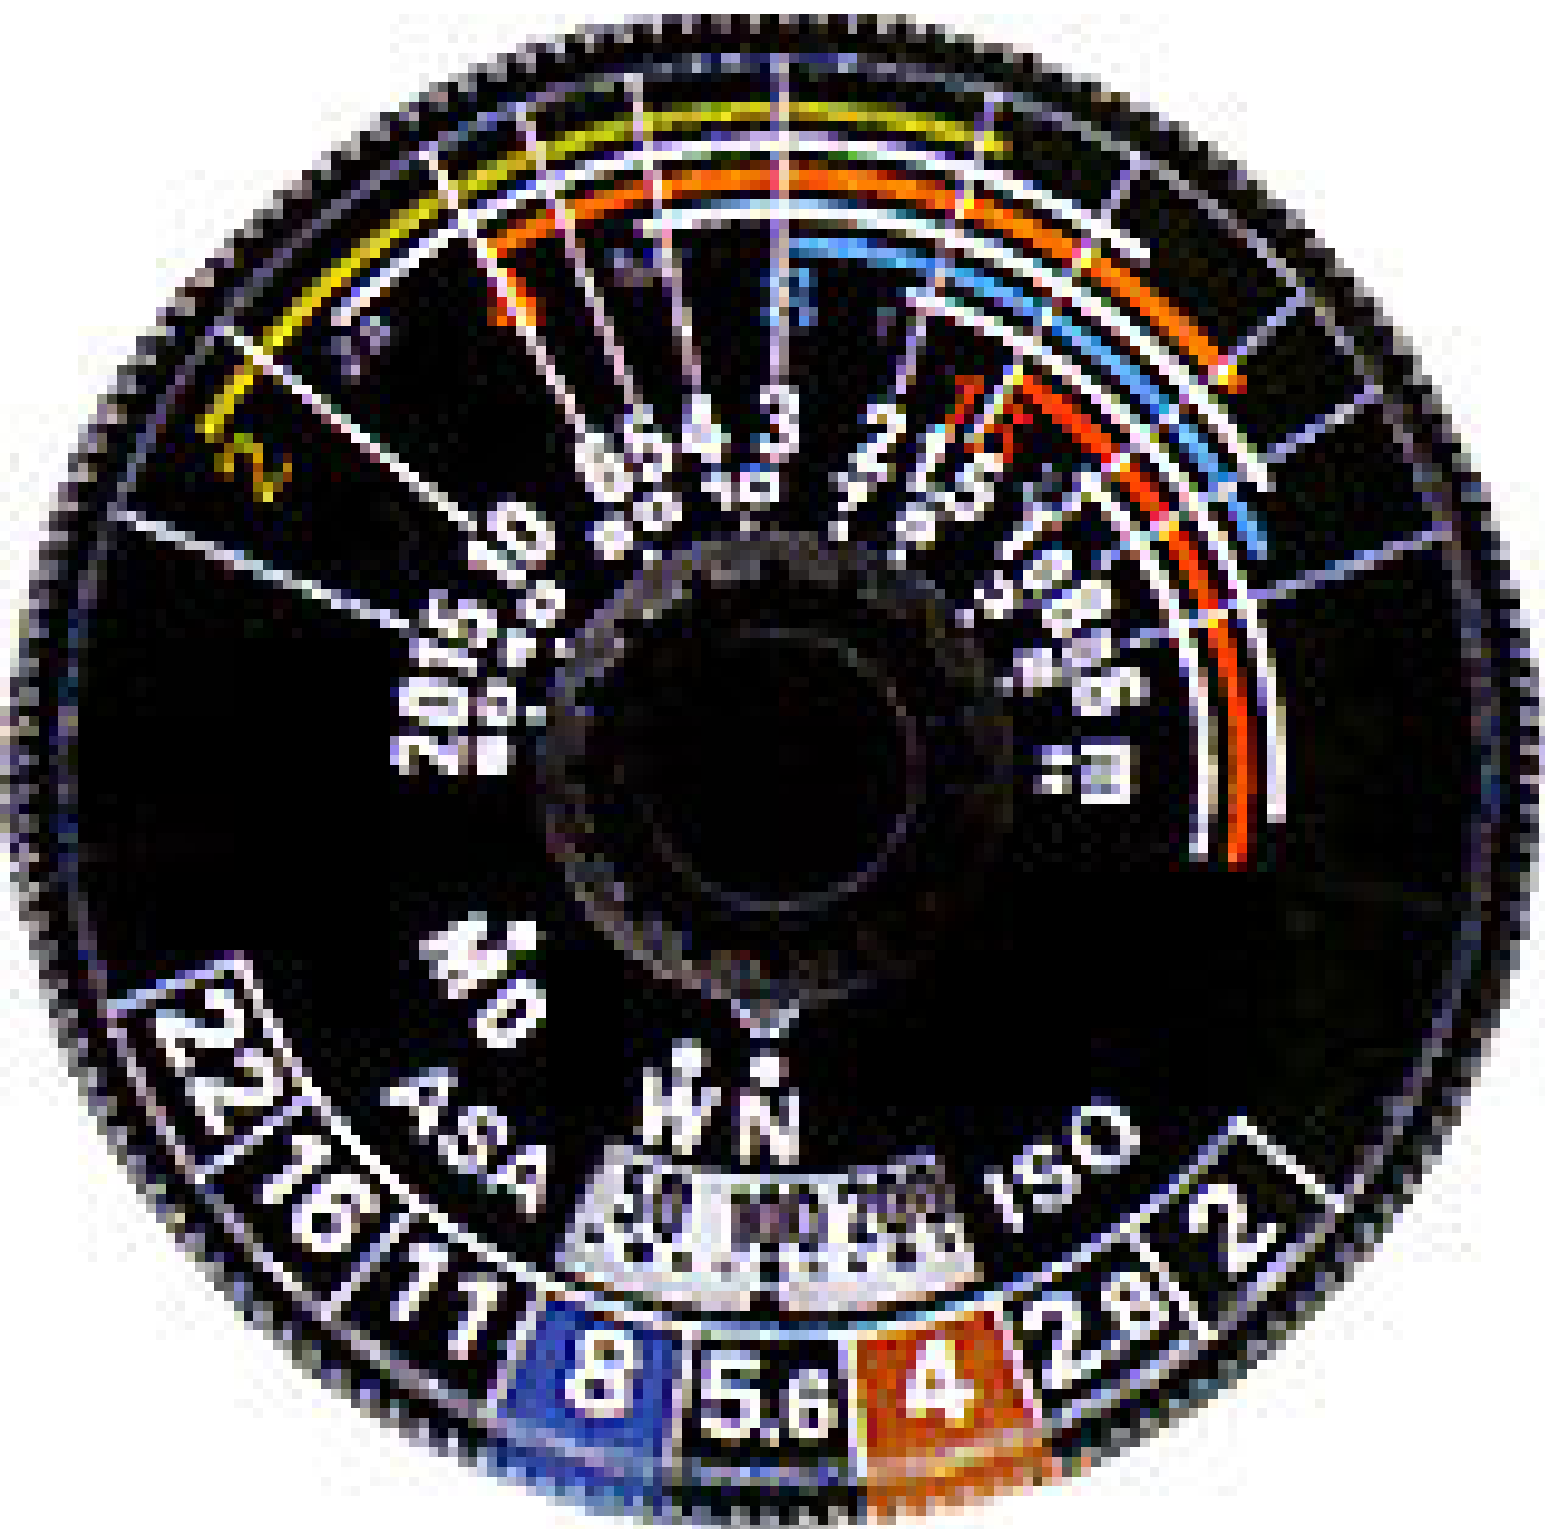




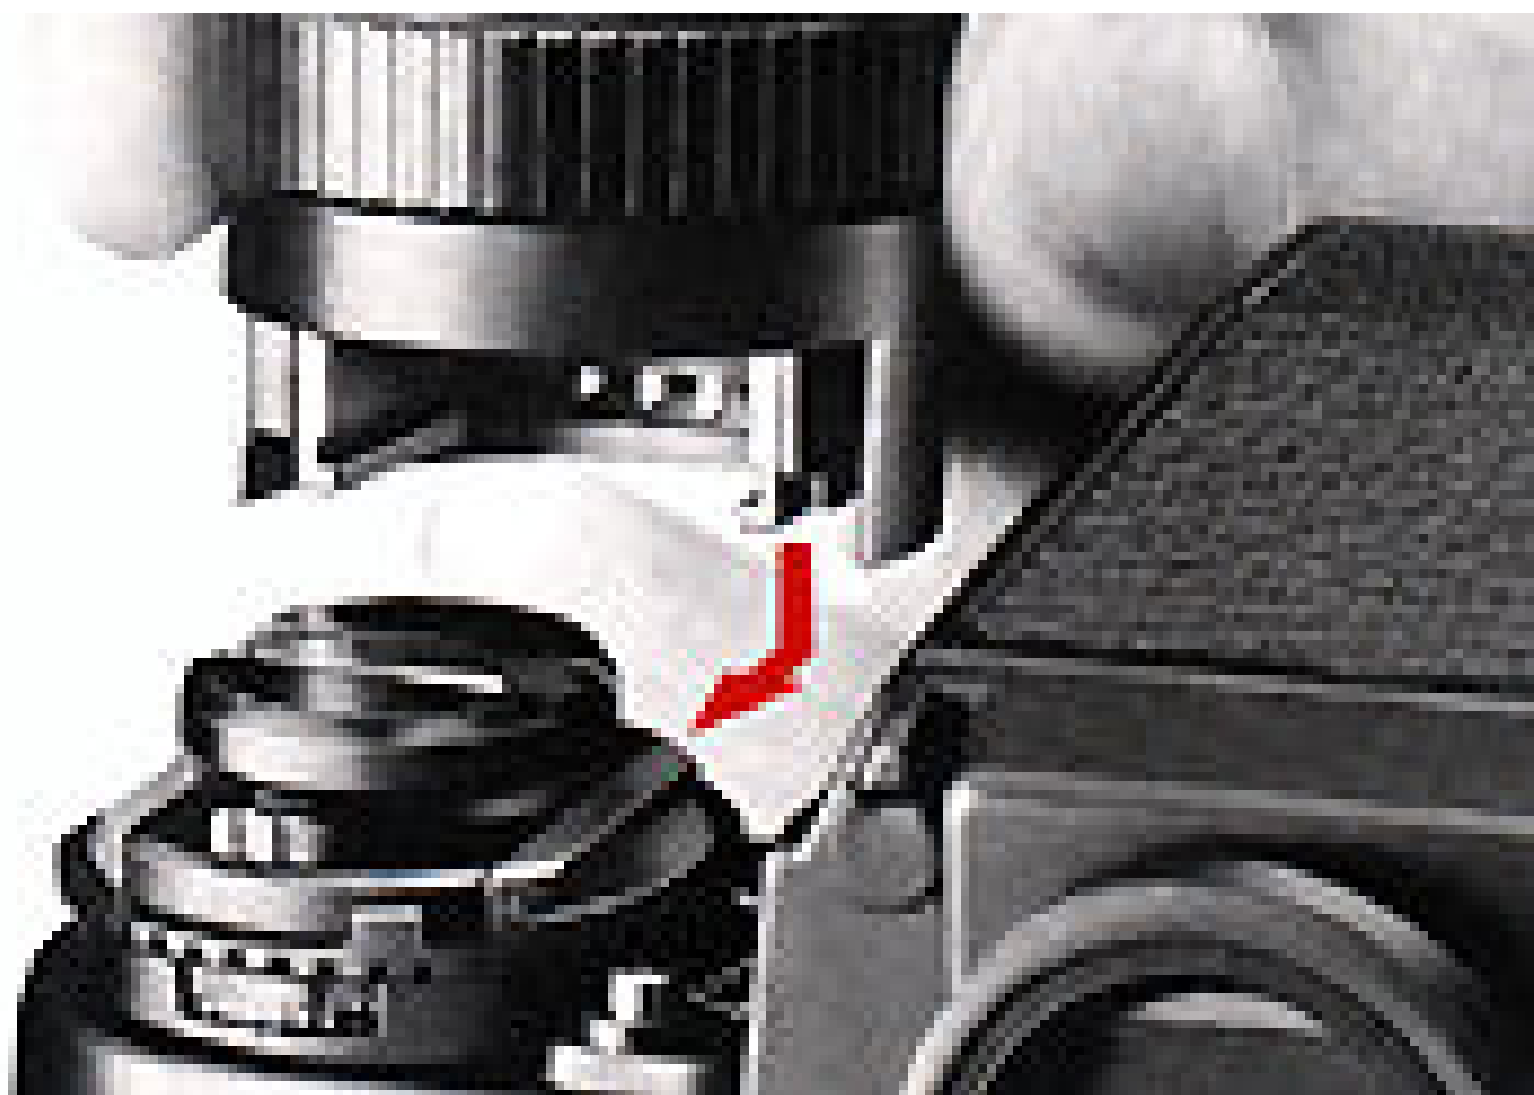








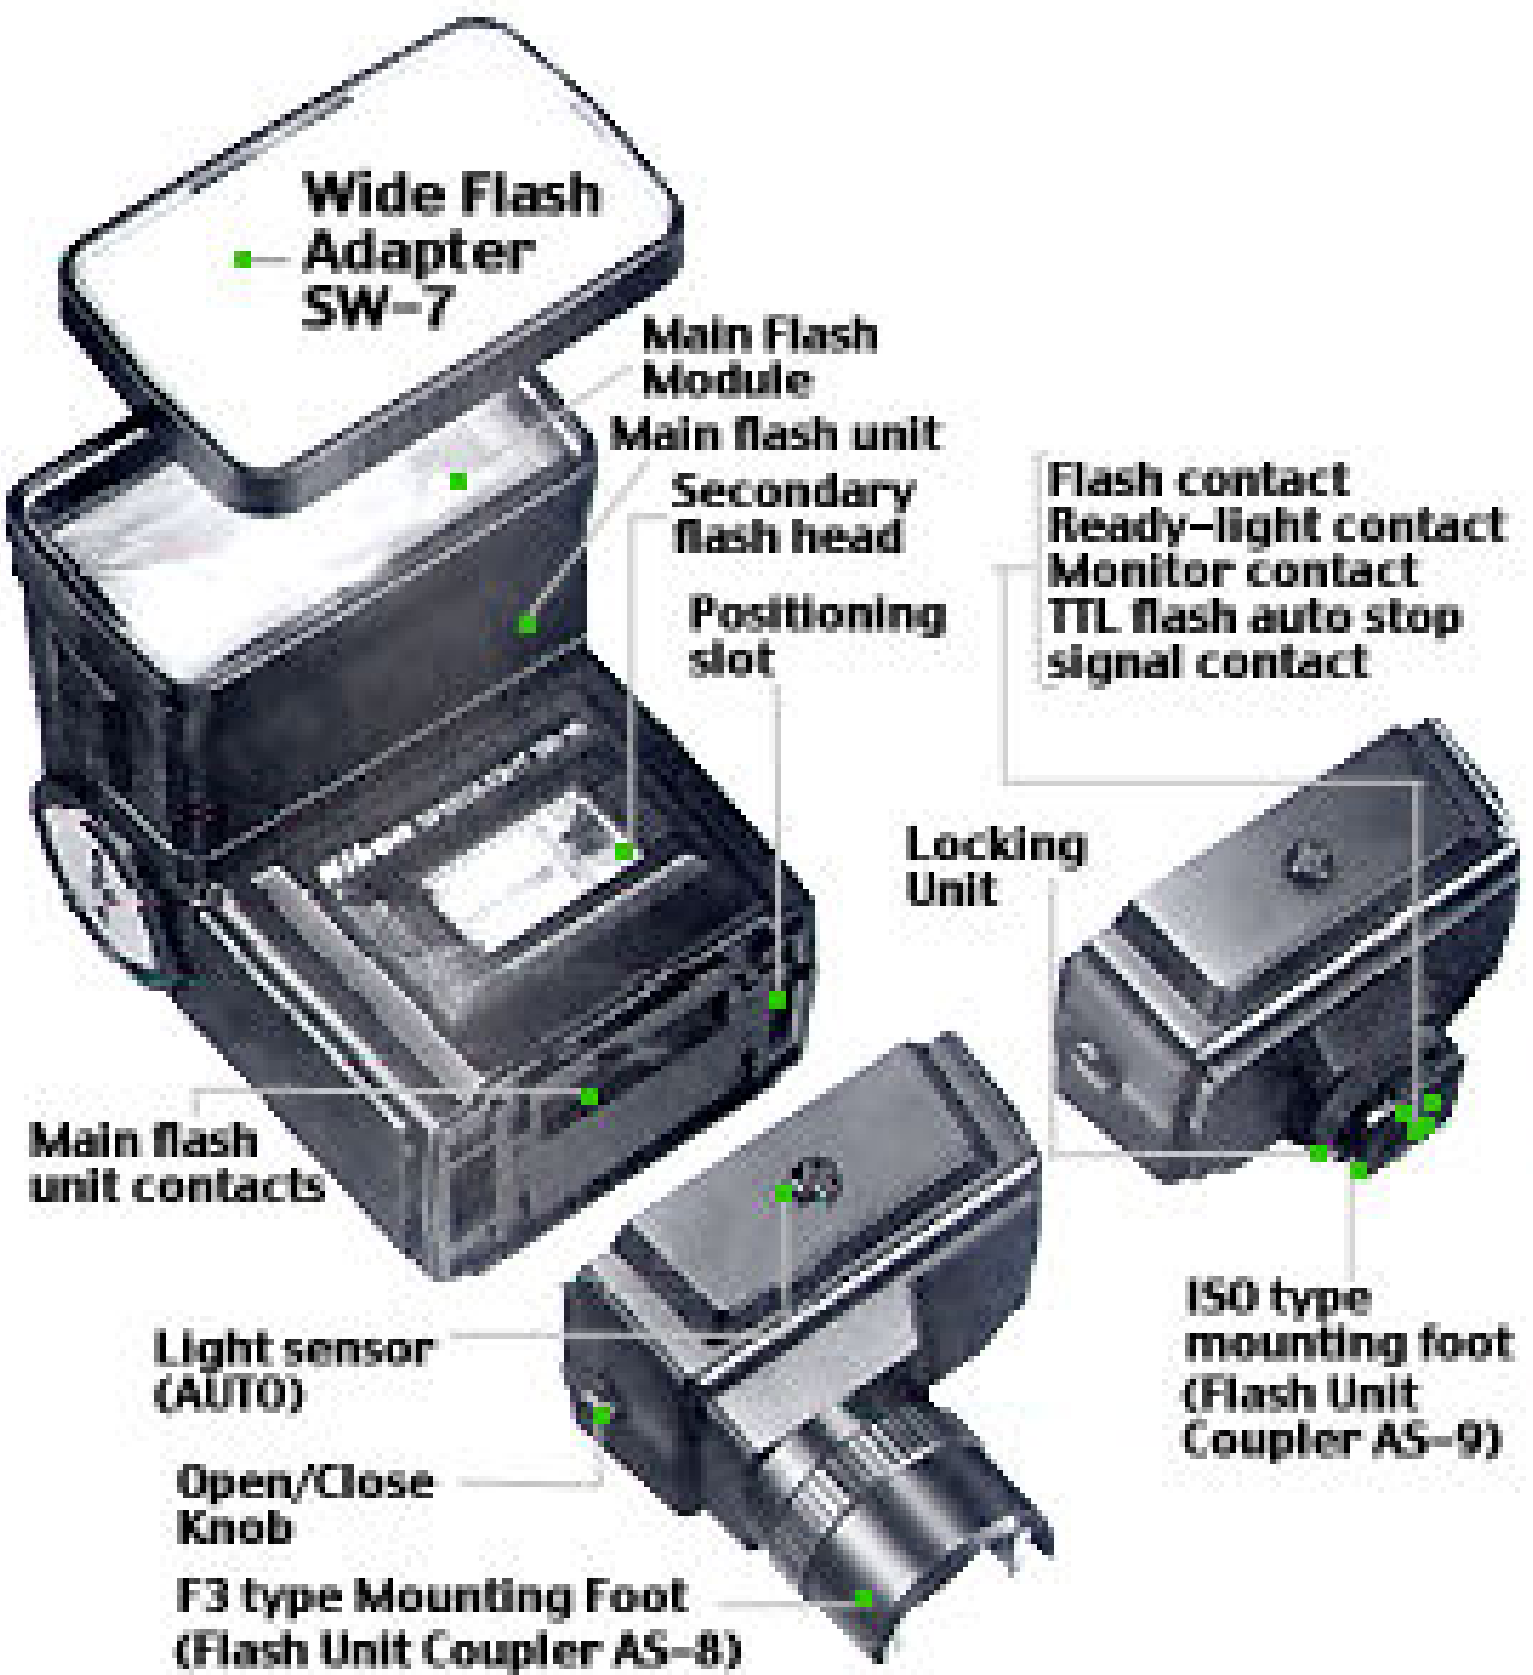

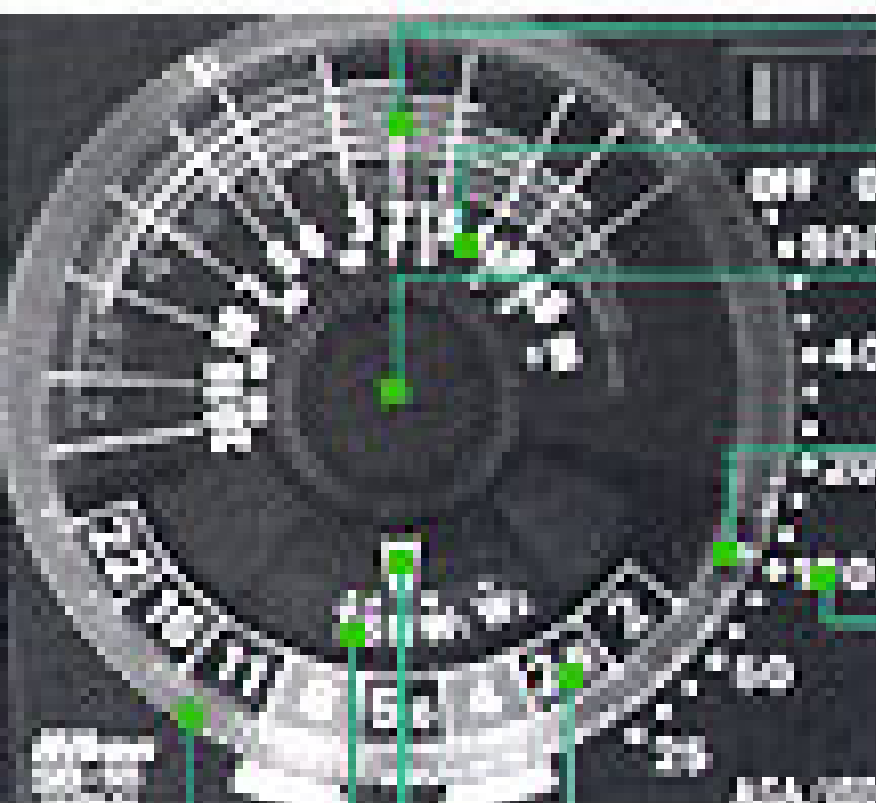

Auto shooting
range indicators
with aperture scale

Distance scale

Zoom setting knob

ASA/ISO
film speed index

ASA/ ISO
film speed scale

Aperture scale for non-TTL
automatic shooting mode

Zoom setting index

Zoom setting scale

ASA/ISO film speed setting ring



SB16B							
	TTL Multi-sensor balanced fill-flash	TTL Matrix balanced fill-flash	TTL	Non TTL Auto	Manual	Rear Curtain Sync	Slow sync
F6				A	M	RFAR	SLOW
F5				A	M	RFAR	SLOW
F4				A	M		
F100/F90x				A	M	RFAR	SLOW
F80/F75/F70				A	M	RFAR	SLOW
F65				A	M	RFAR	SLOW
F60/F50				A	M		SLOW
F55				A	M		SLOW
F3 series 4				A	M		
FM2/FM2n				A	M		
FM3a				A	M		
D1 series				A	M	RFAR	SLOW
D100				A	M	RFAR	SLOW
D2H / D2X				A	M	RFAR	SLOW
D70				A	M	RFAR	SLOW
COOLPIX 8800, 8400,				A	M	RFAR	SLOW
COOLPIX 5000, 5400, 5700, 8700				A	M	RFAR₁	SLOW
COOLPIX 4500/995/990/ 950 ³				A	M		SLOW

The SB16A can only be used with the Nikon F3 series and provides the same functions listed above for the F3 and AS17 TTL adapter.

