










0000 0.0




ISO



30

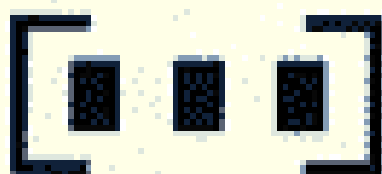


MF



-2.1.0.1.2+



FUNC.


















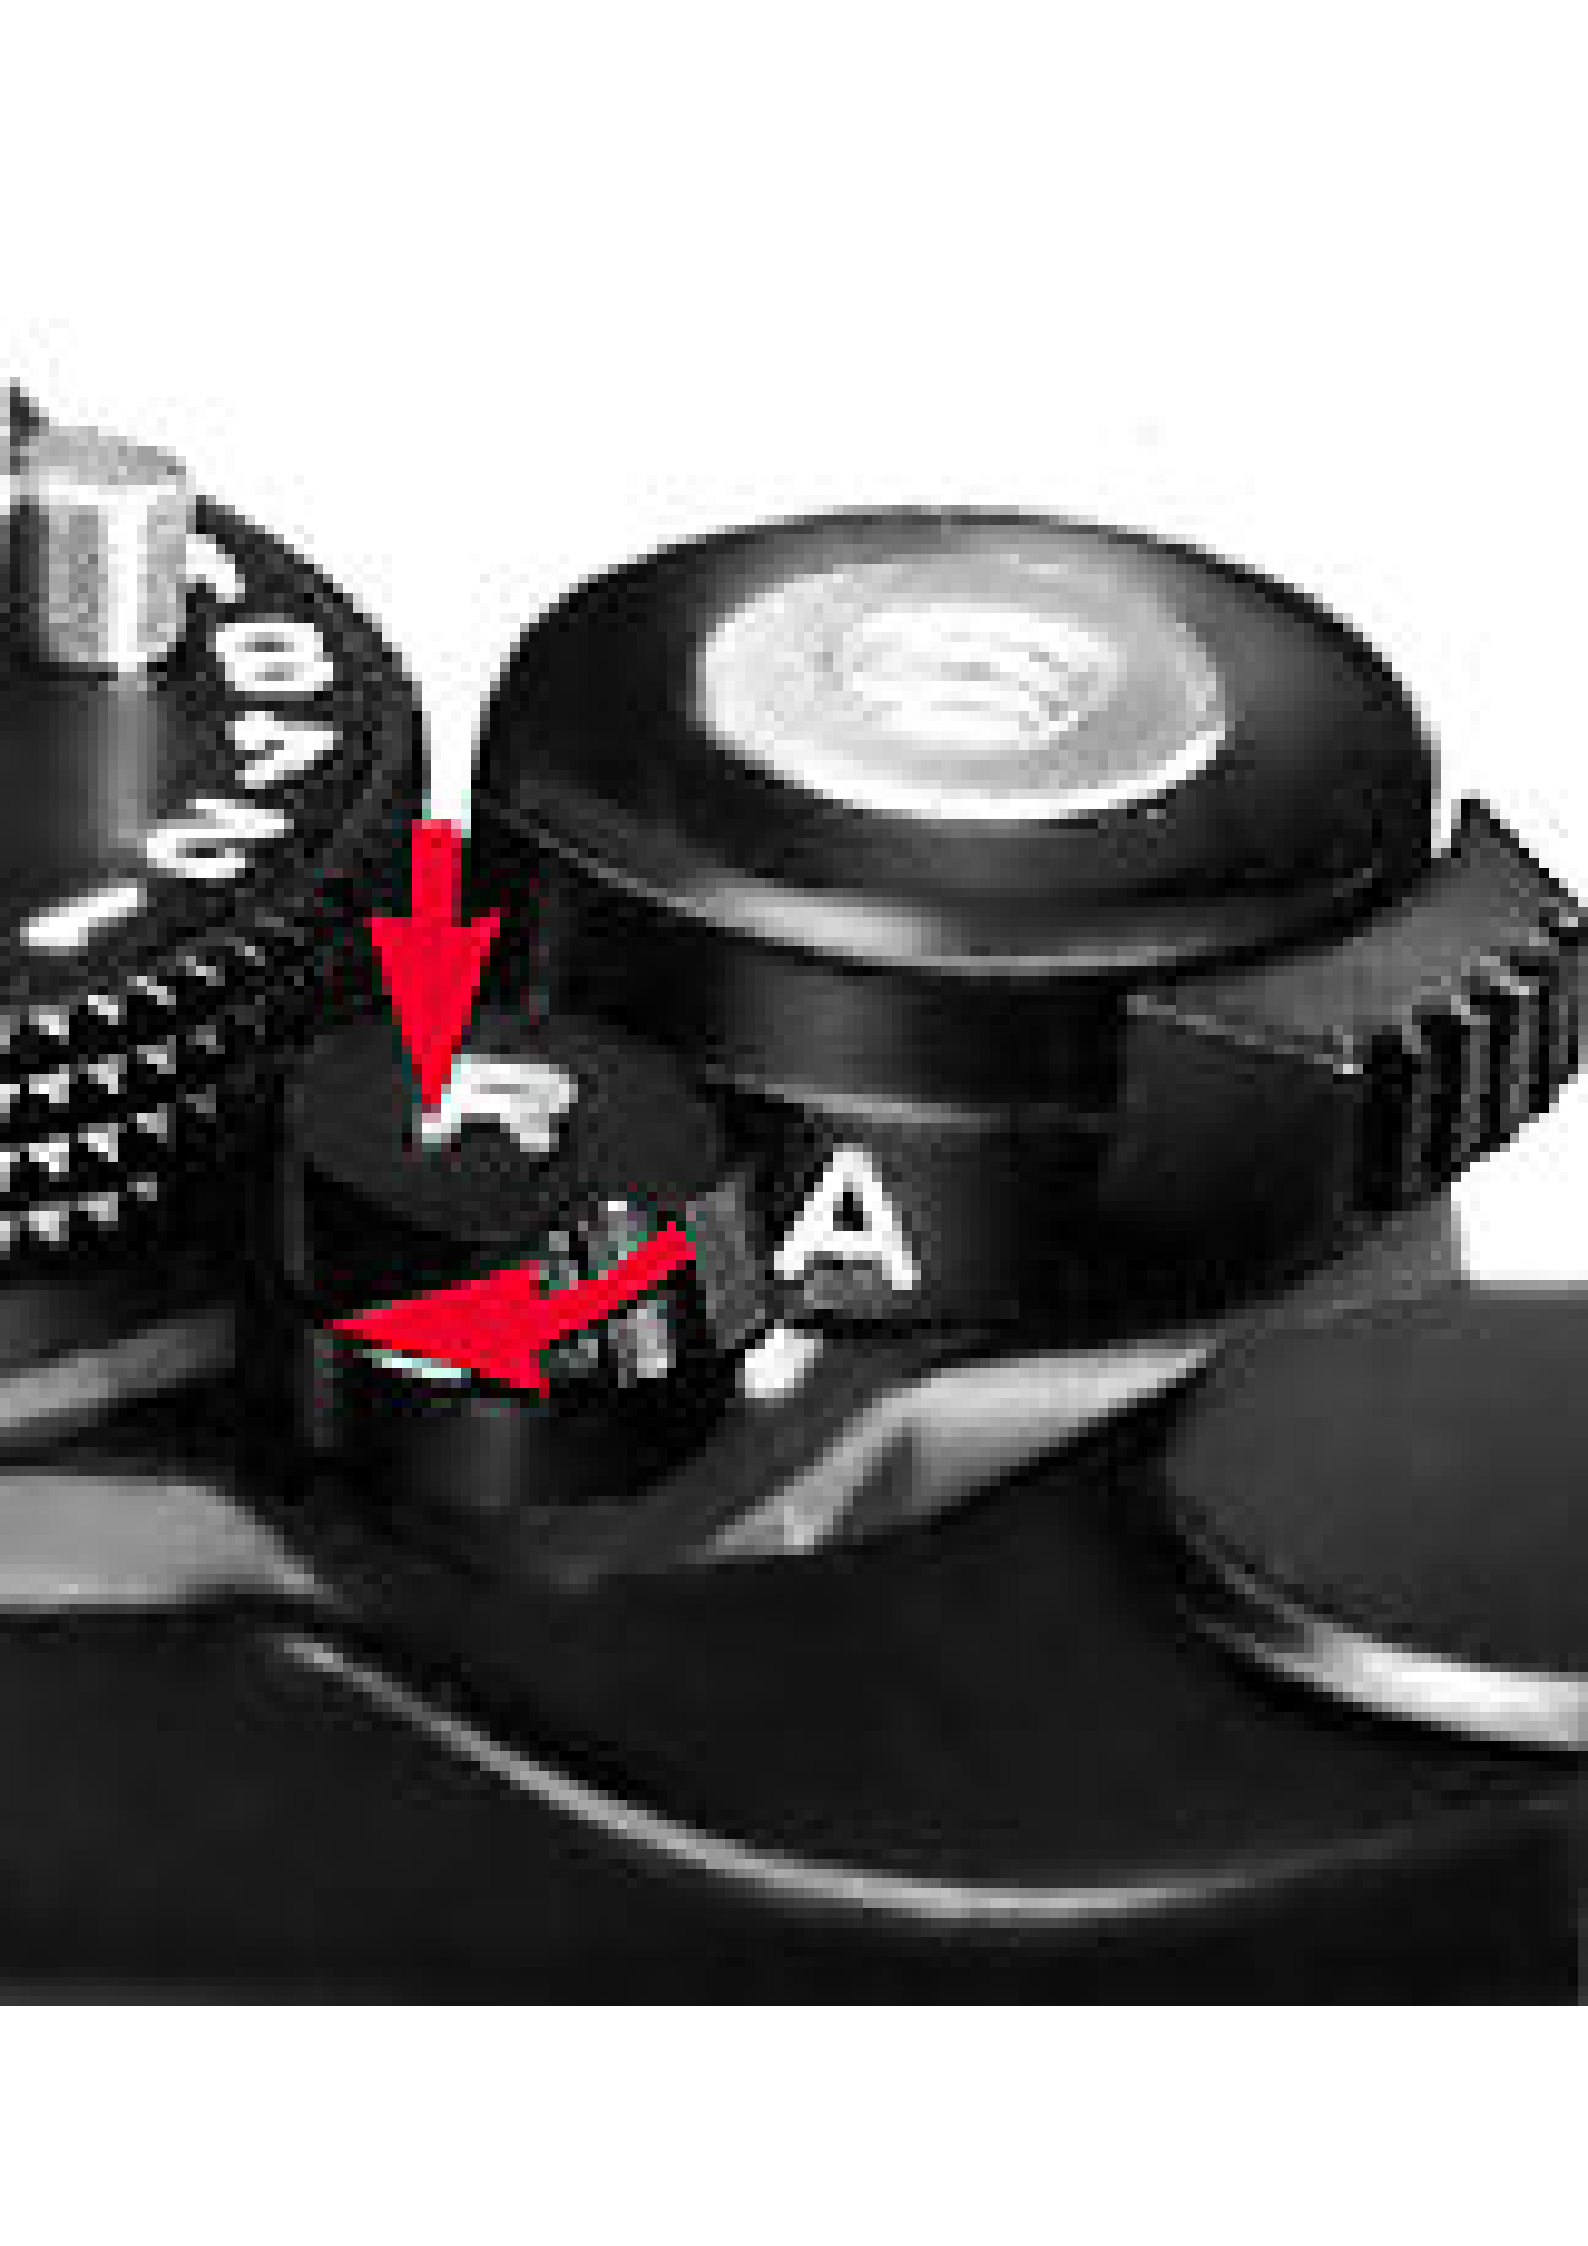

















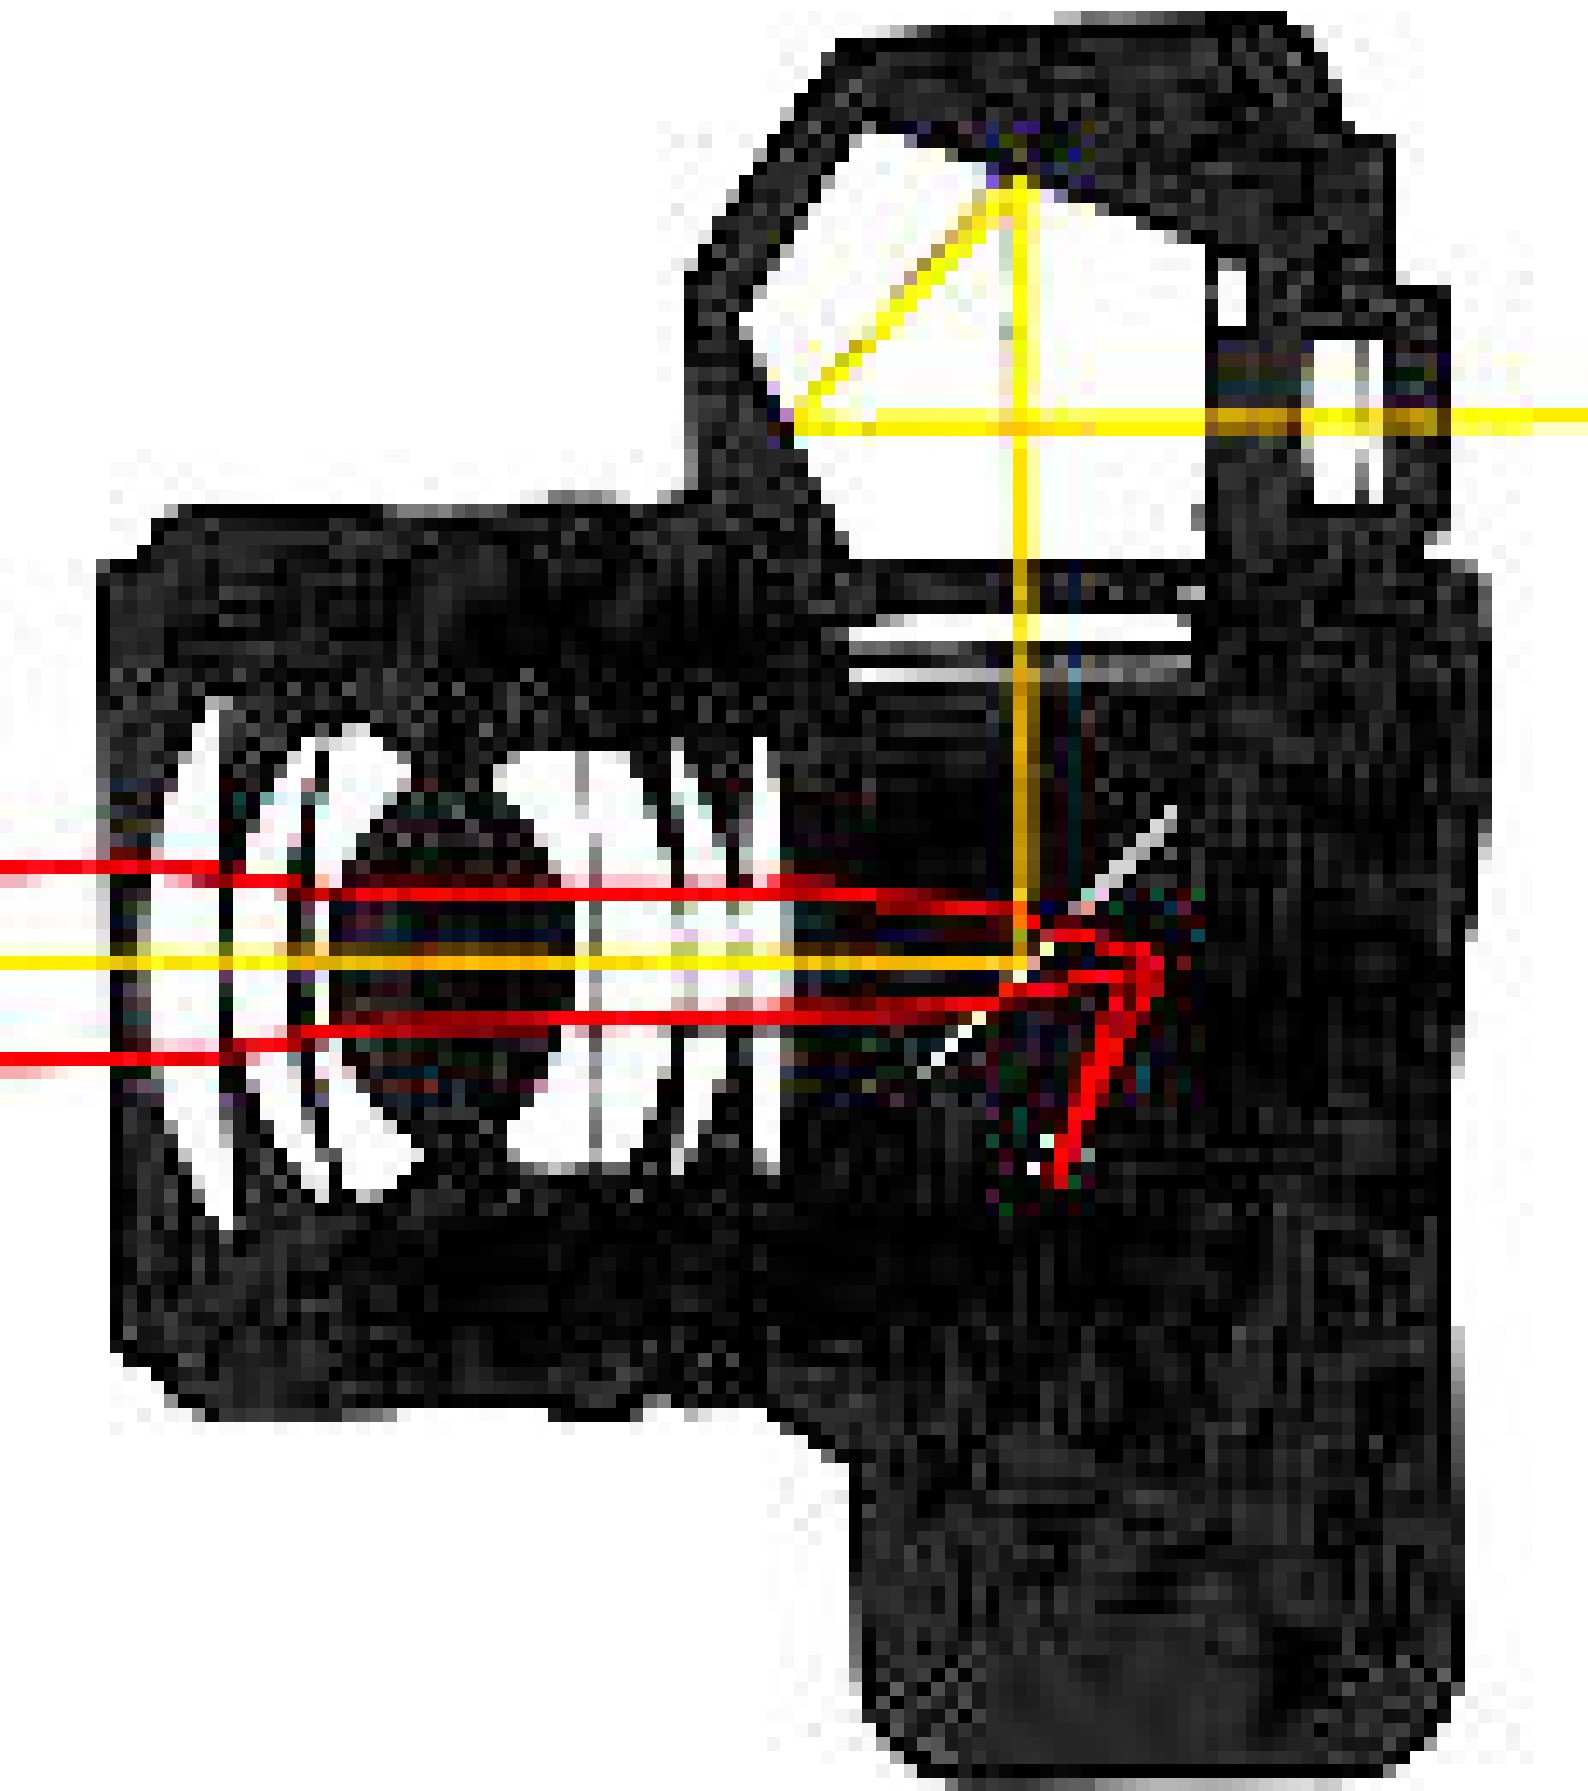


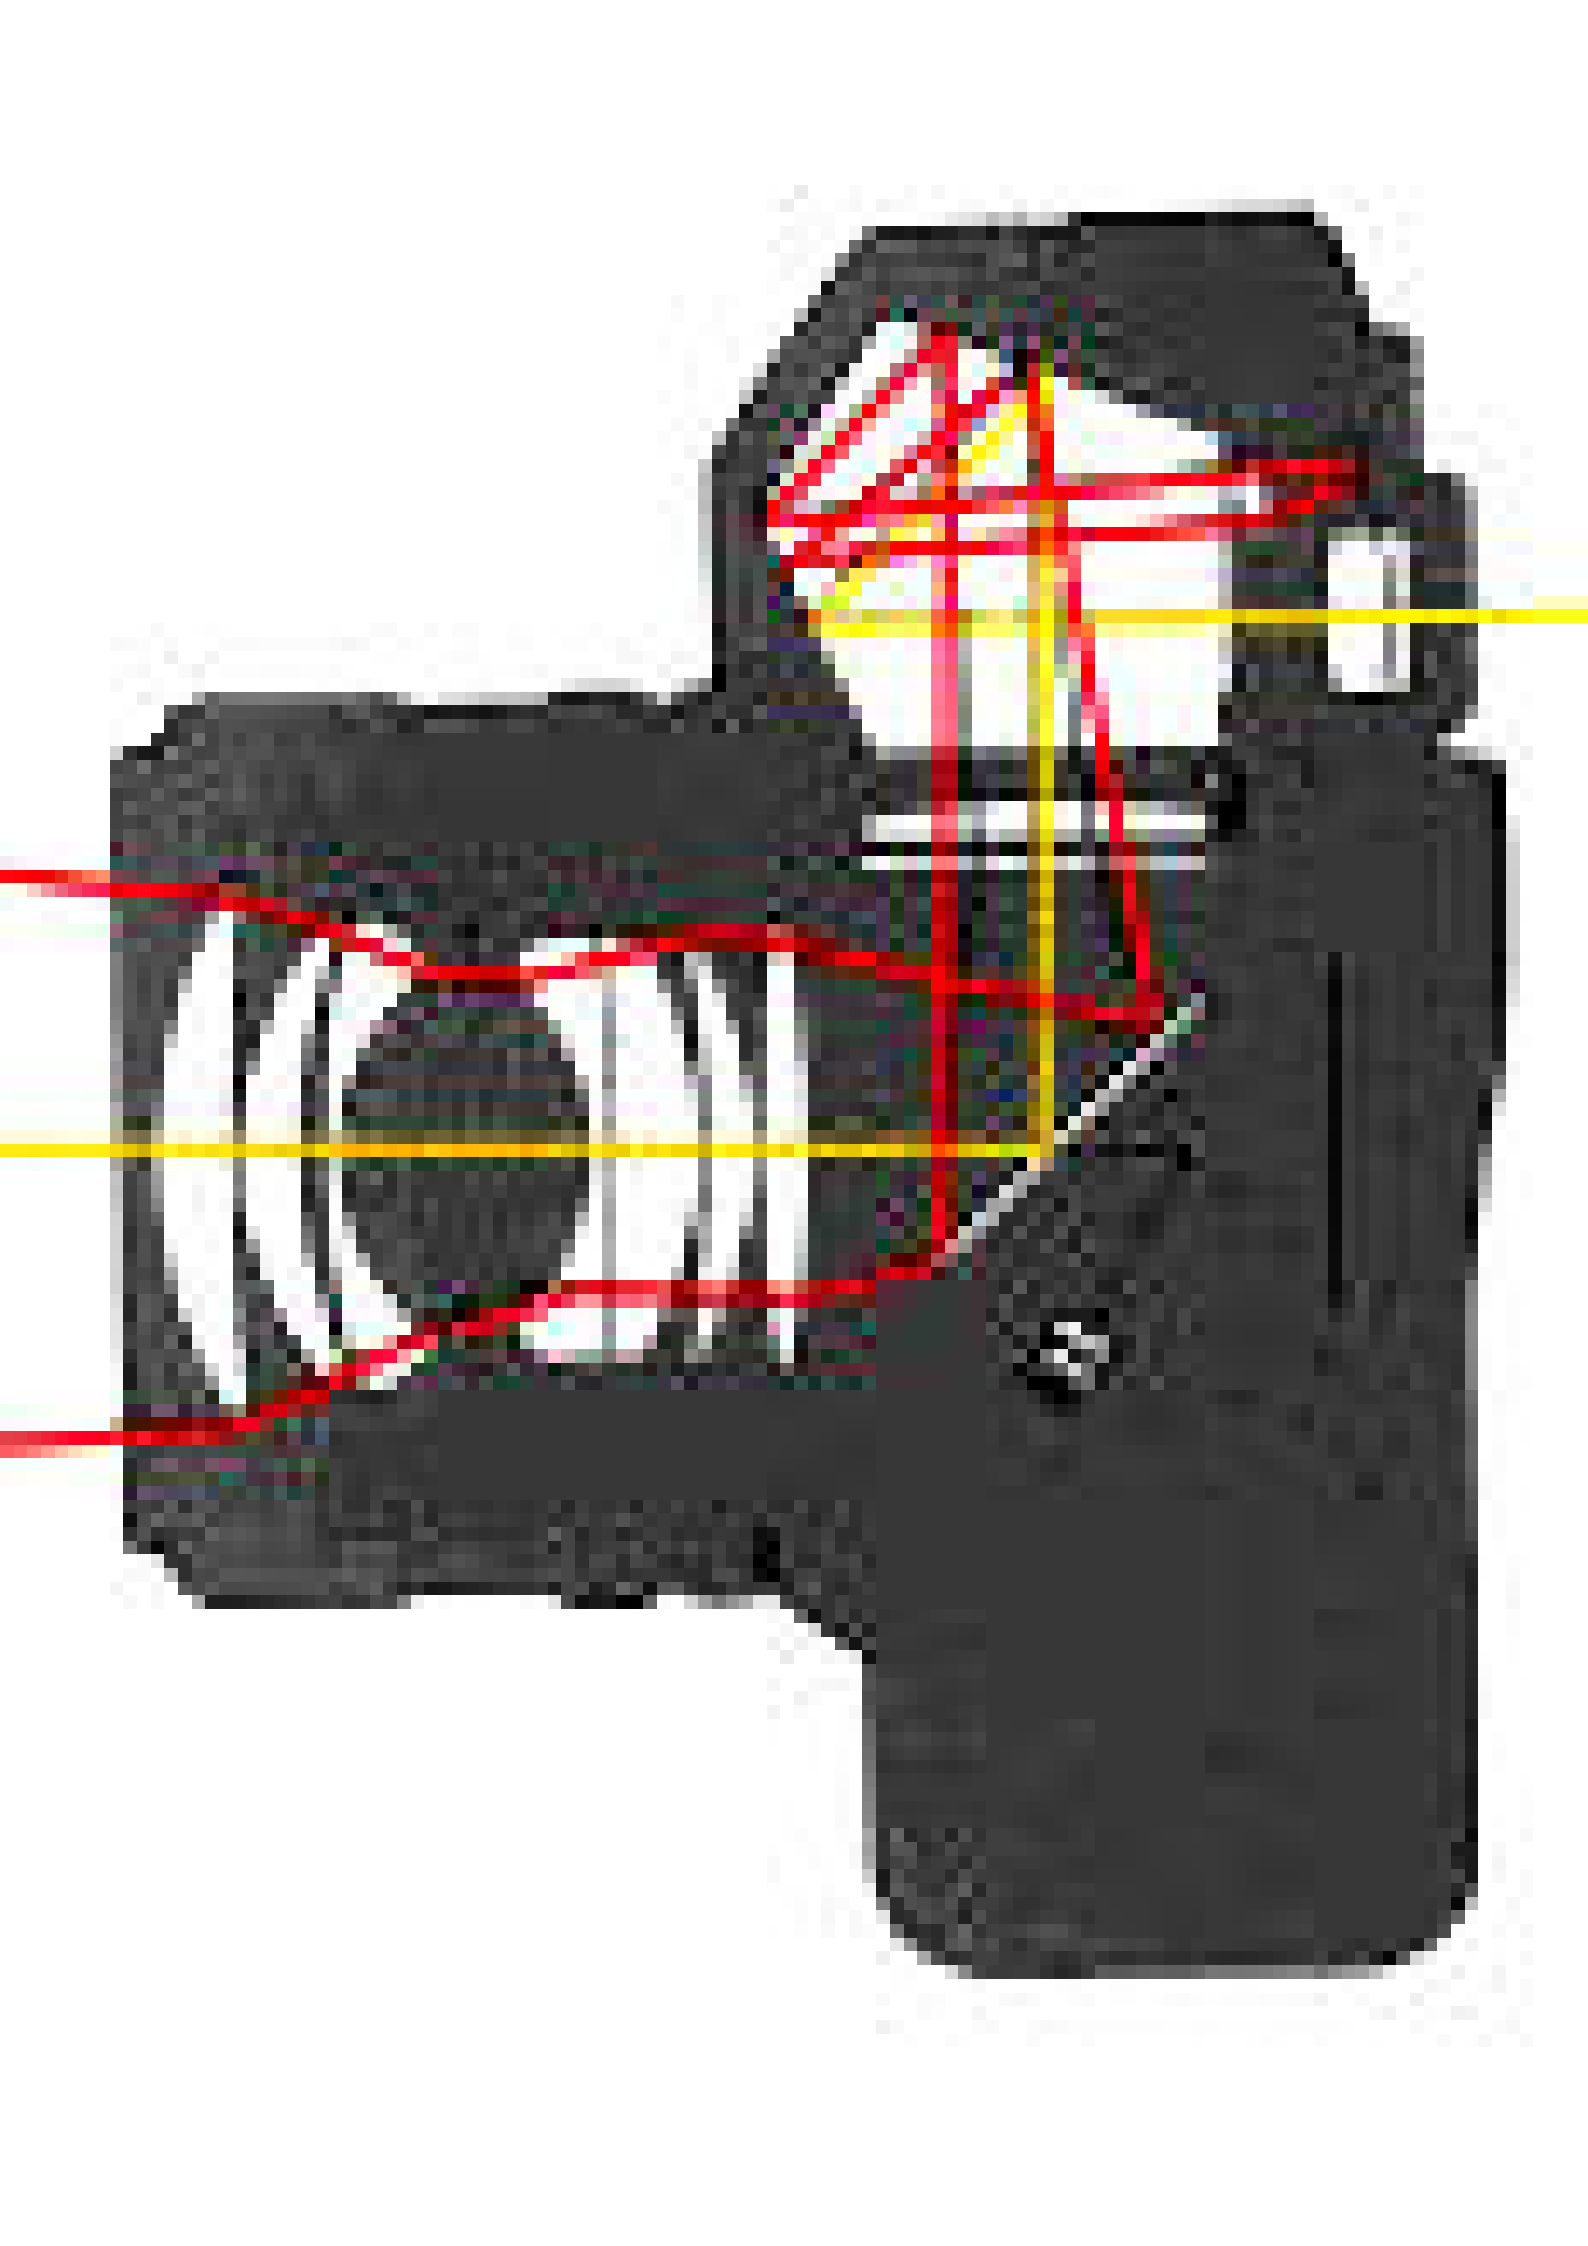

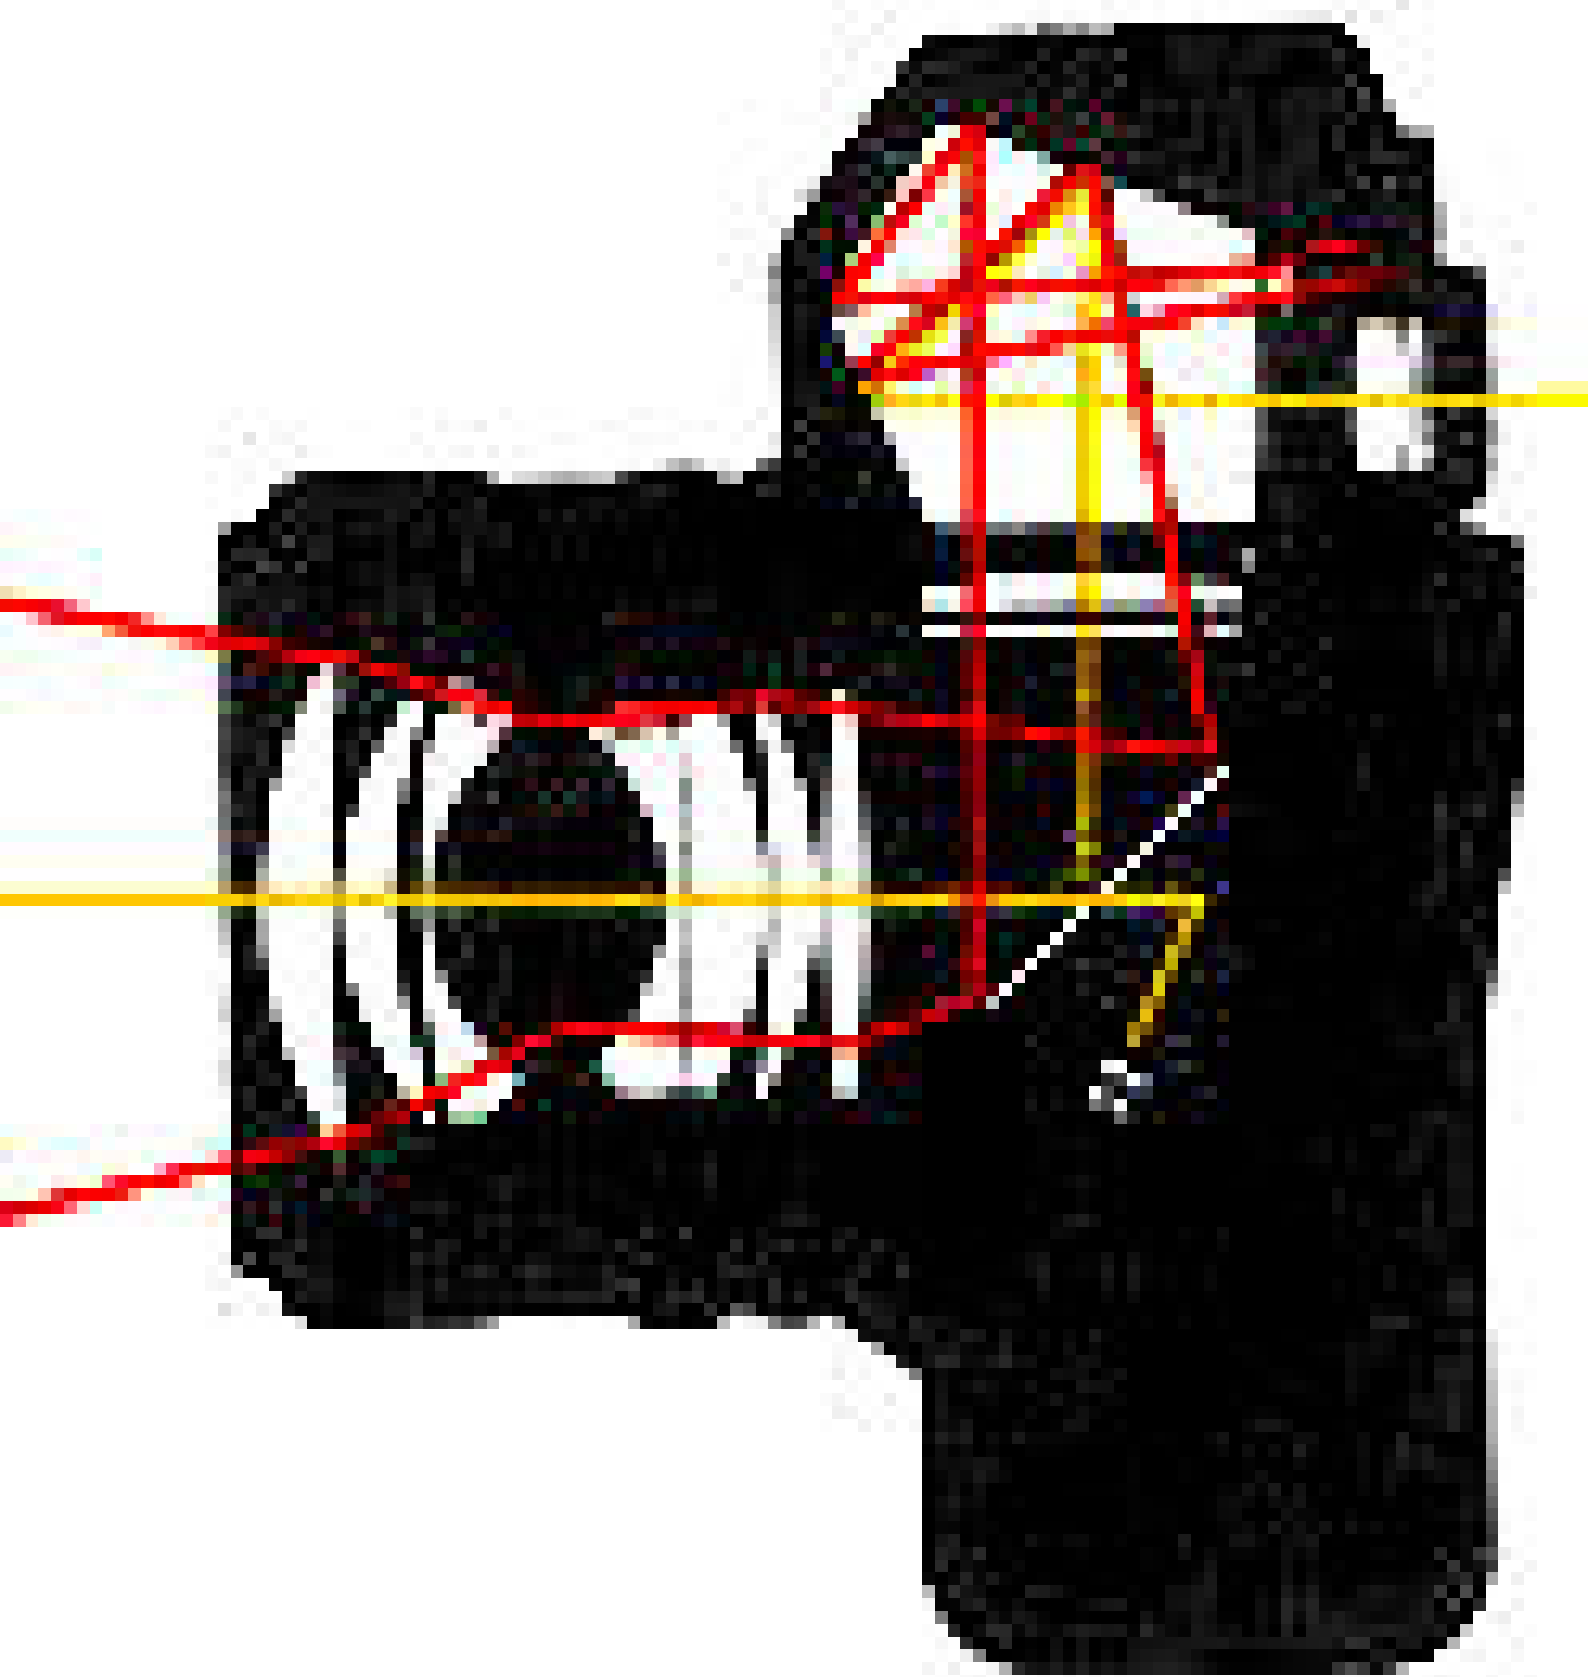

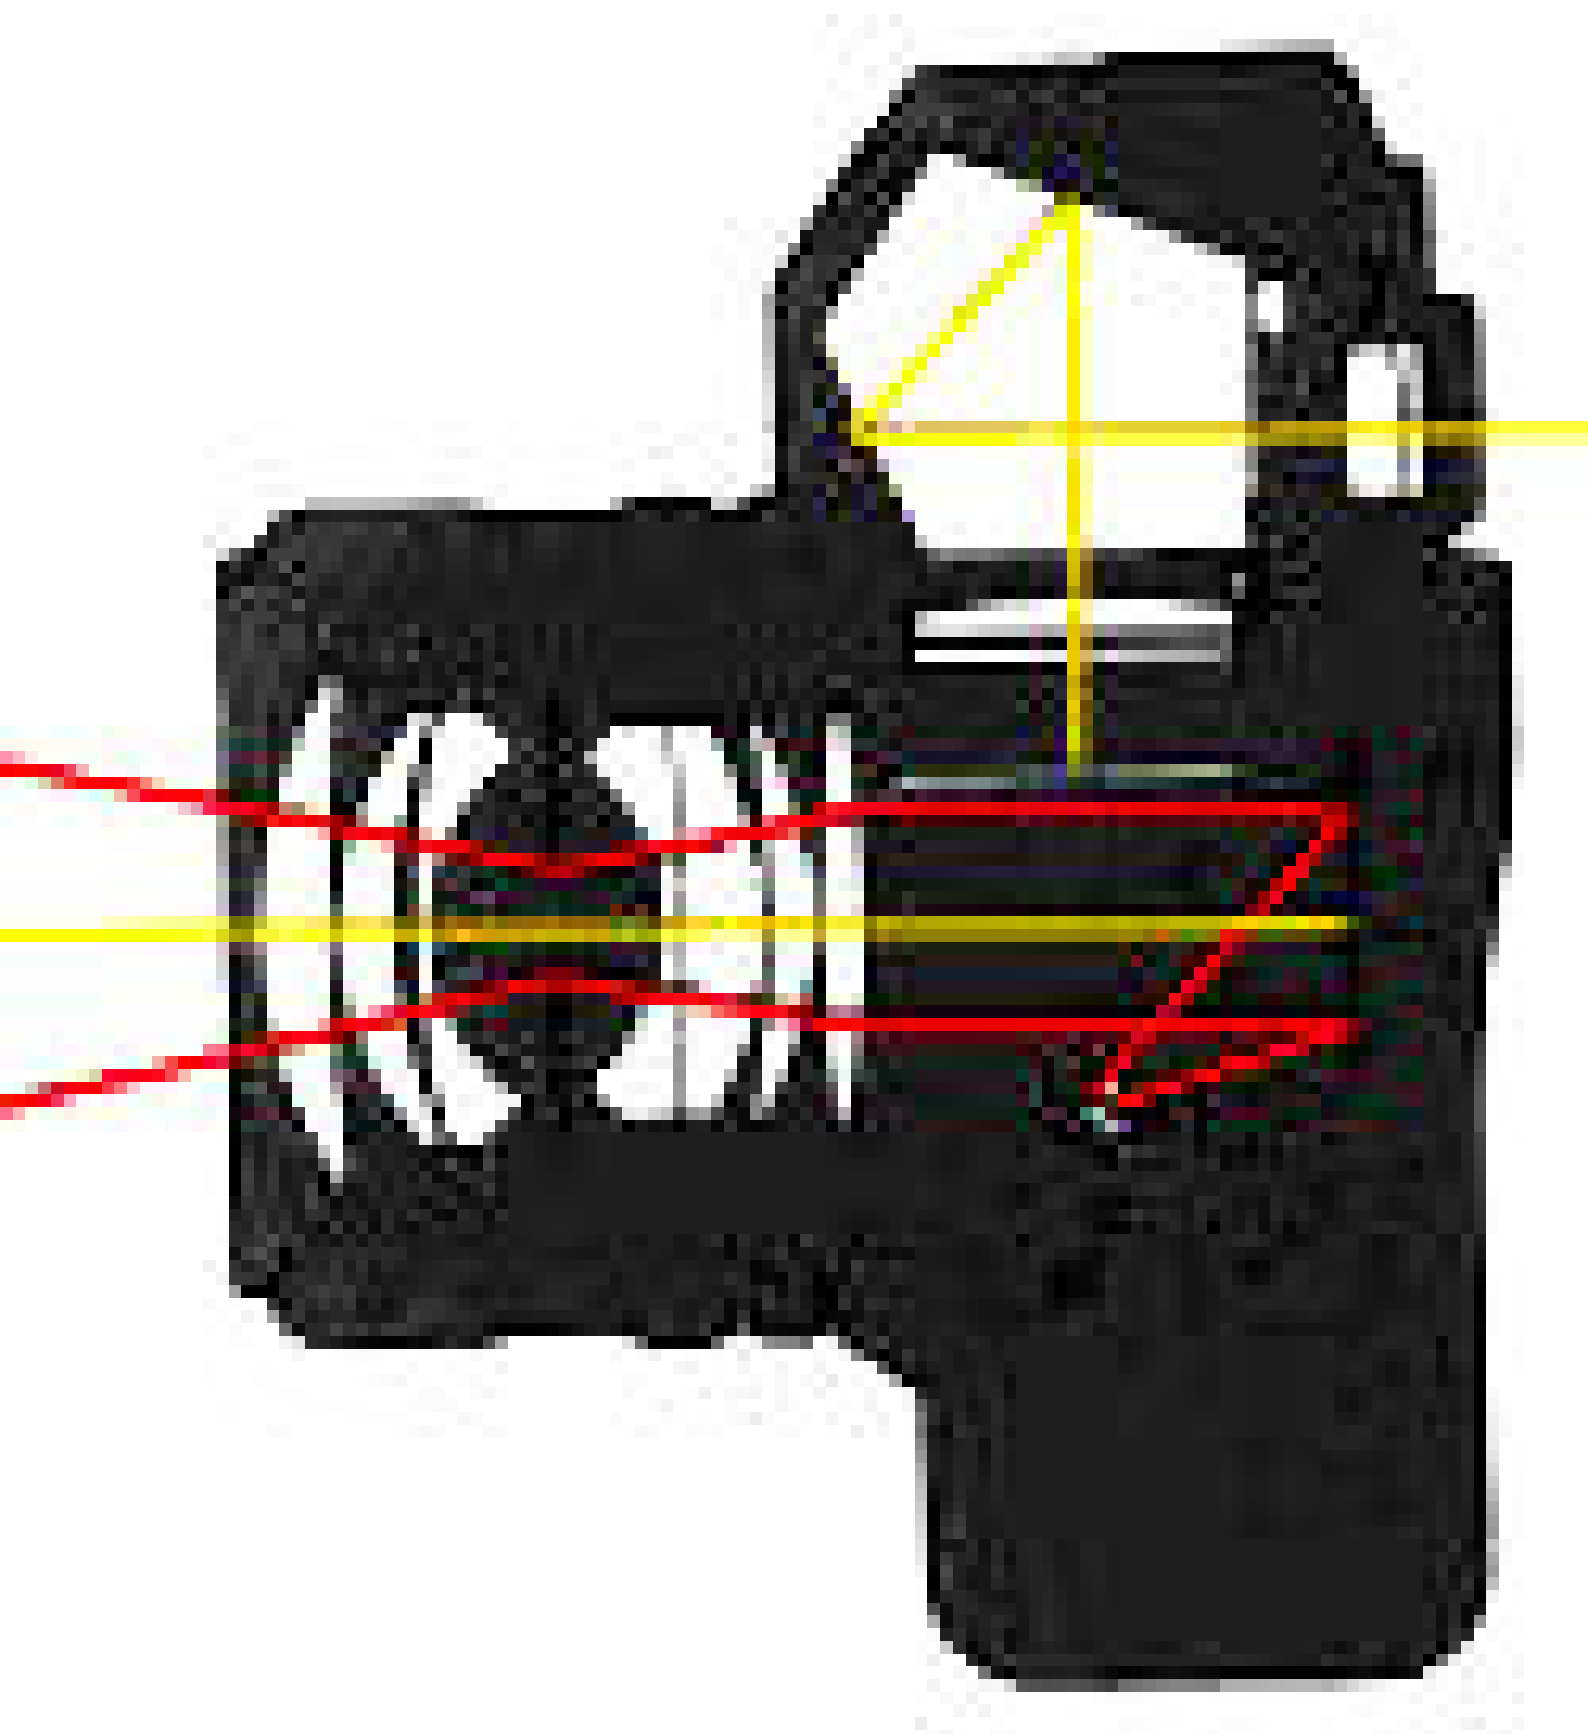



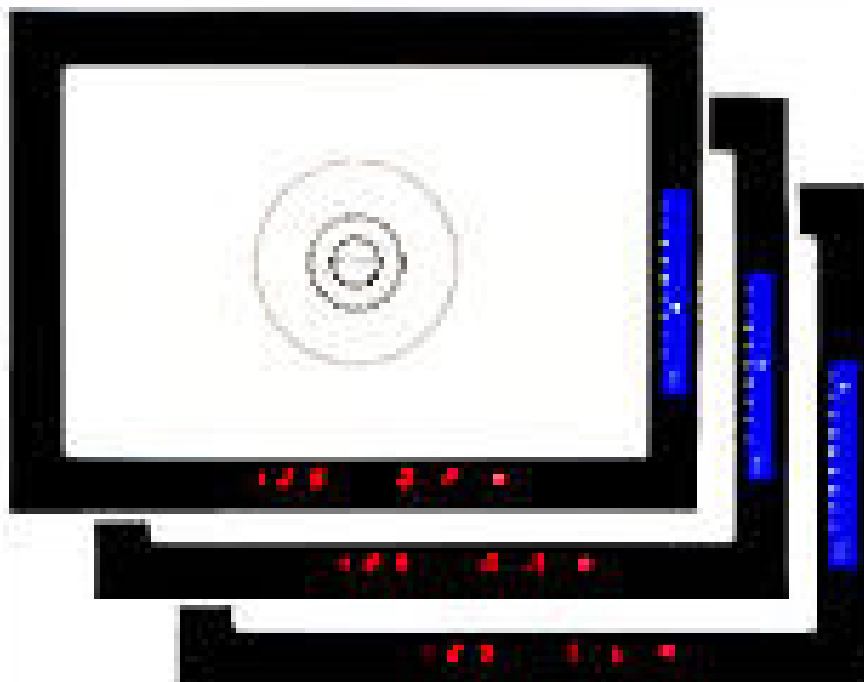

Fixed-Index Adjustment

When shooting on manual, press the shutter button half-way after pushing in the Stop-Down Lever. The correct exposure is displayed by **20** at the bottom of the viewfinder. Overexposure (**OL**) and underexposure (**OP**) are also indicated.




EOS Kiss (1993)

New EOS Kiss (1996)








• 0 0 0 0 0 0 0 0 0 0



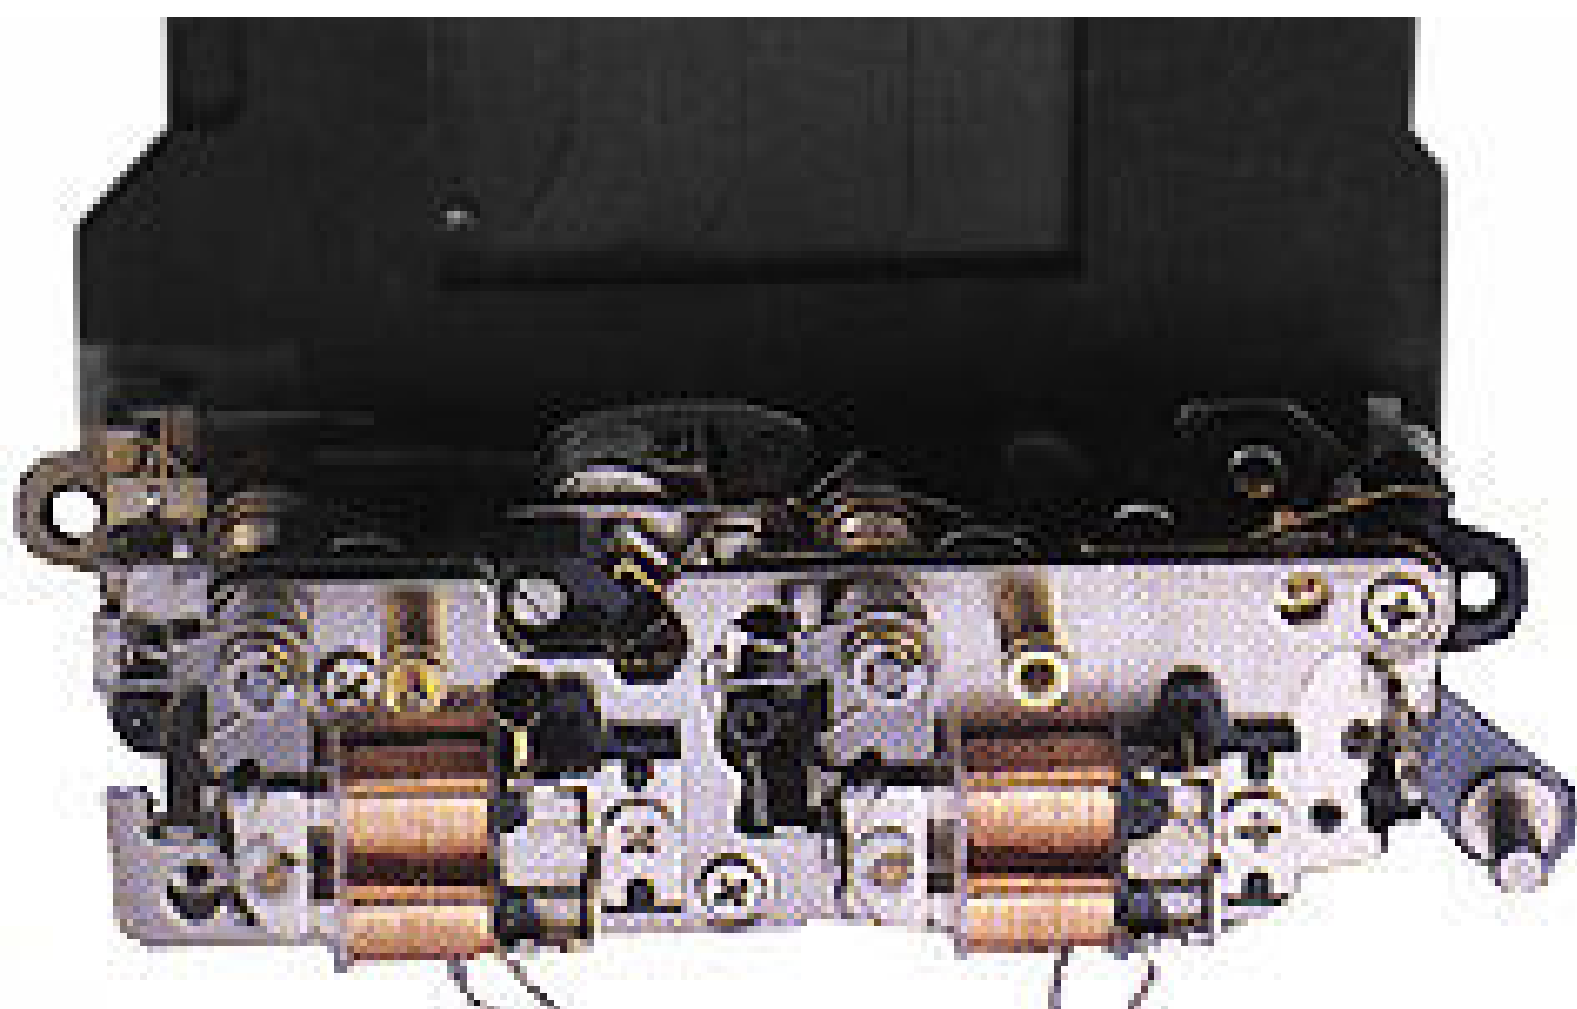





Canon

EOS


REBELG / REBELG CD



English Edition
INSTRUCTIONS

1. Film Speed


(8-bit information)

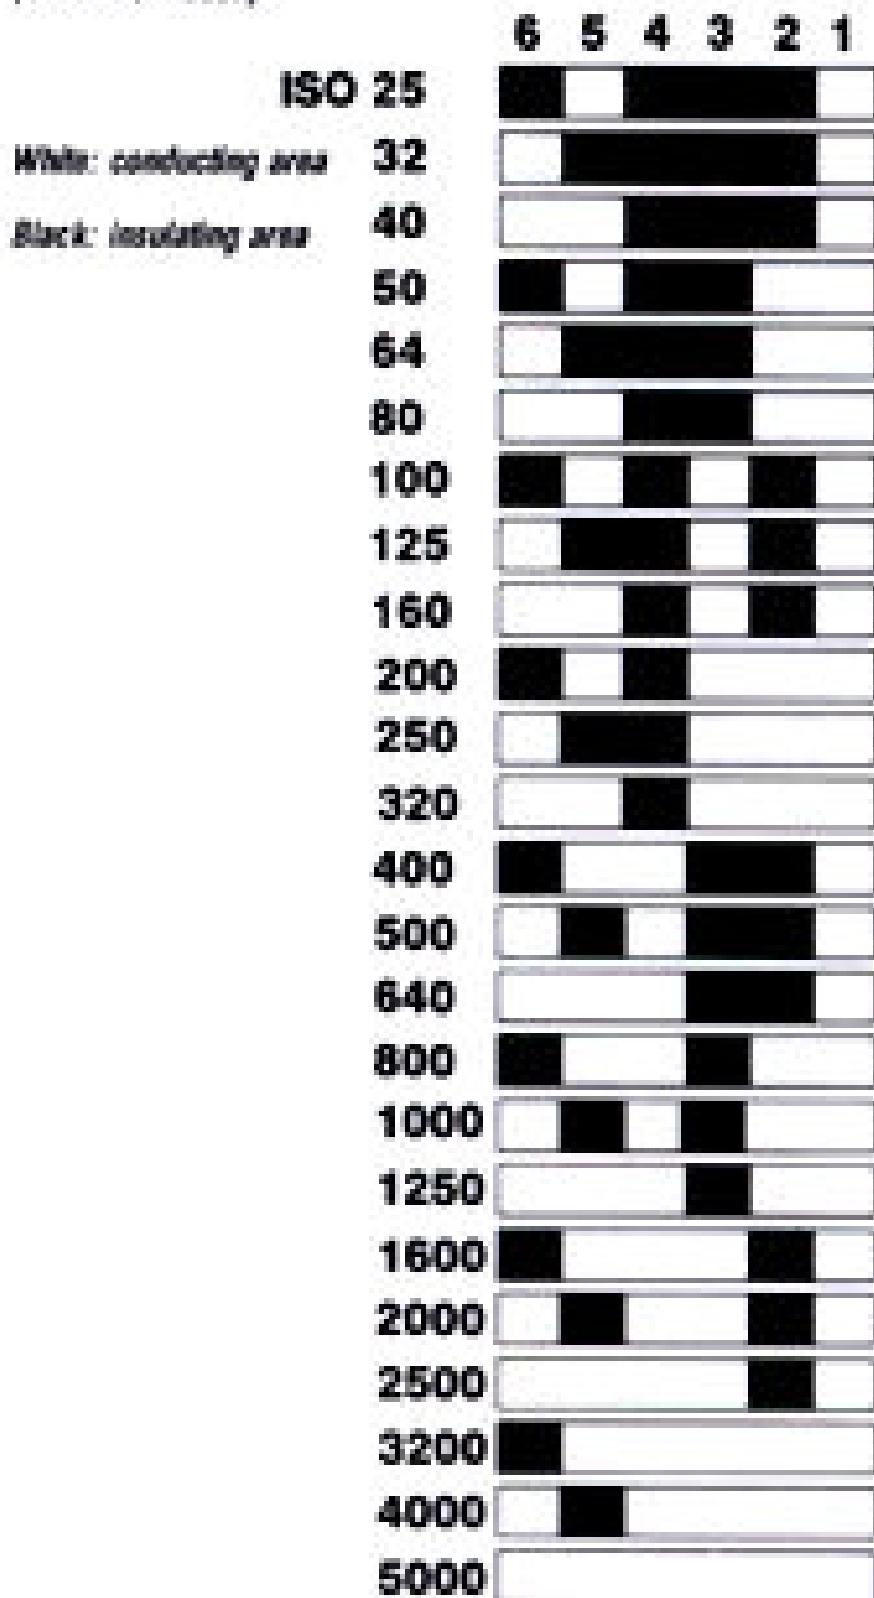

(Nos. 1 and 7 are COM terminals)


2. Number of Frames

(3-bit information)

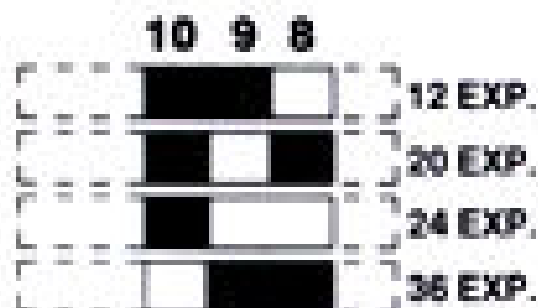



Canon T90

MULTIPLE METER SYSTEM
COMPUTERIZED 35mm SLR FOR EXPERTS

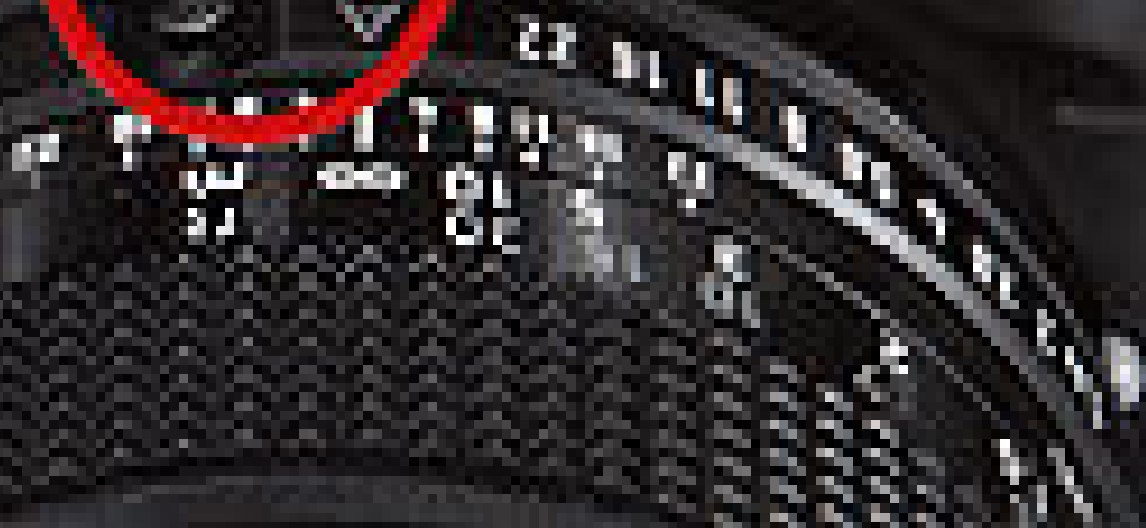





OK

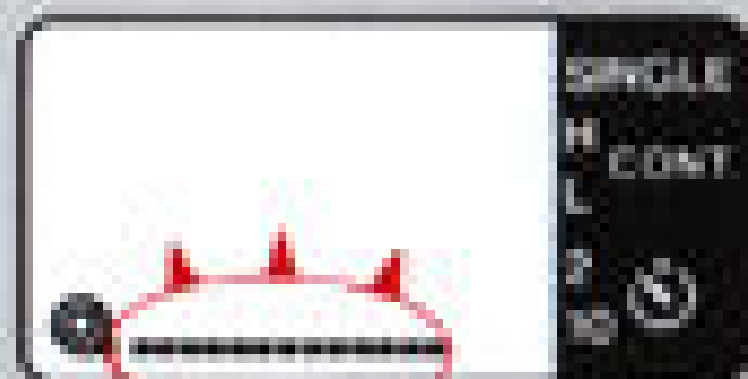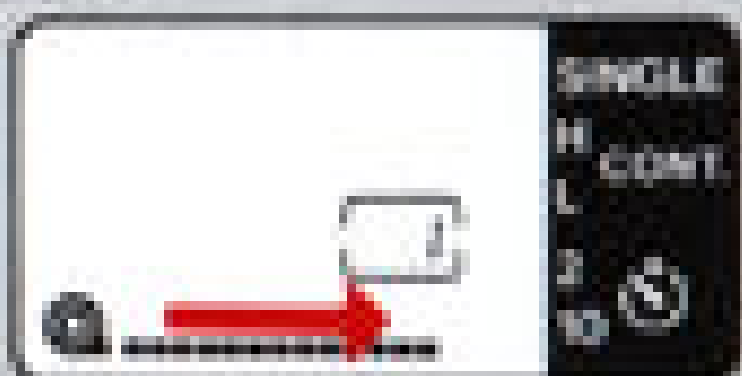

X

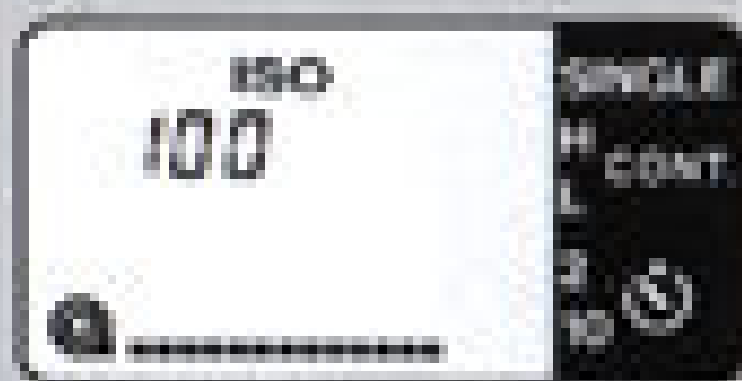

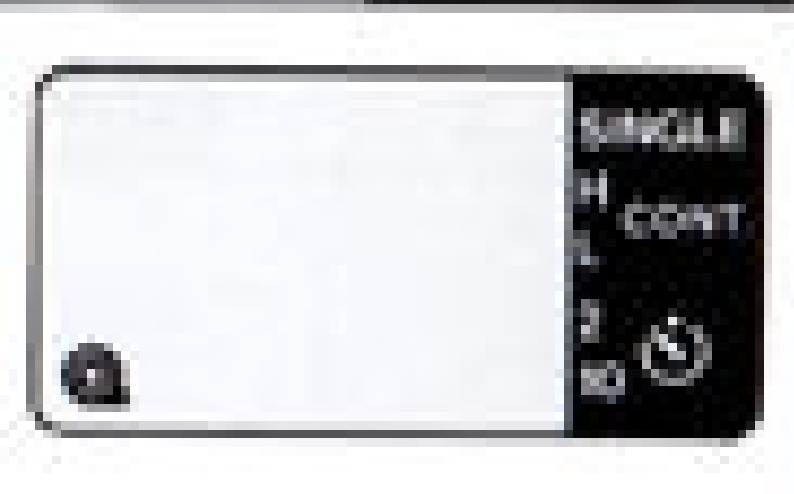






Correct exposure

1 2 5 5.6

Incorrect exposure


8 1.4



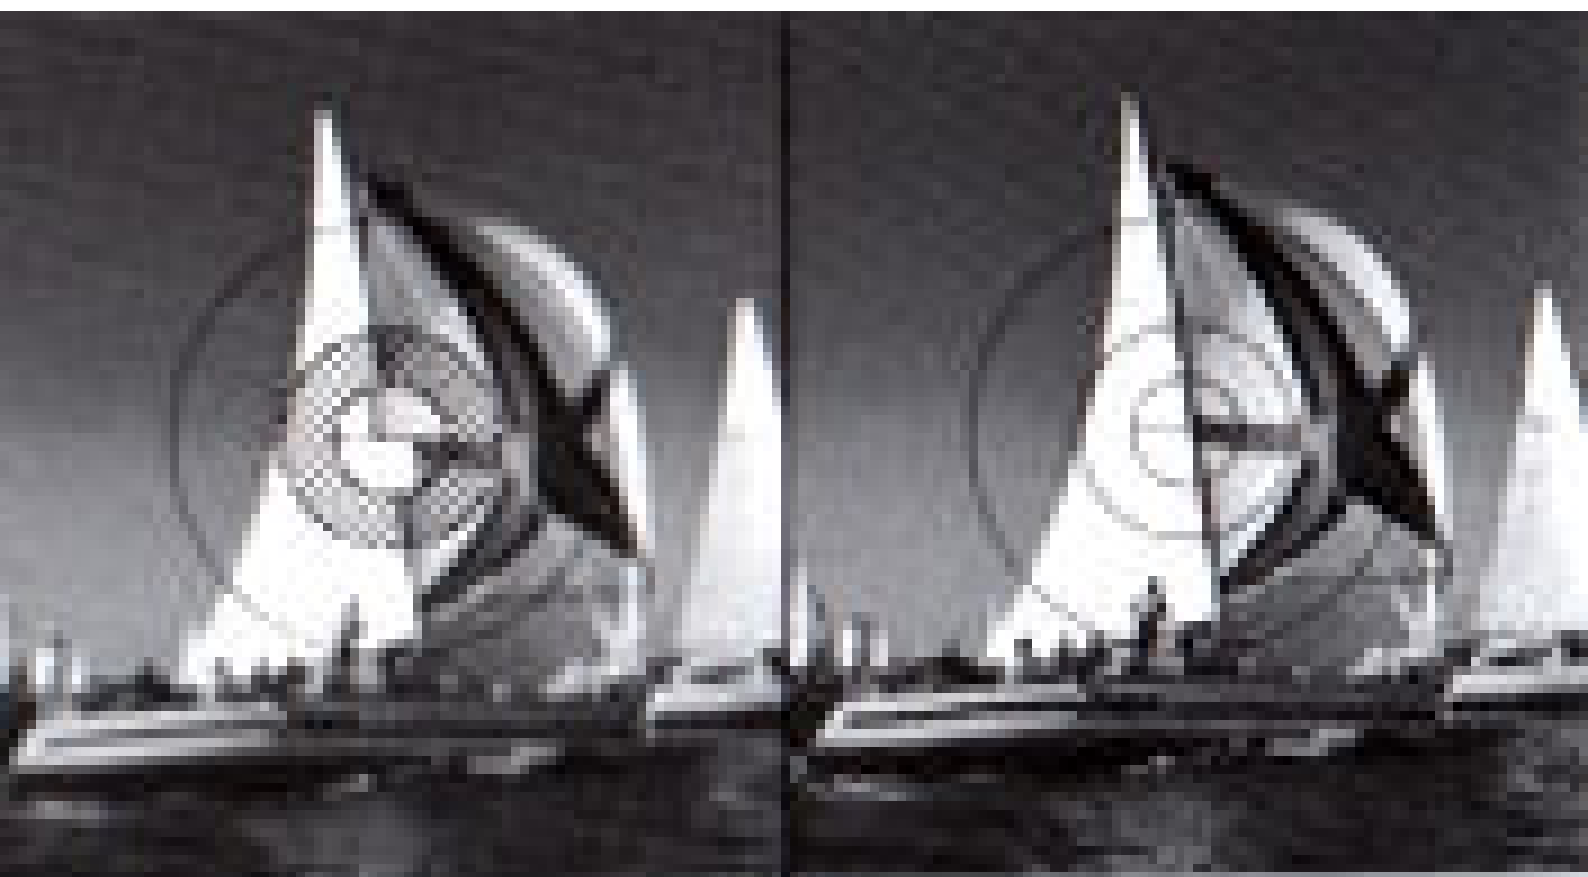

(Out of focus)

(In focus)

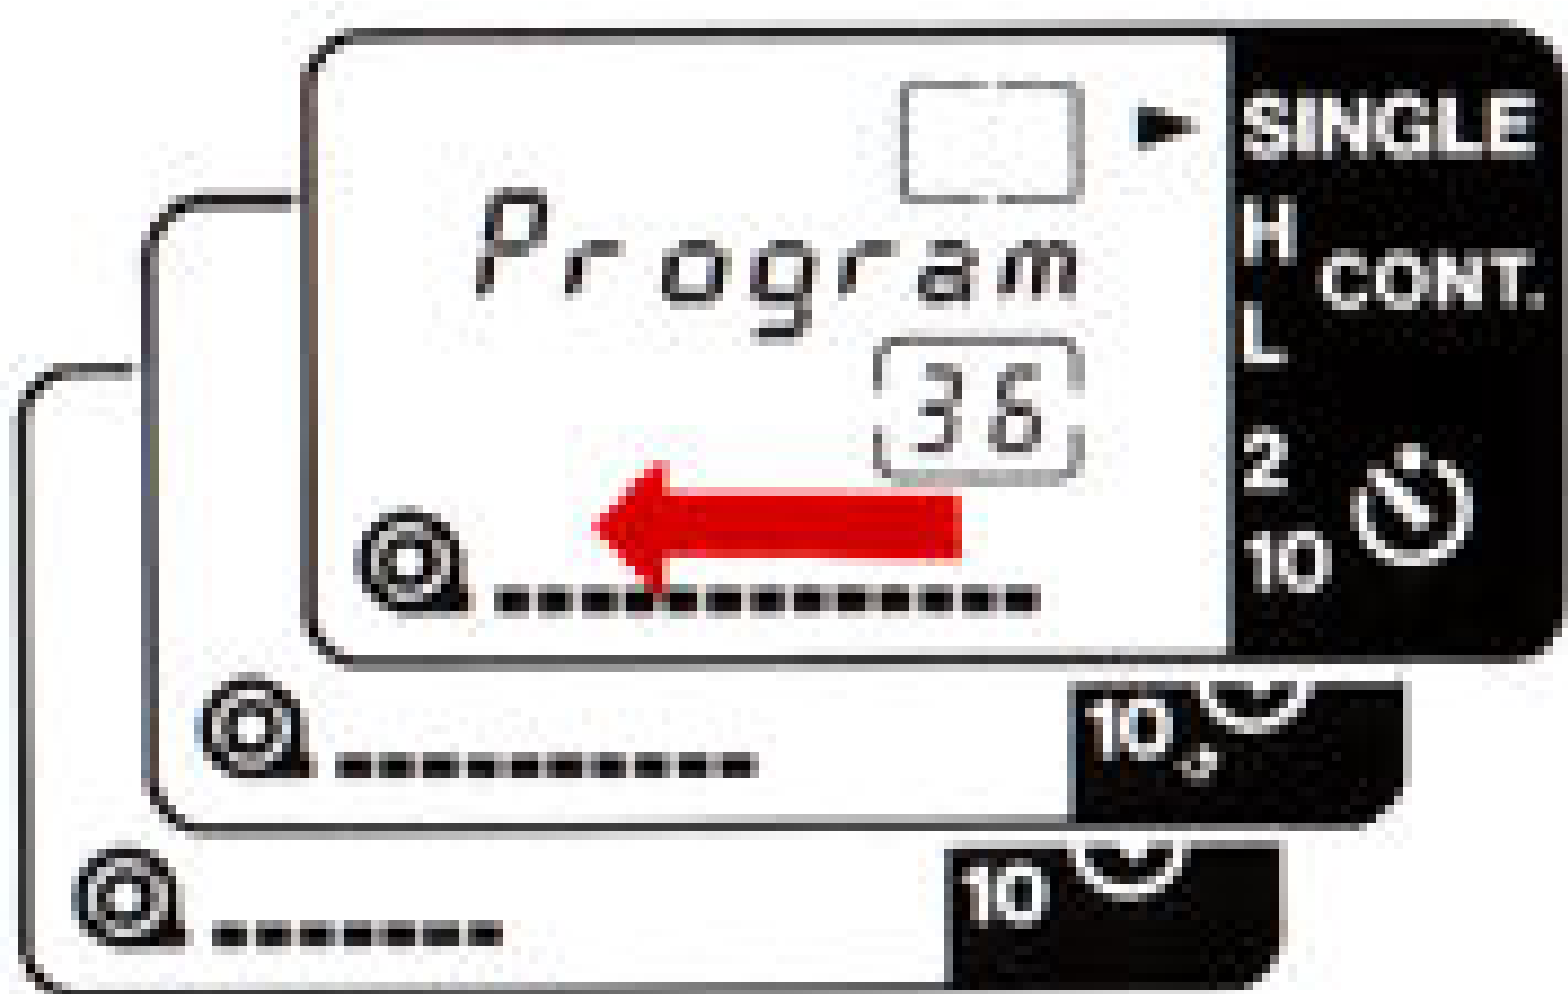






Be sure to place the lens with its front end down to avoid damaging the protruding pins.

Nikon

MA-7A-13



Canon T90

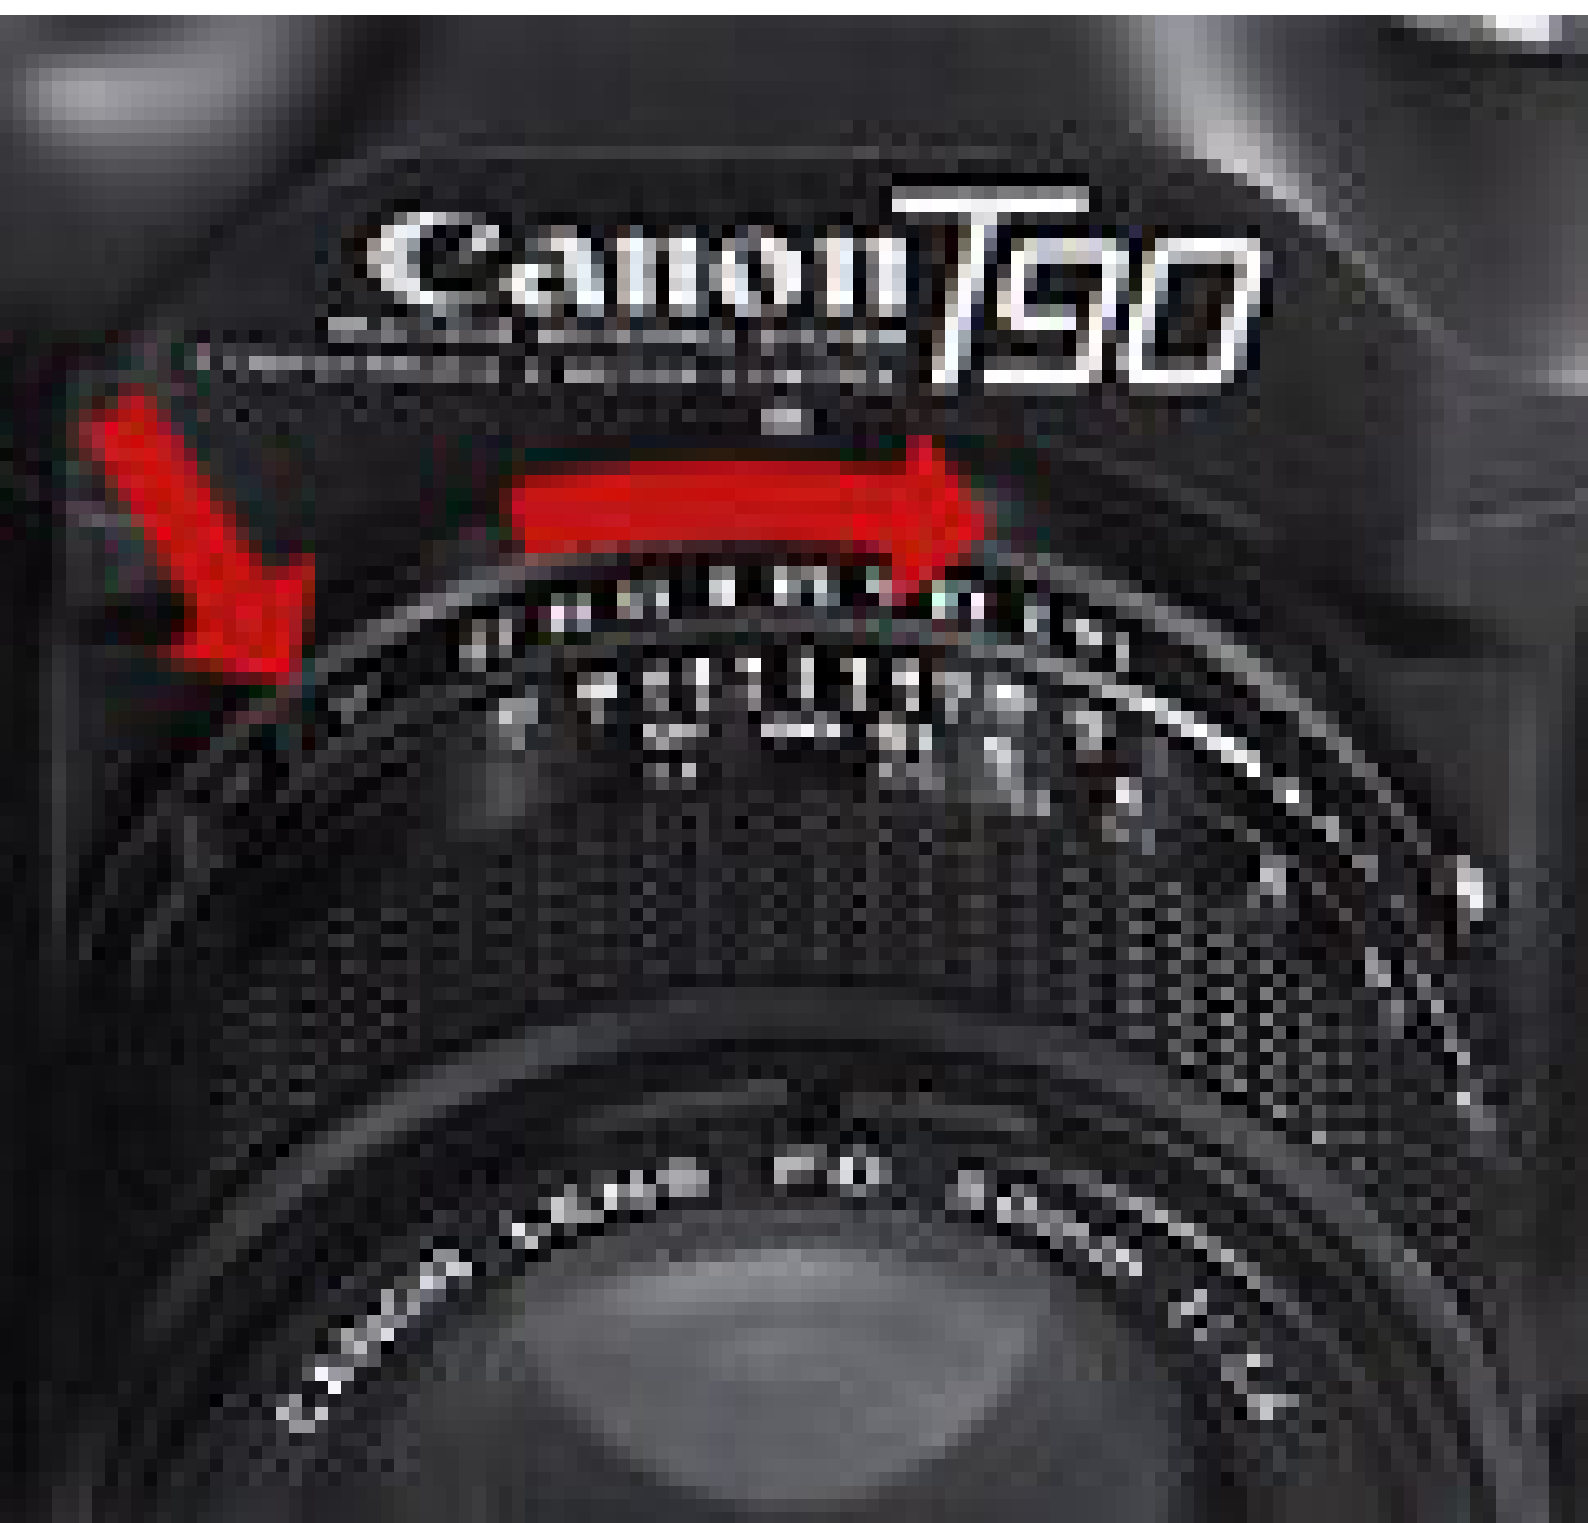

Canon T50



T50

Program



$\frac{1}{4}$ $\frac{1}{2}$  2 4

SINGLE

H

CONT.

L

2

10



bc

■■■ ■■■

SINGLE

H

CONT.

L

2

10



b c

... ..

SINGLE

H

CONT.

L

2


10





(blinking)

bc

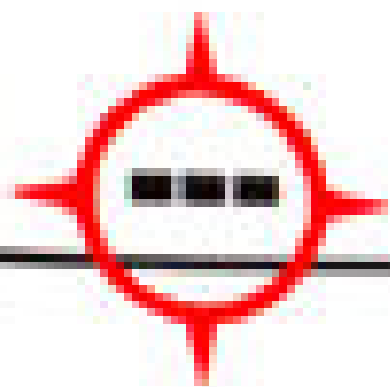

SINGLE

H CONT.

L

2

10



bc

SINGLE

H

CONT.

L

2

10










1. This is a copy of the original
document. It is not a
copy of the original document.
2. This is a copy of the original
document. It is not a
copy of the original document.
3. This is a copy of the original
document. It is not a
copy of the original document.
4. This is a copy of the original
document. It is not a
copy of the original document.
5. This is a copy of the original
document. It is not a
copy of the original document.

OK





☐ Program

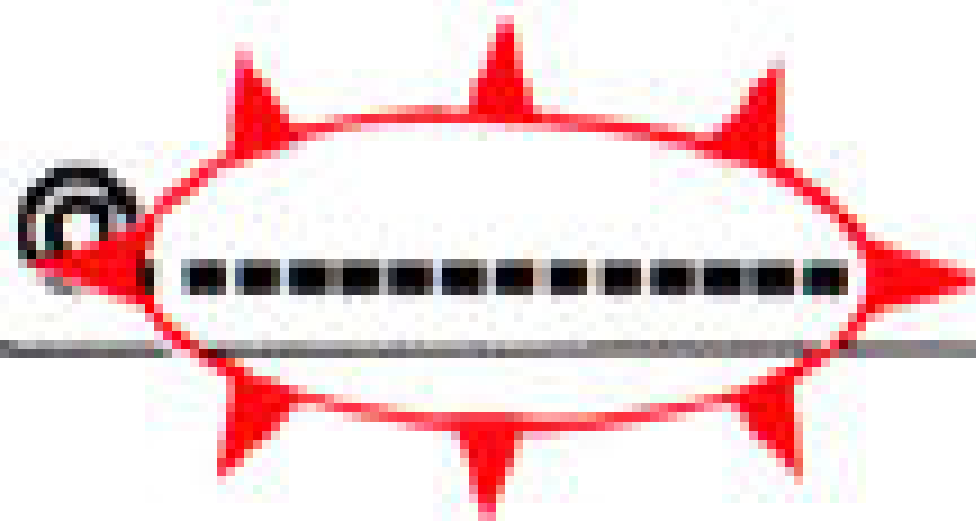

SINGLE

H


CONT.

L

2

10



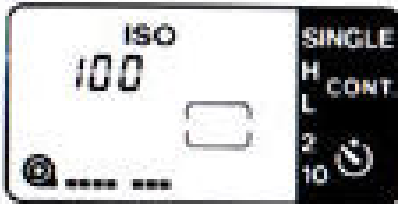

(Correct film transport display)







SINGLE



H

CONT.

L

2

10





SINGLE


H

CONT.

L

2

10





SINGLE


**H
L CONT.**

2

10



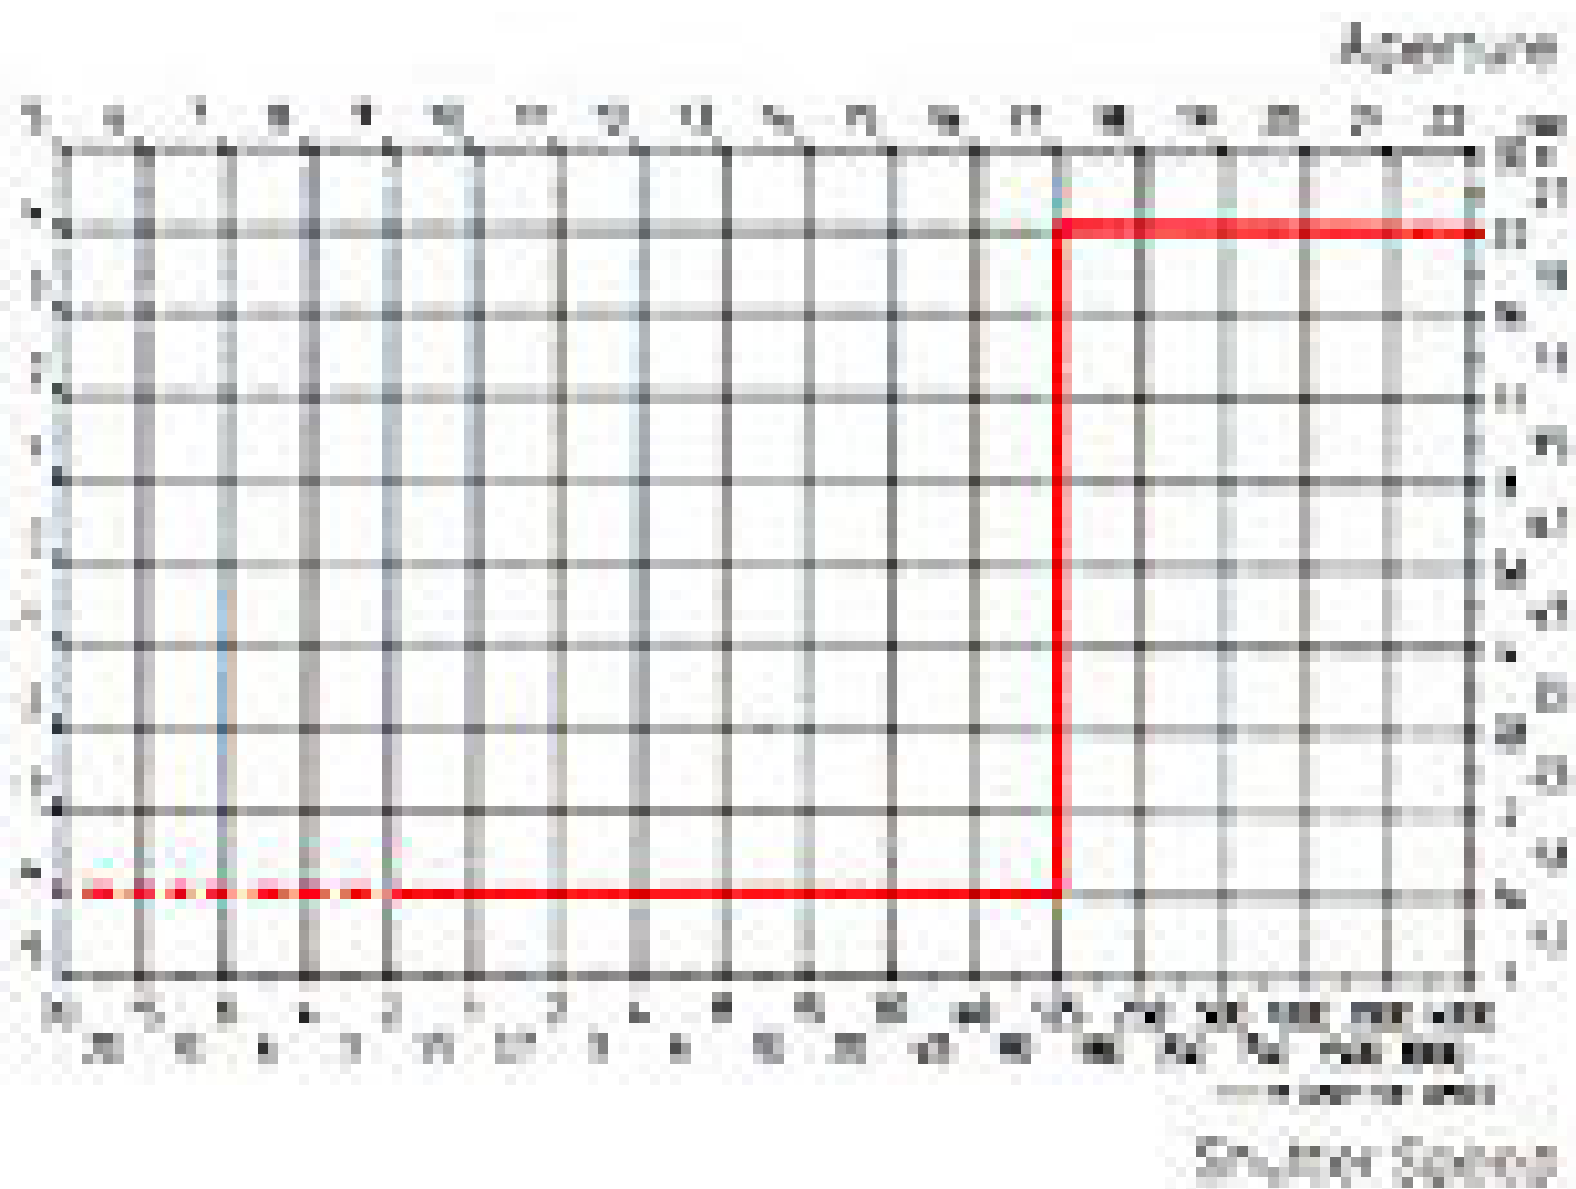

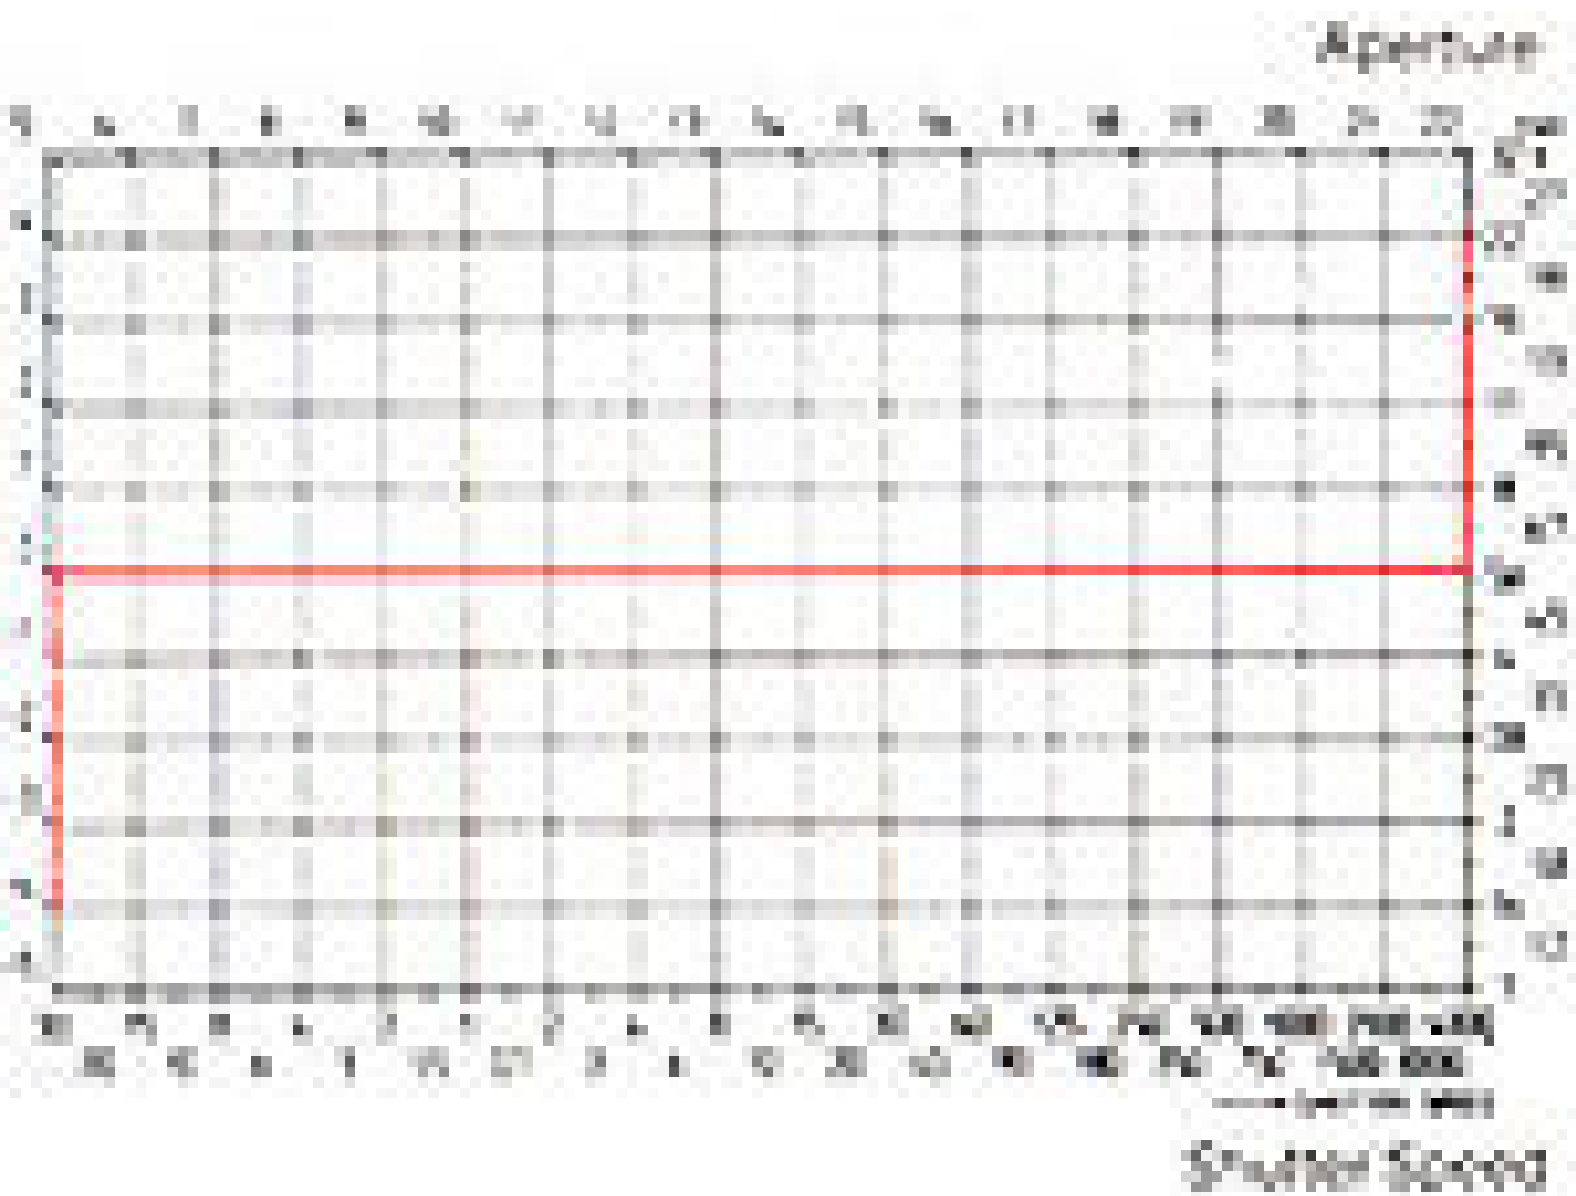














Shutter-priority AE display

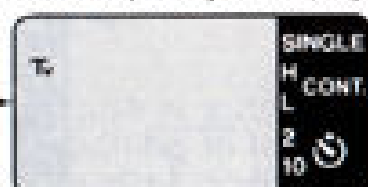


Aperture-priority AE display

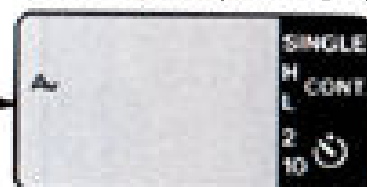

Standard program AE display

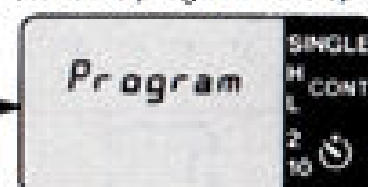

Bulb display

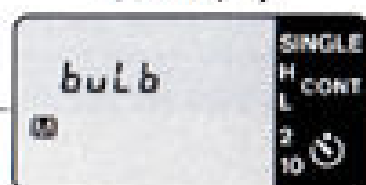


Variable-shift program AE display



Tv

125

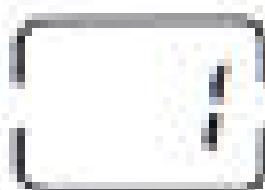

SINGLE

H

CONT.



L

2

10



A_v 5.6



SINGLE

H

CONT.

L

2

10





Program



.....



SINGLE

H


CONT.


L


2


10




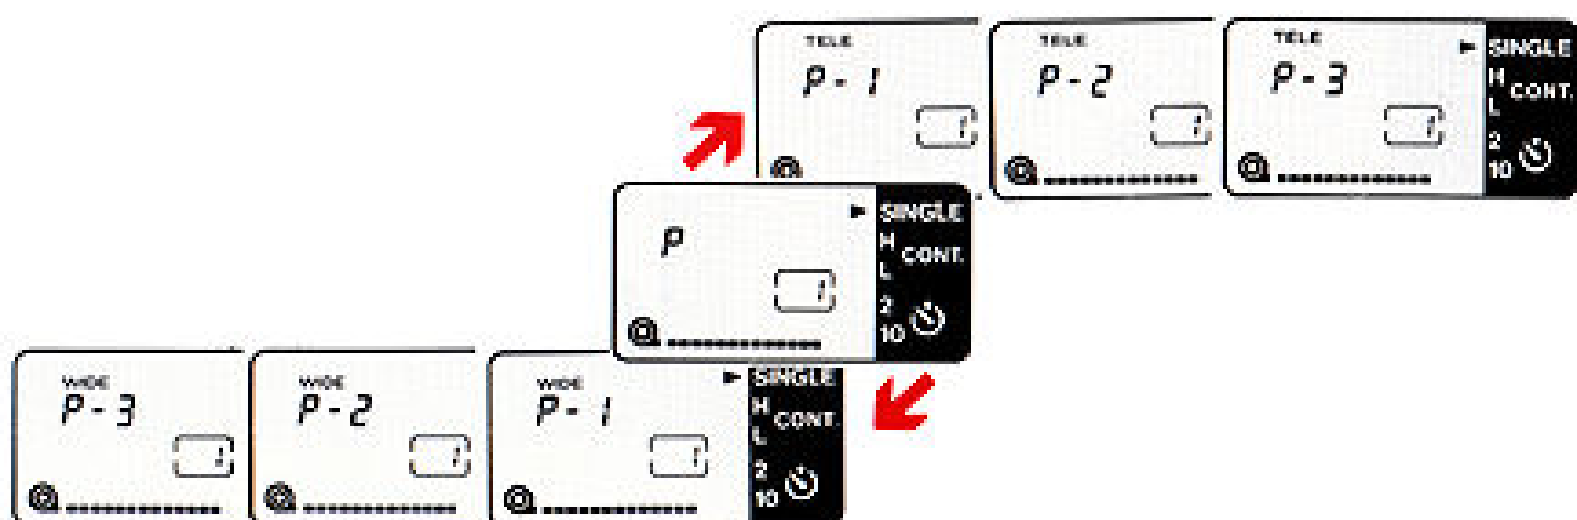


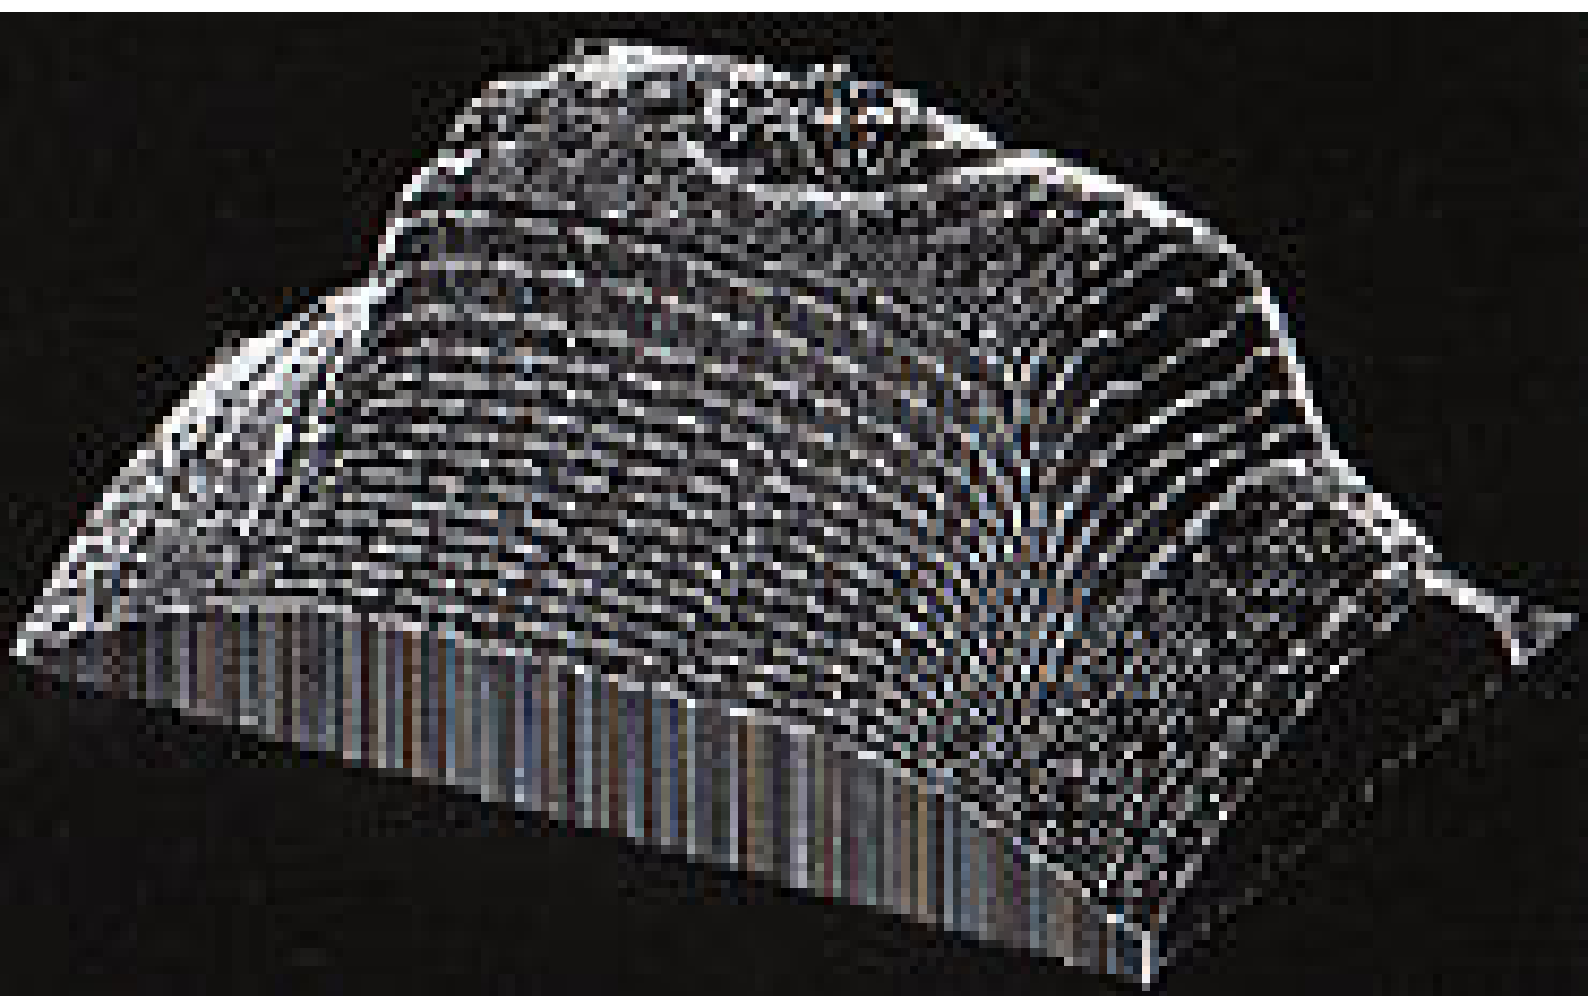

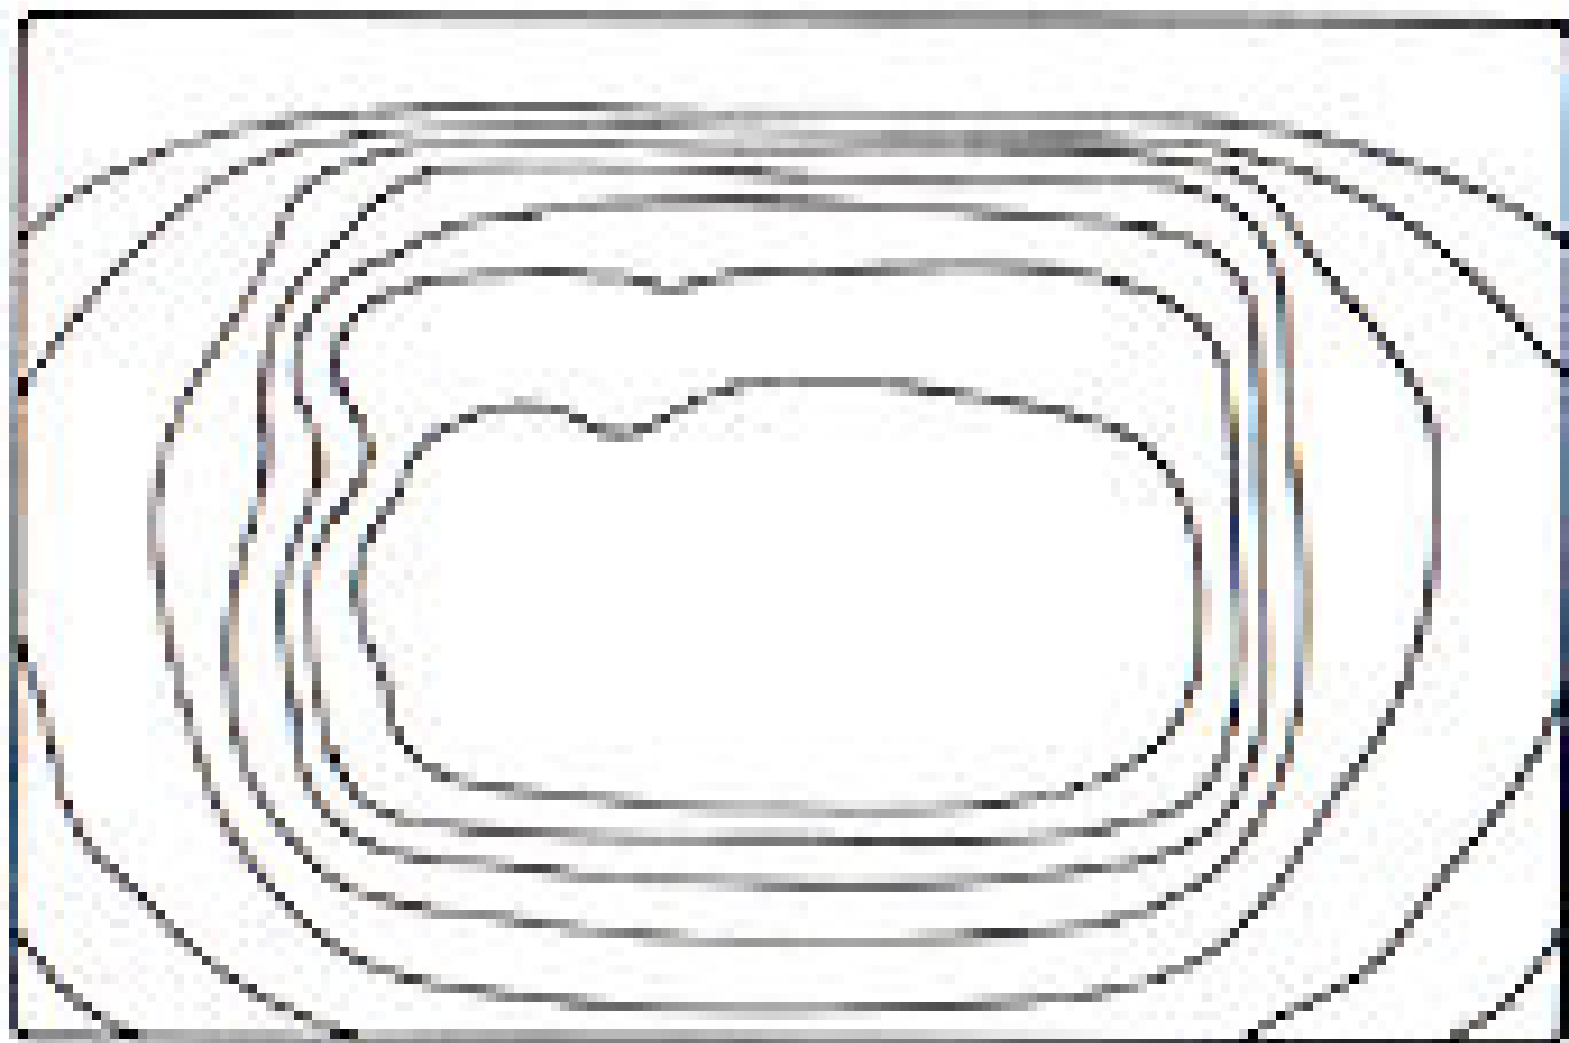

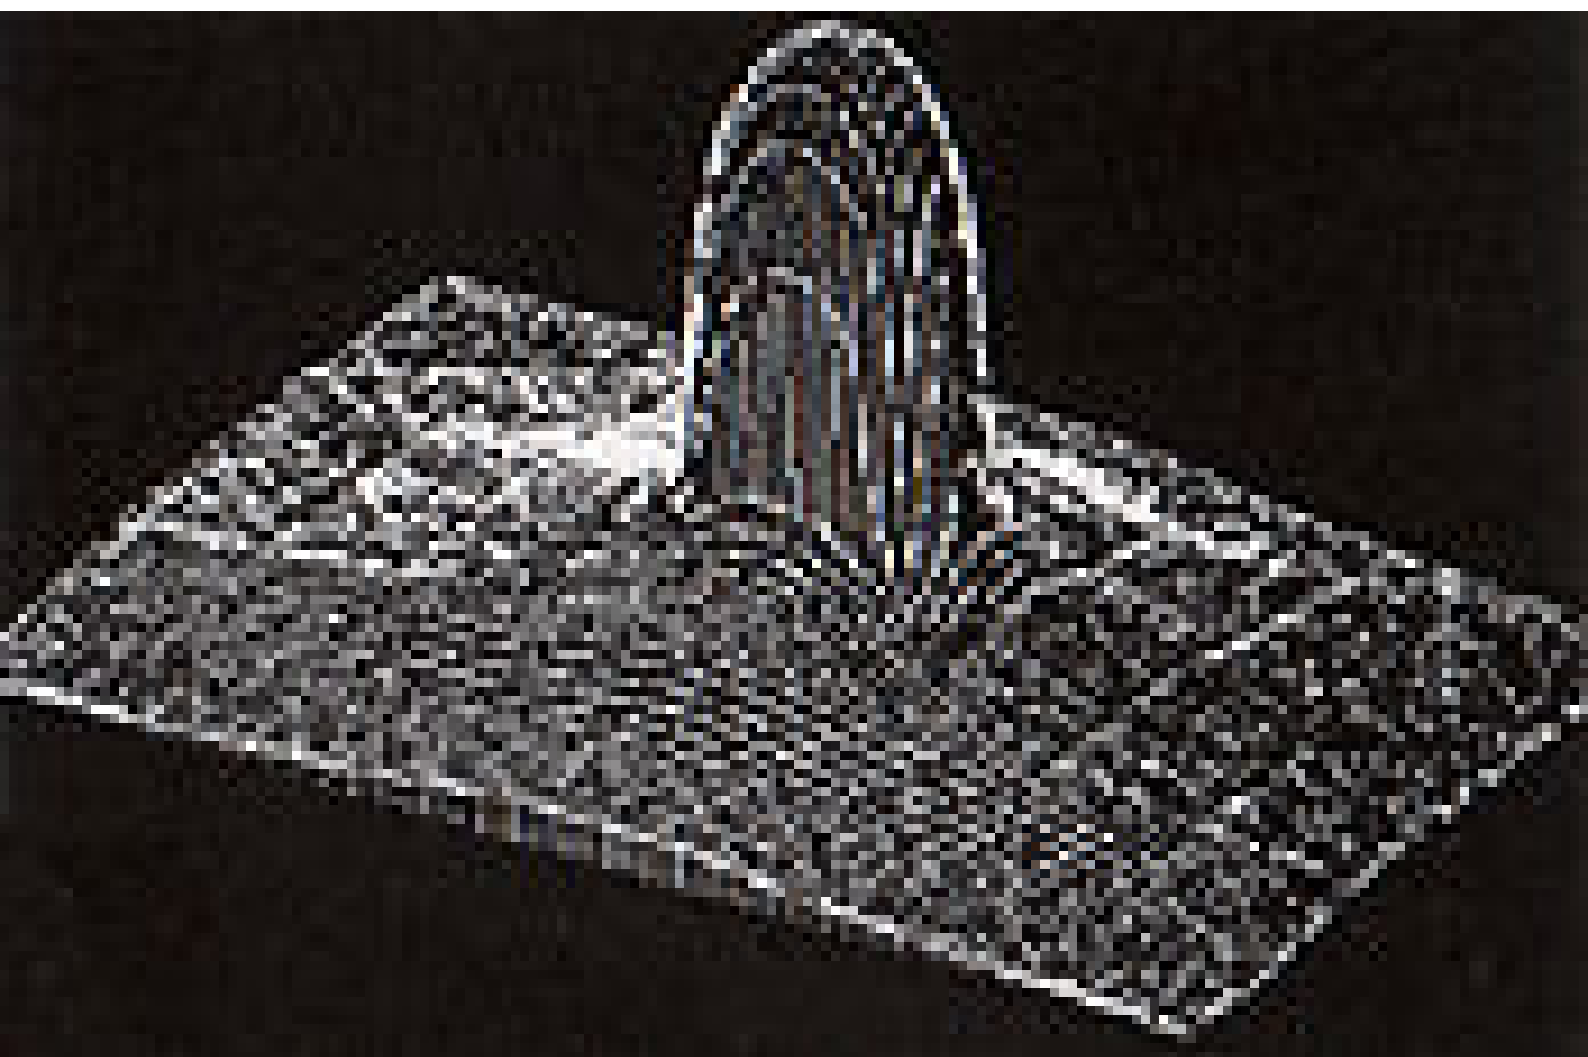

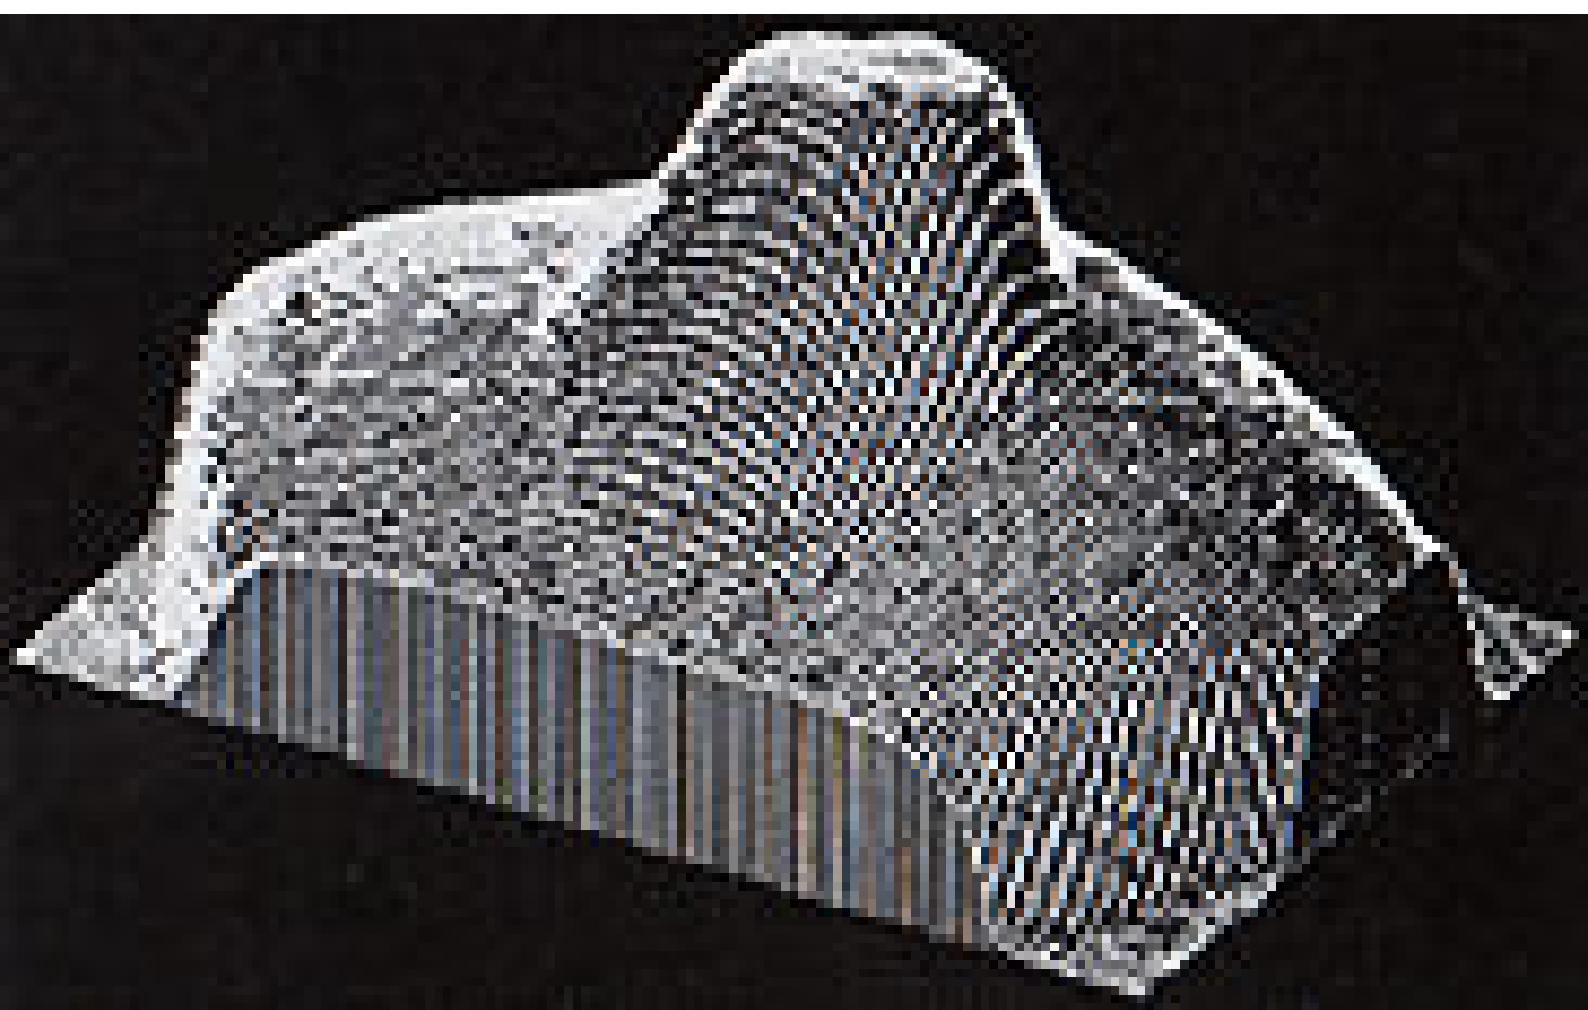


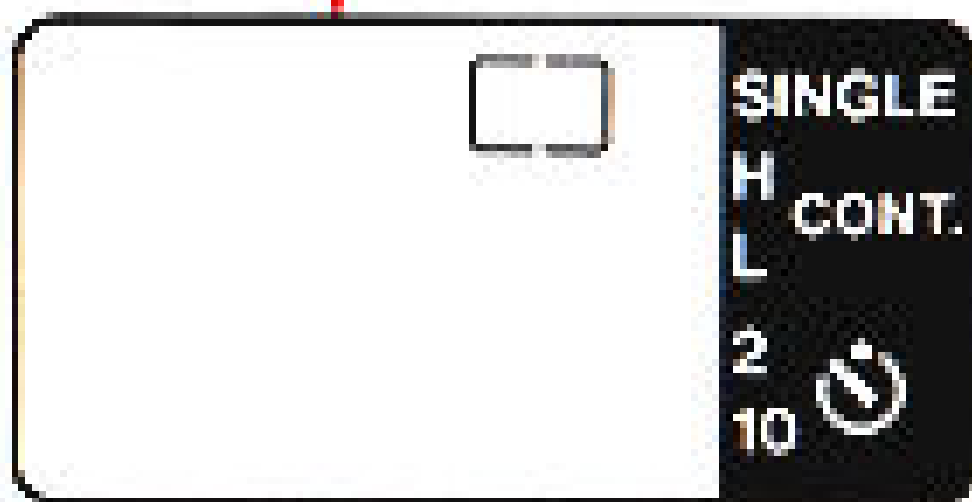


Center-weighted average
metering display



Partial metering display

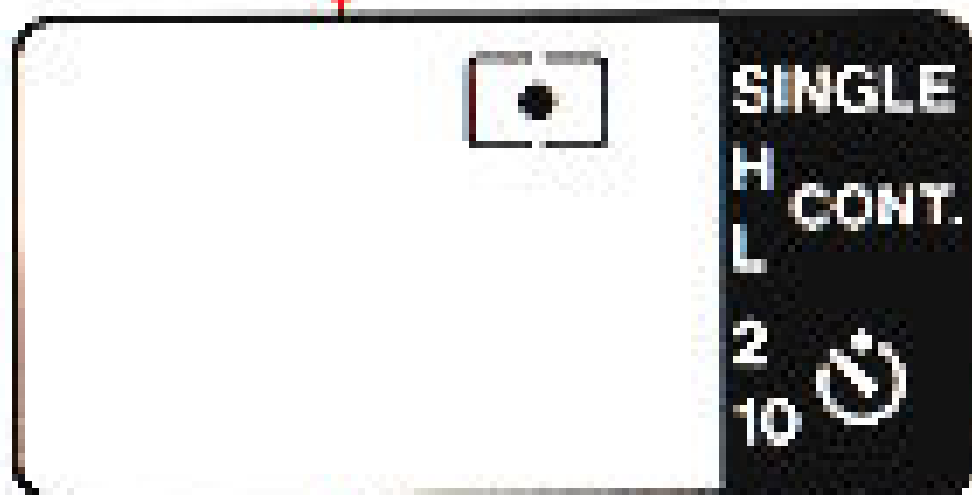

Spot metering display



Partial metering mark













Laser-matte screen

Microprism rangefinder

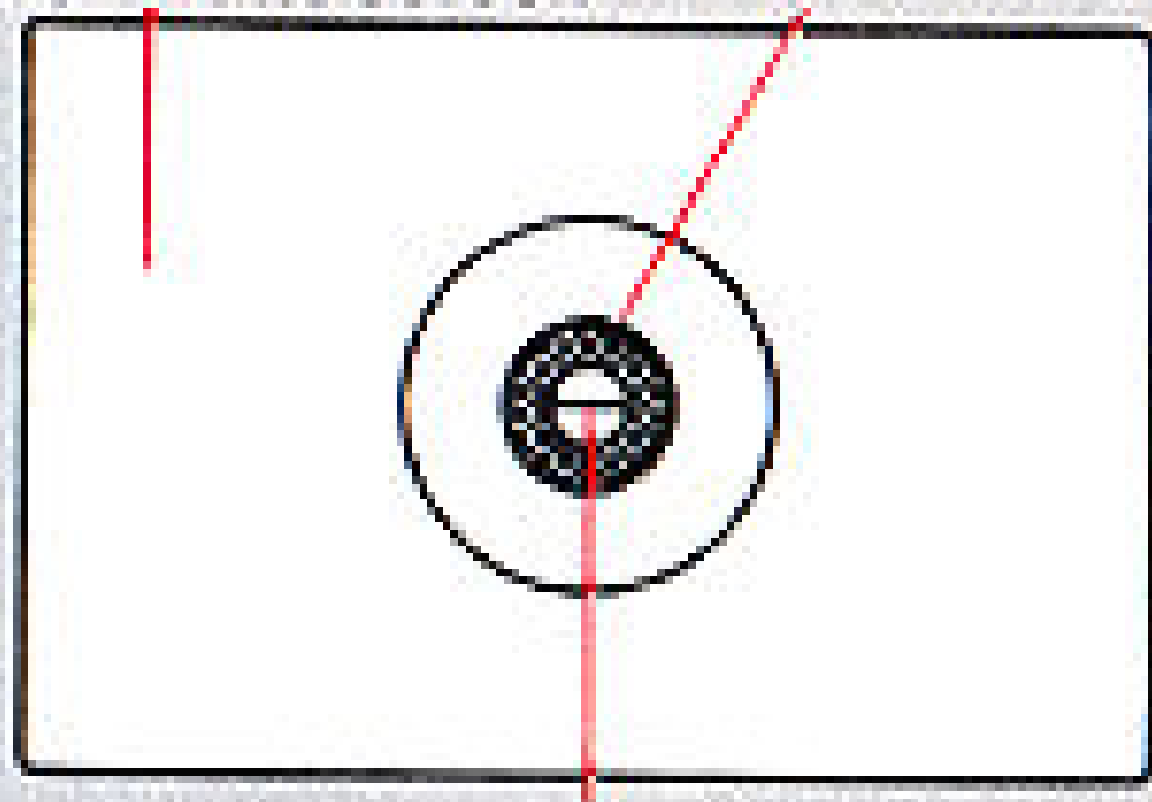

New split rangefinder



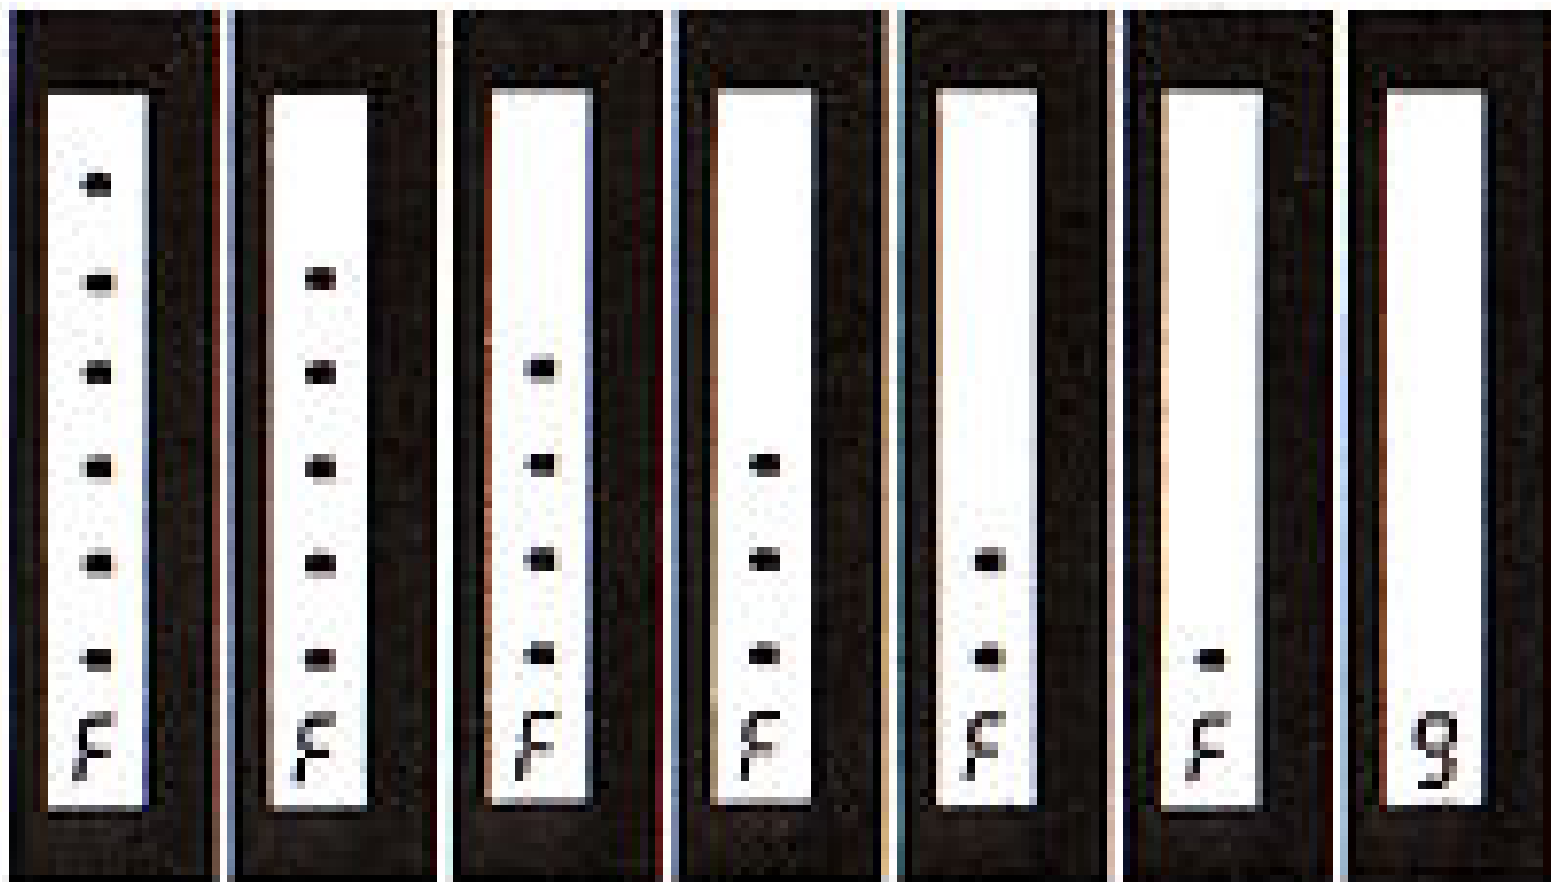

Incorrect exposure (blinking)

