


















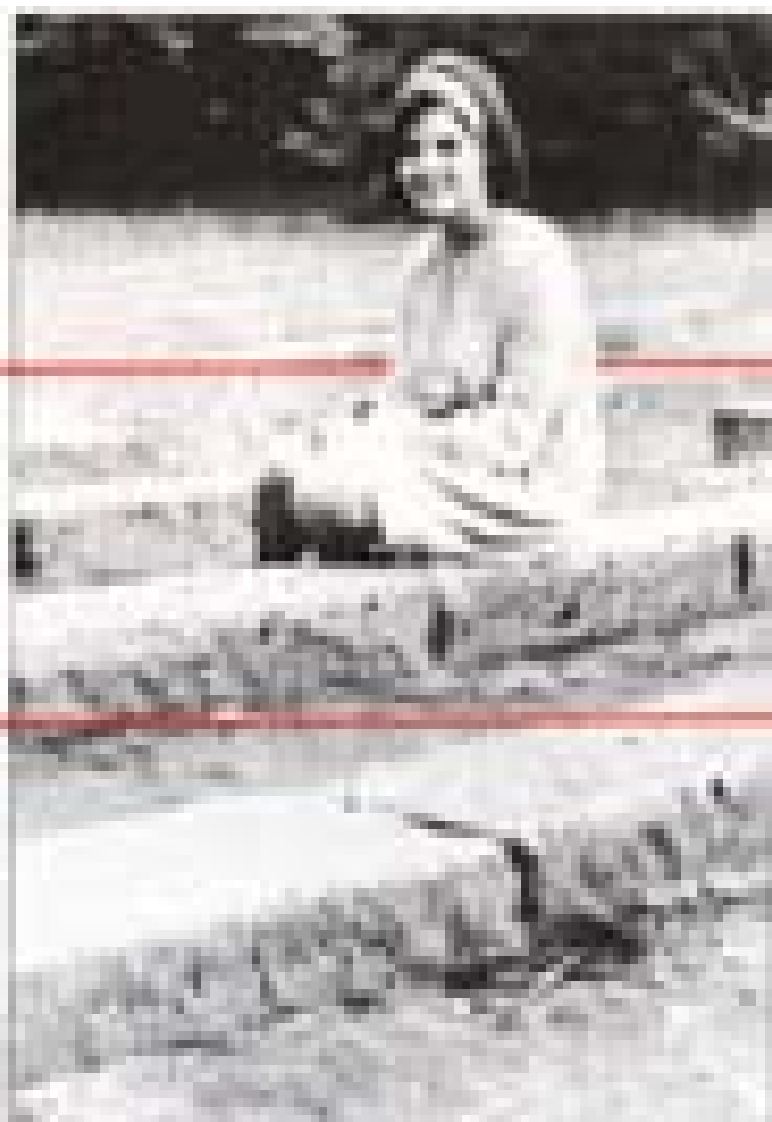

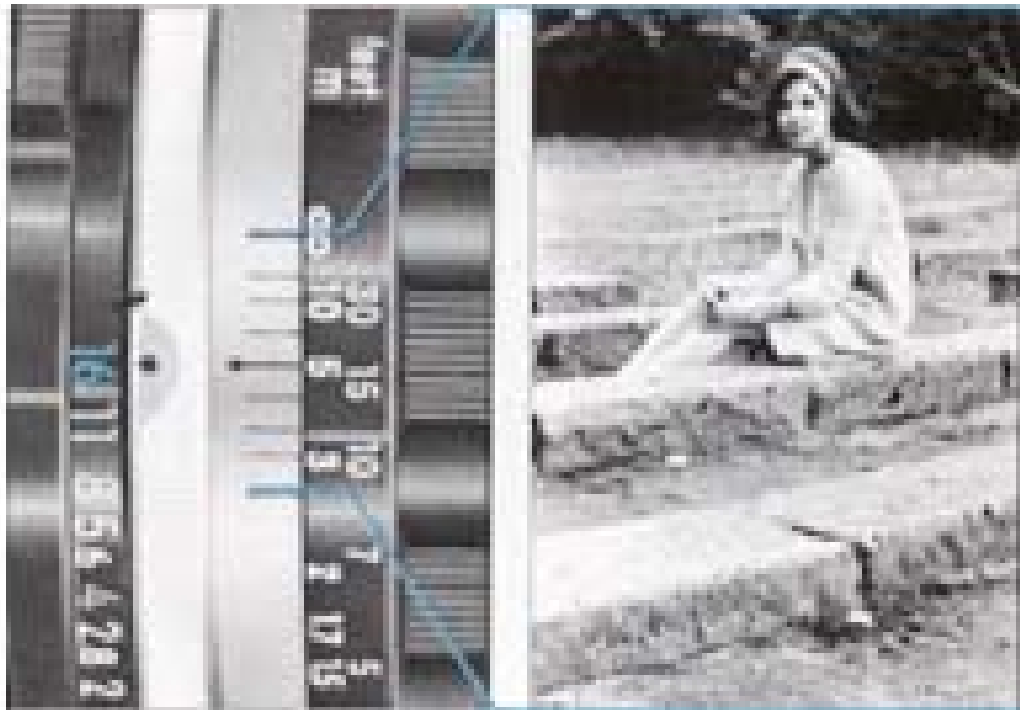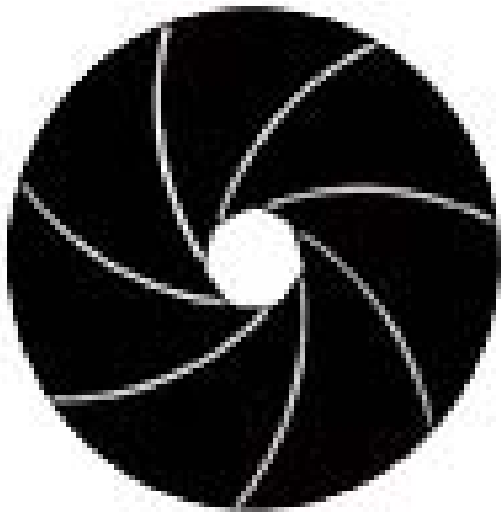

• **Nikommat** •











Action Finder



**Photomic FTn
Finder/Meter**



Waist-Level Finder



Eye-Level Finder




















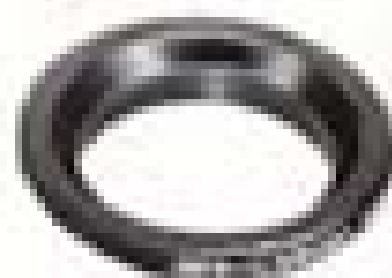










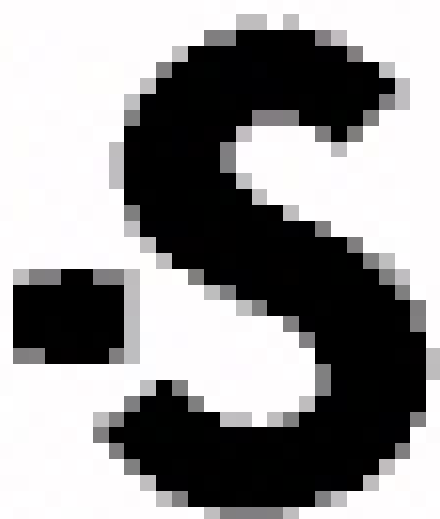

**METER
COUPLING RIDGE**

**METER
COUPLING
SHOE**

**LENS TYPE
SIGNAL
NOTCH**


**STOP
DOWN
LEVER**

**LENS
PROTECTORS**

**MAXIMUM
APERTURE
INDEXING
POST**

**LENS LOCK
INDENTATION**

**EE SERVO
COUPLING
POST**

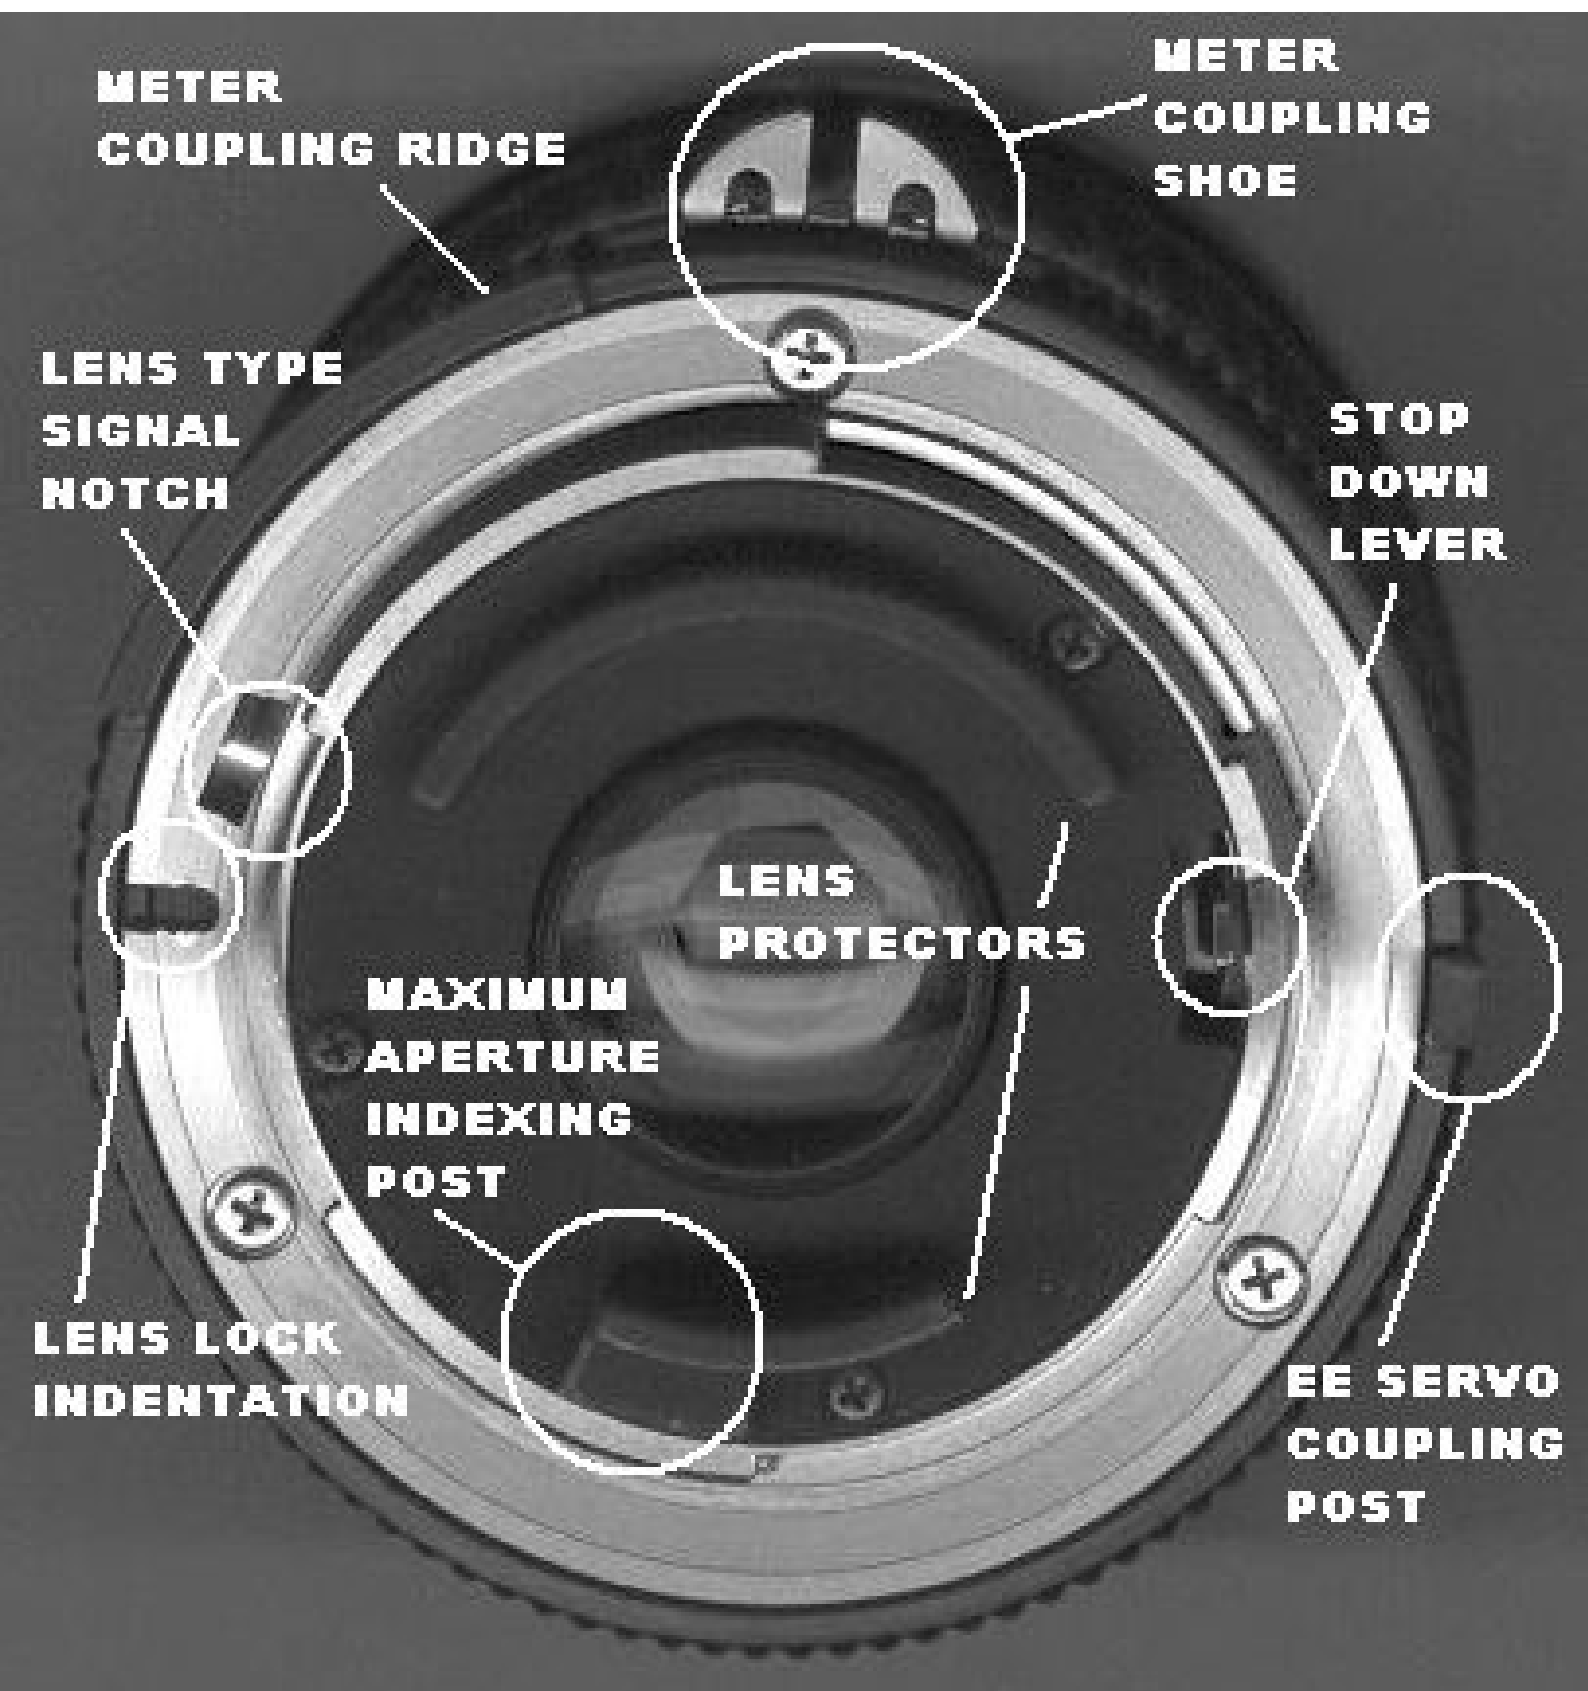






















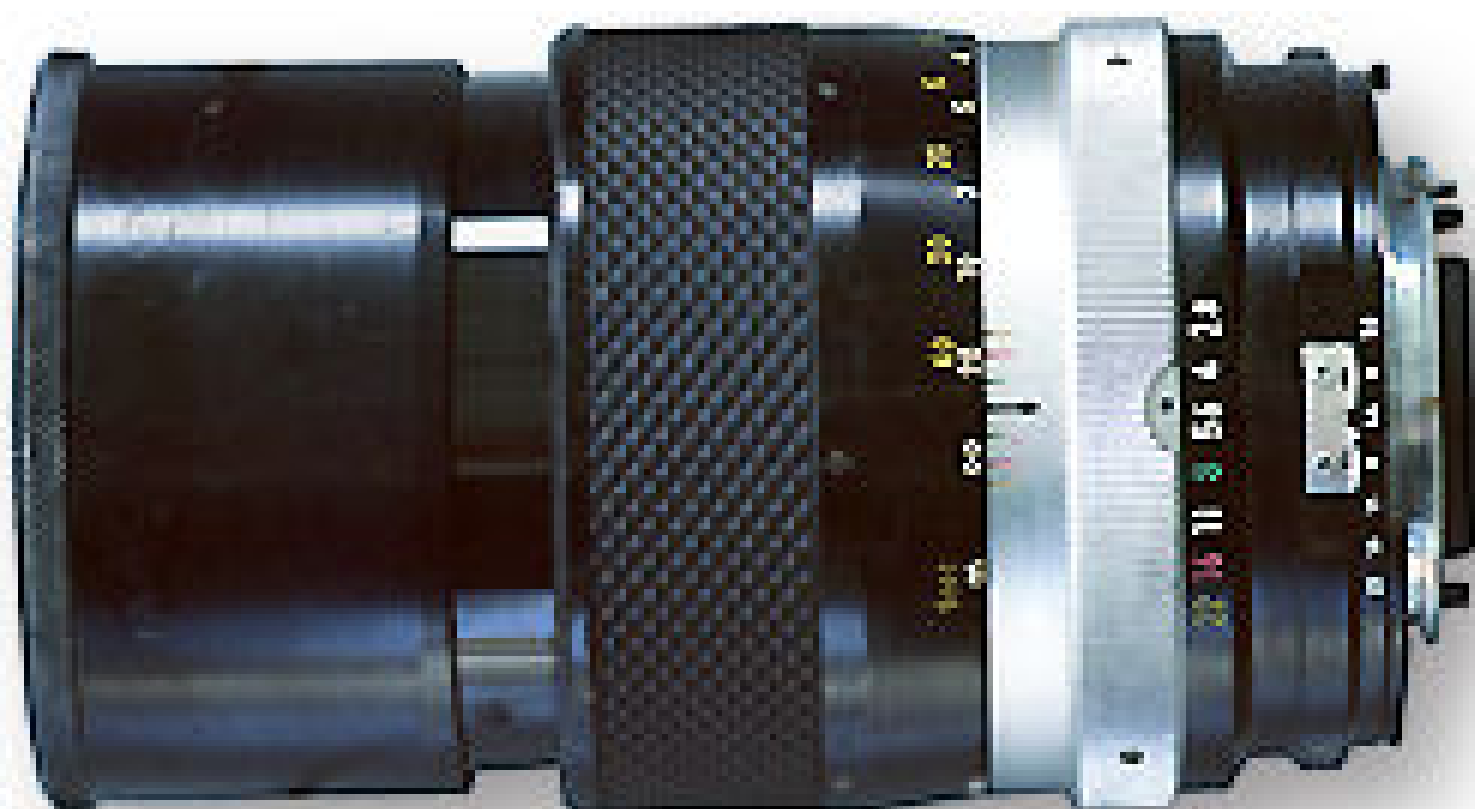











NIKKOR 135mm 1:2.3

11 70 35 18 9
m 1:2.3

16 11 8 5.6 4 2.8

10 5.6 4 2.8



(1)





(2)




(3)









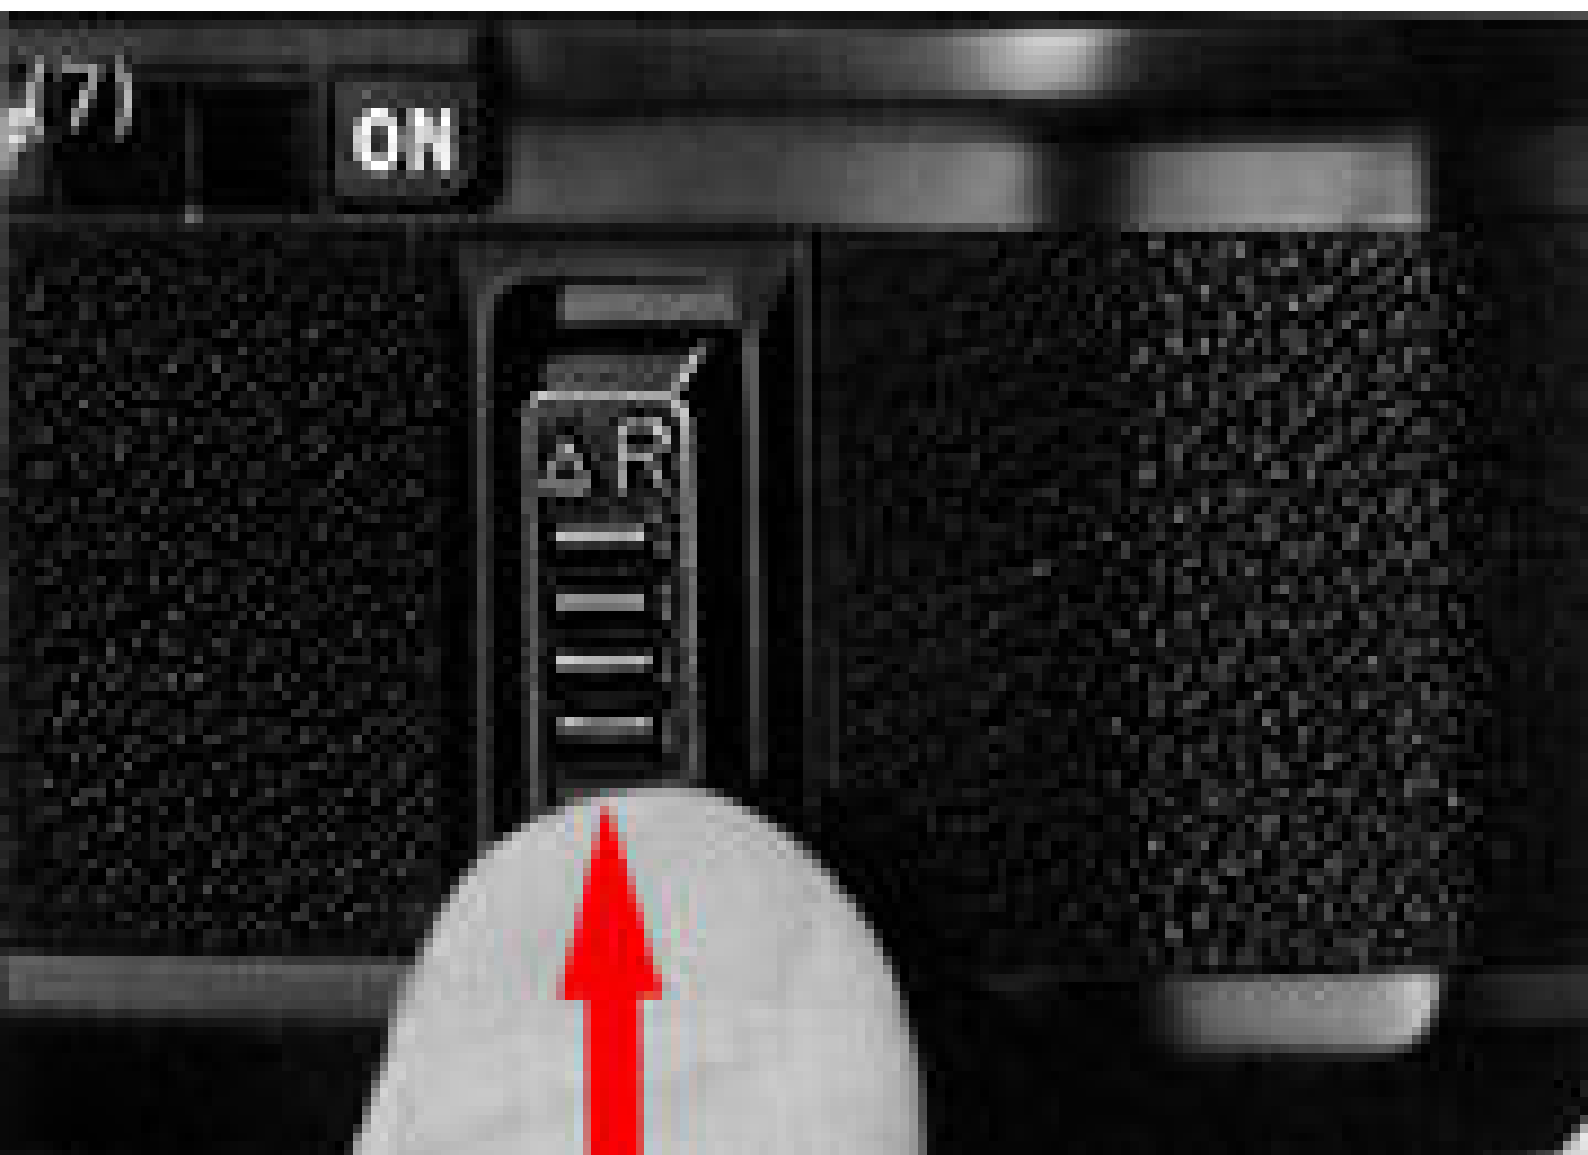

(8)
















Remote Control Bracket

Mounting Screw to camera

Mounting screw
Drive wheel



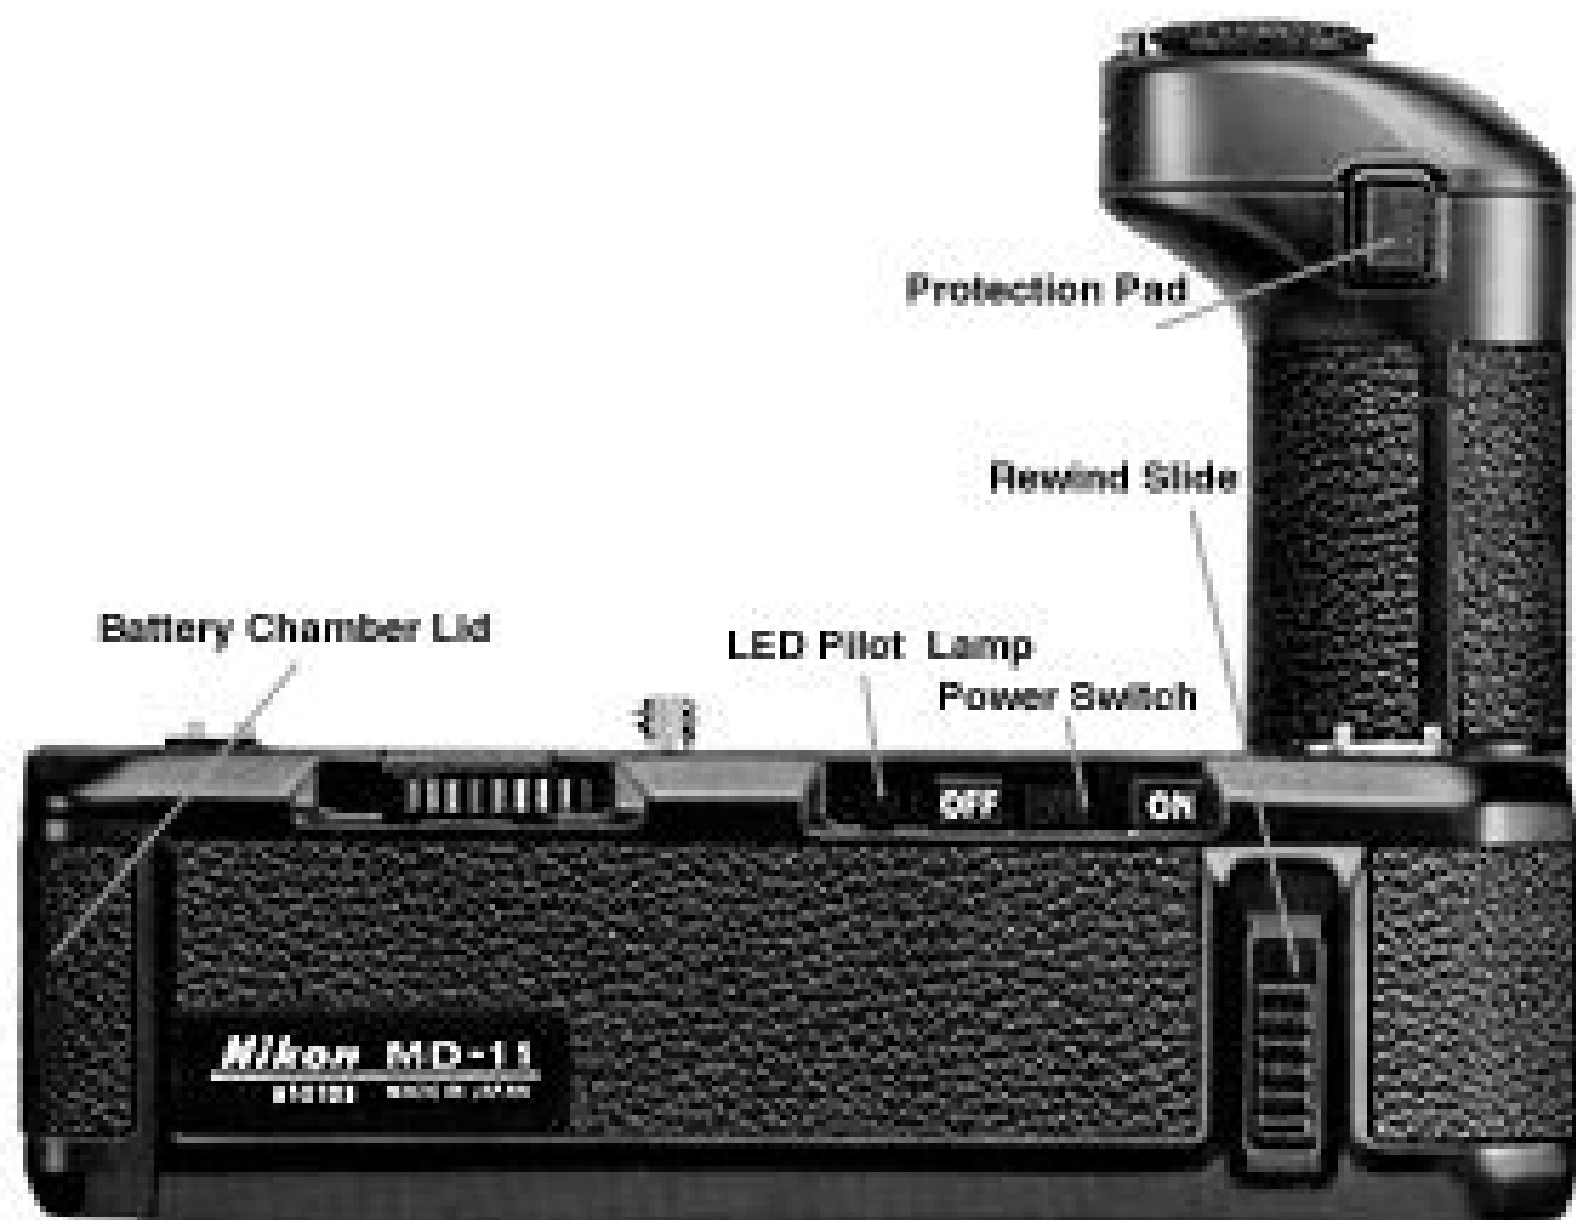







5.6



250



Nikon
























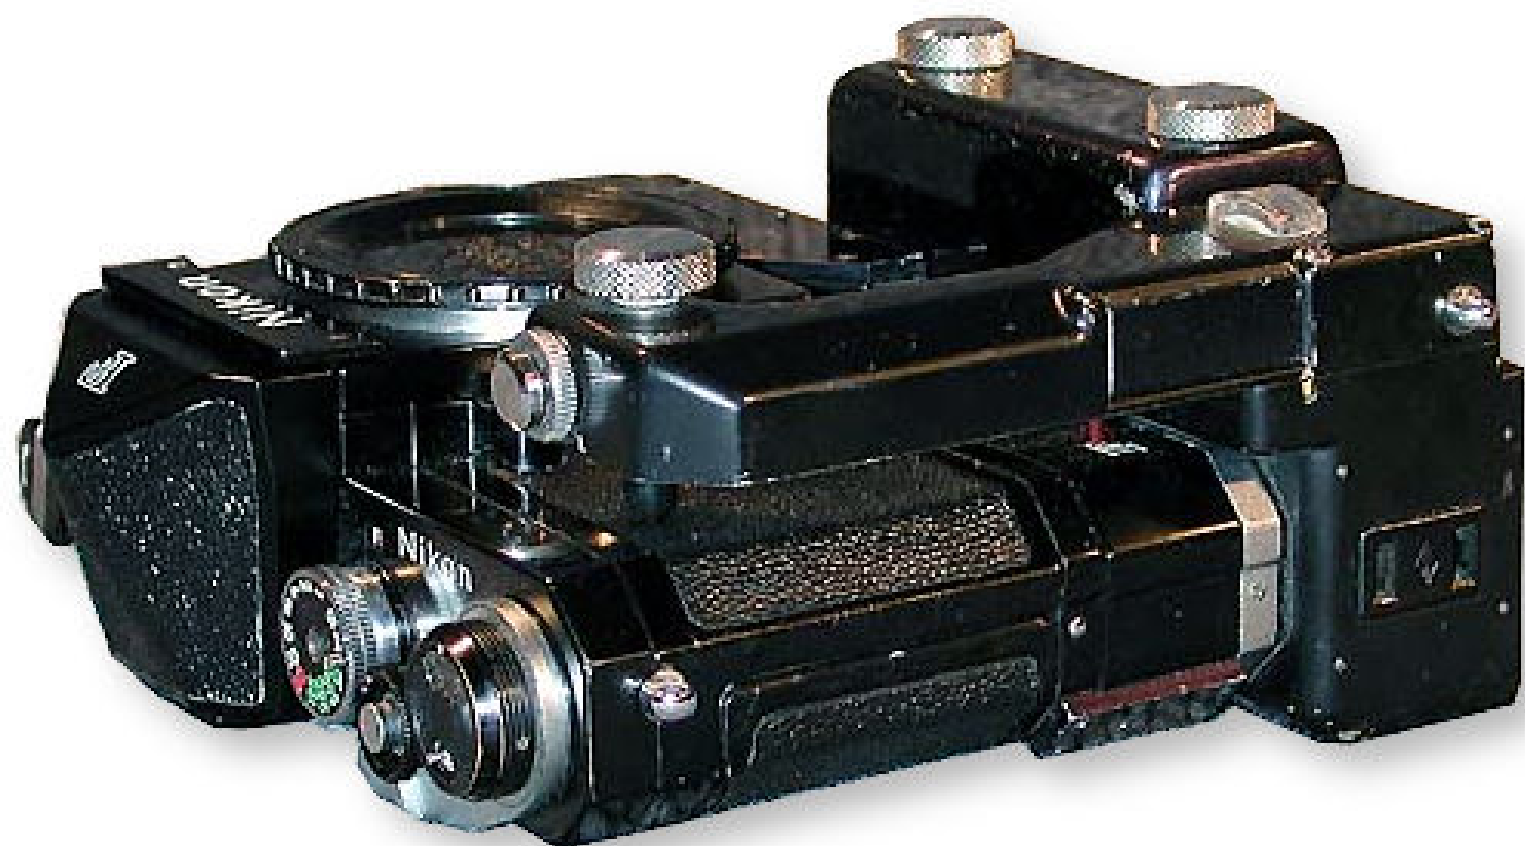



SHUTTER SPEED RANGE					115 VOLTS
Shooting Speed (Approx.)	Consecutive Exposures				Single Exposure
	L	M ₁	M ₂	H	
Frames / sec.	2	2.5	3	4	
Mirror Coupled	8-1000	60-1000	125-1000	Not Used	(B), 1-1000
Mirror Released	8-1000	30-1000	30-1000	125-1000	B, 1-1000


* (B): To be used at 9 volts

Nikon

JAPAN






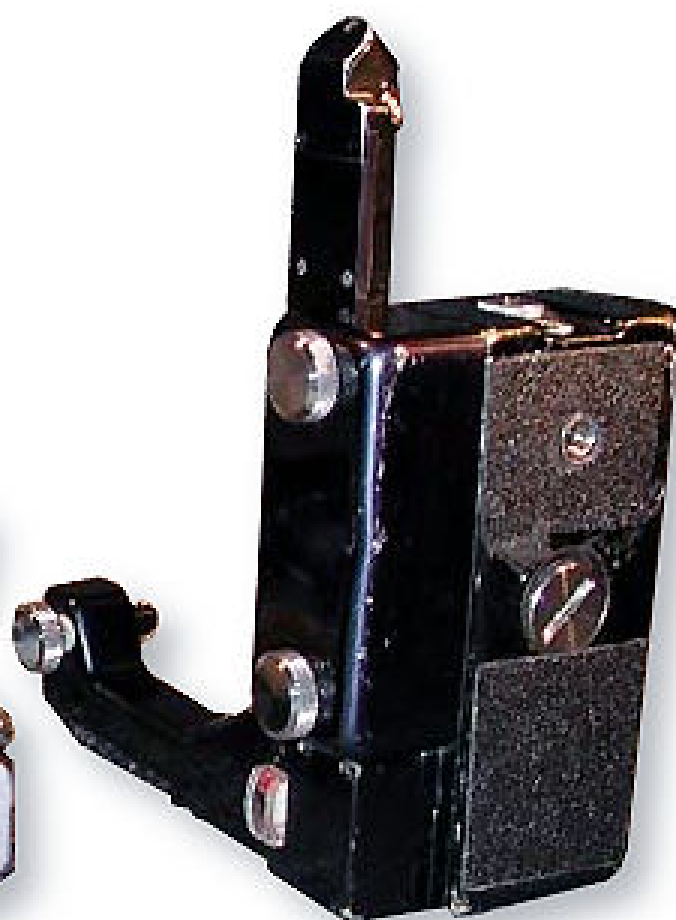






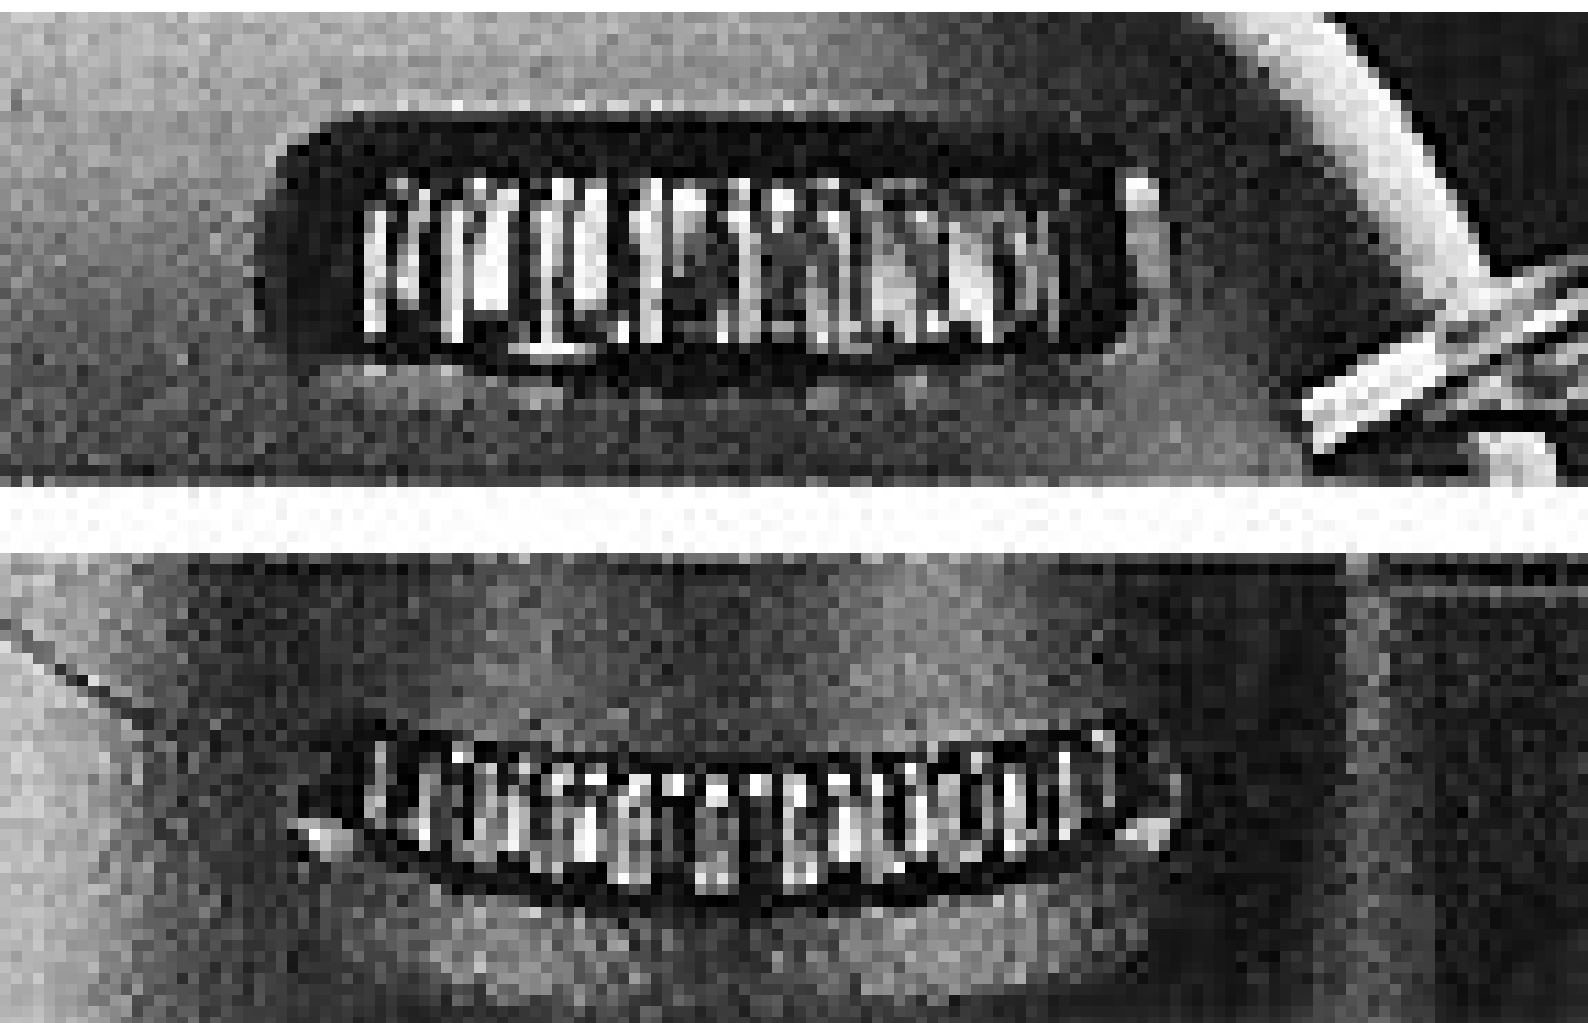












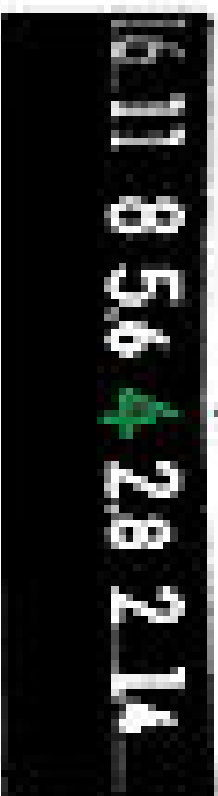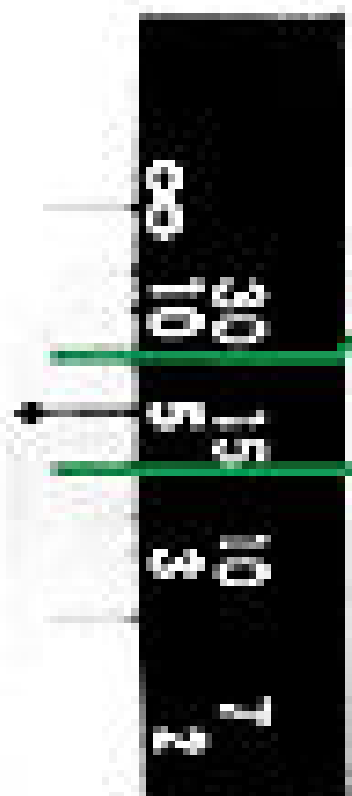





f5.6 + - 250

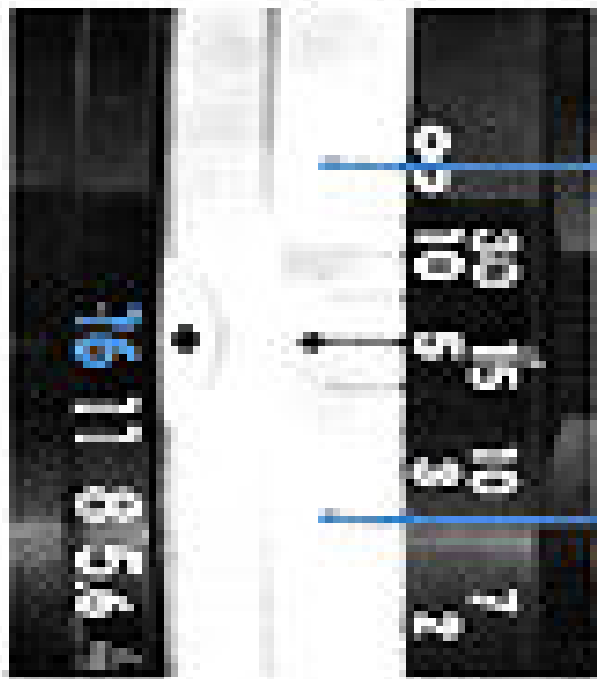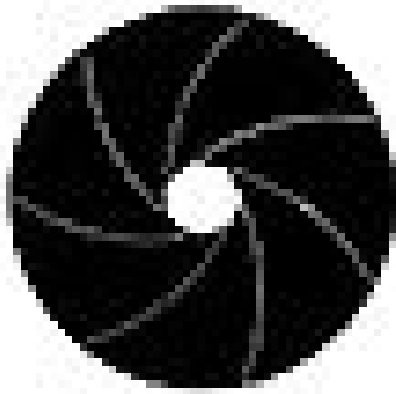

3. Lens at smallest aperture. Great depth of field with subject, background and foreground in focus.





