
# PENTAX® MZ-10

#### **OPERATING MANUAL**

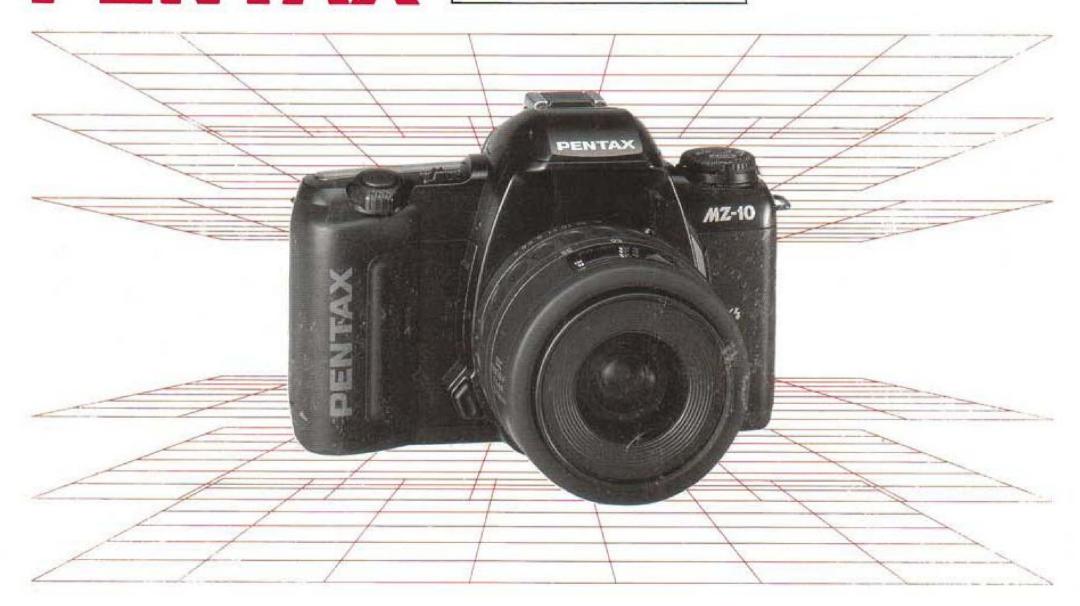

Congratulations on your purchase of this camera and welcome to the exciting world of Pentax autofocus photography! This compact and light weight camera is an autofocus SLR camera that offers higher levels of sophistication and performance. Incorporating a broad range of advanced technologies and highly accurate automation, this camera will perform superbly for the most exacting photographer.

The major features of this camera are:

- Multi (3-point) autofocus system
- Smart picture mode
- Automatic on off flash function with the built-in flash popped up

The camera explaining in this operating manual features the panorama function and data function.

Read this instruction manual carefully to get a full explanation of operations before use.




The names of the camera's working parts are listed on the front and back flaps in this operating manual. Keep the flaps unfolded for quick reference while reading this manual. Icon indicators used in this manual

Operation direction	<b>←</b>
Automatic operation	<b>****</b>
Attention	0
Lamp blinking	3,4
Correct	0
Incorrect	X

Lenses and accessories produced by other manufacturers are not made to our precise specifications and therefore may cause difficulties with, or actual damage to, your Pentax camera. We do not assume any responsibility or liability for difficulties resulting from the use of lenses and accessories made by other manufacturers.

## NAMES OF WORKING PARTS I

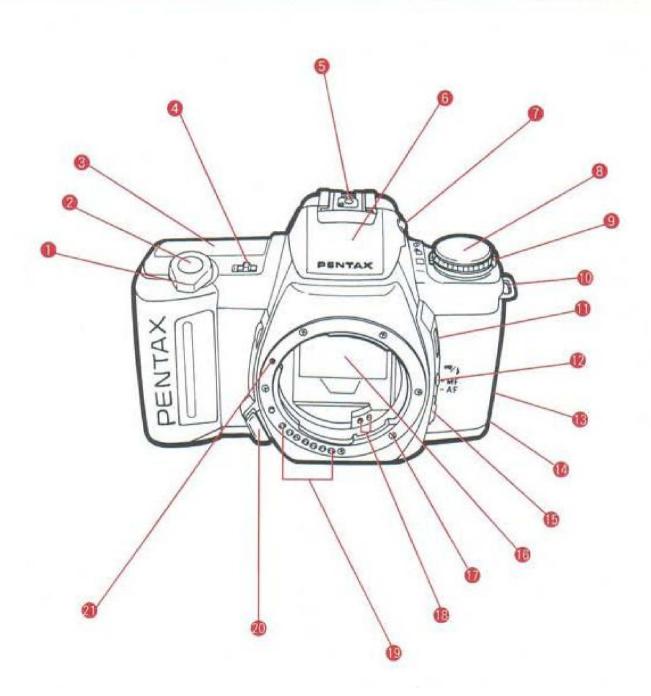

- Select switch
- Shutter release button
- @ LCD panel (p.6)
- Main switch (p.20)
- 6 Hot shoe (p.75)
- Built-in flash (p.37)
- Flash pop-up button (p.37)
- Mode dial
- Drive mode switch (p.44)
- Strap lug (p.13)
- Release socket (p.65)
- Multi-function button (p.40,42,67)
- Back cover release lever (p.22)
- Mid-roll rewind button (p.26)
- (b) Focus mode switch (p.34,46)
- **®** Mirror
- AF coupler
- Power supply contacts
- Lens information contacts
- Lens lock button (p.19)
- 4 Lens mount index (p.18)

## Your Pentax camera is a high-precision mechanism. Handle it with great care.

#### Precautions when taking pictures

- Do not use the camera where it may come in contact with rain, water, or any other liquid, because the camera is not weather, water, or liquid resistant. Should the camera get wet from rain, splashing water, or any other liquid wipe it off immediately with a dry soft cloth.
- Do not drop the camera or allow it to hit solid objects. If the camera suffers a shock or impact, take
  it to a Pentax service center for inspection.
- Be careful not to subject the camera to strong vibrations, shock or pressure. Use a cushion to protect the camera when carrying it in a motorcycle, car, boat, etc.
- Condensation on the interior or exterior of the camera may be extremely harmful to the camera mechanism as it may cause rust. Furthermore, if the camera is taken from warm temperature to a subfreezing one or vice versa, the formation of icelets may cause damage. In such a case, put the camera into a case or plastic bag so that any changes in temperature difference is minimized. Do not remove it from the bag until temperature has stabilized.
- Regular size color prints may cut off what appears on the extreme edges of the film frame. Compose your picture with a margin of safety at the edges.

#### Precautions for storage

- Avoid leaving the camera for extended periods in places where the humidity and temperature are very high, such as in a car.
- Do not store the camera in a closet with mothballs or in an area where chemicals are handled. Store it in a place with good dry air circulation to prevent the growth of fungus.

#### Precautions for proper care

- Never touch the shutter curtain or mirror with your finger or any other object.
- Use a blower and lens brush to remove dust accumulated on the lens or viewfinder.
- Never use solvents such as paint thinner, alcohol or benzene to clean the camera.
- Electrical problems may often be caused by water, dirt or dust at points of electrical contact. Also check for battery leakage, traces of dirt or grease, or corrosion due to salinity or gas. If you cannot correct the problems, have your camera inspected at a Pentax service center. Repairs of this nature are not covered under the terms of the warranty and charges may be assessed.

## PRECAUTIONS FOR BATTERY

#### Other precautions

- The temperature range at which this camera functions properly is 50°C to -10°C (122°F to 14°F).
- A camera which has been submerged in water usually cannot be repaired. If such an accident should occur, it is advisable to contact a Pentax Service Center immediately.
- To maintain optimum performance, it is recommended that the camera be inspected every one or two years. If the camera has not been used for an extended period, or is being prepared for an important photographic session, it is recommended that you have the camera inspected or test shoot with it.
- Repairs deemed necessary due to usage of this product in an industrial or commercial application may not be covered under the terms of the Pentax warranty.
- The PENTAX warranty provides only for the repair of defects in materials or workmanship. Damage of any kind cannot be repaired at no charge under the terms of the warranty. If the difficulty is caused as a direct result of the product being used in conditions as outlined in the "Precautions for Your Camera" section or any other operation contrary to the instructions outlined in this manual, charges will be assessed and a repair quotation will be provided.

Use two 3V lithium batteries (CR2 type).

 Misuse of the battery can cause hazards such as leakage, overheating, explosion, etc. The battery should be inserted with the "+" and "-" sides facing correctly.

 Battery performance may be temporarily hindered in low temperatures, but will recover in normal

temperatures.

 Keep a spare battery on hand for replacement convenience when shooting outdoors or while traveling.

- If the built-in flash is used continuously, the battery may become warm, but it does not mean that the battery is faulty; it is one of the battery's characteristics.
- Replace the batteries at the same time. Do not mix battery brands, type or an old battery with a new one. It may cause explosion or overheating.

## PRACTICAL SHOOTING GUIDE



#### Focusing

Changing the in-focus range. .....p.58



#### Flash photography

Taking a picture in low light situationsp.37
Minimized the red-eye effectp.40
Automatic Flash Functionsp.42
Taking a picture in a roomy place such as a church or reception hallp.75
Taking a portrait when the subject is in the shade. p.79
Taking a picture of people with night scenery in the backgroundp.80



#### Zooming the lens

Making a subject larger or smaller. .....p.30



#### Exposure modes



#### Taking pictures of people in various situations

Putting yourself into a picture. .....p.44
Taking a group photograph. ....p.54
Taking a portrait photograph. ....p.54
Taking a picture in strong backlit situations with the main subject in the shade. ....p.79
Taking a picture of people with night scenery in the background. .....p.80



#### Landscape photography

Taking a picture of night scenery. .....p.64
Taking a picture of people with night scenery. .....p.80



#### Others


Imprinting the data on a picturep.21
Taking consecutive pictures of a moving subject. p.44
Taking a horizontally dynamic panorama picturep.50
Taking a picture of a moving subjectp.36,57
Taking a close-up picturep.56

## TABLE OF CONTENTS

Names of working parts·····Flaps	Attaching the lens18
Safe use of your cameraInside cover	Operating the shutter release button20
Precautions for your camera ······1	Turning on the power ······20
Precautions for battery2	Using the Data Back21
Practical shooting guide3	Film loading ·······22
Table of contents4	Unloading film ······25
LCD panel indication ·····6	Rewinding a film in mid-roll
Viewfinder indication ·····7	
<ul> <li>Multi (6) - segment metering ······7</li> </ul>	II BASIC OPERATION (SHOOTING)27-42
Easy to use! (For beginners)8	Using the Smart Picture Mode27
Camera and lens mount ······10	Setting the Single-Frame Drive Mode29
Camera functions available with various lenses	Using zoom lenses ······30
11	Holding the Camera33
How to use this operating manual12	Selecting the Autofocus Mode32
	Taking a picture35
I. BASIC OPERATION (PREPARATION) ··· 13-26	Basic operation of the Built-in Retractable TTL
Attaching the camera strap13	Flash (RTF)37
Loading the batteries14	Red-eye Reduction Flash Function40
When the battery is exhausted17	Automatic flash function42

III ADVANCED OPERATION ······43-87	<ul> <li>Compatibility of F and FA lenses with the</li> </ul>
Selecting a Drive Mode43	built-in flash ······70
Consecutive Frame Mode	Setting the film speed (ISO) manually71
Self-Timer Mode44	Installing the battery in the Data Back72
Manual focusing ······46	Adjusting the data on the Data Back73
<ul> <li>Using the snap-in focus function ······48</li> </ul>	Using a Pentax Dedicated External Flash75
Taking a panorama format picture50	<ul> <li>Contrast-Control-Sync Flash Photography 77</li> </ul>
Using the Picture Mode52	Daylight-sync shooting79
Green Operation Mode53	Slow-speed-sync shooting ······80
Portrait Program Mode	
<ul> <li>Landscape Program Mode ······55</li> </ul>	ACCESSORIES (OPTIONAL)81
Close-up Program Mode · · · · · 56	Camera case83
<ul> <li>Action Program Mode ······57</li> </ul>	Effects of aperture and shutter speed84
Selecting an Exposure Mode · · · · · 58	Depth of field86
<ul> <li>Using the Aperture-Priority AE Mode ·····58</li> </ul>	The infrared index·····87
<ul> <li>Using the Shutter-Priority AE Mode ······60</li> </ul>	
<ul> <li>Using the Metered Manual Mode ·····62</li> </ul>	IV. OTHERS88-96
Bulb Exposure Mode	Troubleshooting88
About Exposure Compensation 66	Specifications90
Turning off the audible PCV signal67	Program lines ······92
Advanced operation for the Built-in Retractable	Warranty policy94
Flash (RTF)68	

## LCD PANEL INDICATION

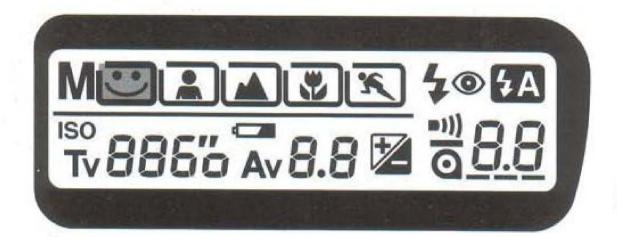

All indications will not actually appear simultaneously as shown.

M : Metered Manual Mode (p.62)

: Green Operation Mode(p.53)

: Portrait Program Mode (p.54)

: Landscape Program Mode (p.55)

: Close-up Program Mode (p.56)

: Action Program Mode (p.57)

💲 : Flash information (p.37,39)

Red-eye reduction flash indication (p.40)

Automatic flash function information (p.42)

ISO : Manual-set film speed (p.71)

Tv 8850 : Shutter speed

: Battery exhaustion warning (p.17)

Av 8.8 : Aperture value

Exposure compensation (p.66)

: Audible PCV signal (p.67)


Q\_\_\_ : Film status information (p.24,25)

8.8 : Exposure counter (p.24) and Exposure compensation value (p.66)

LCD (Liquid-Crystal Display)

When the LCD is exposed to high temperatures over approximately 60°C, it may blacken, but when the temperature normalizes, it should return to normal.

## VIEWFINDER INDICATION



: 3-point AF frame (p.35)

K

: Shutter speed : Aperture value

: Aperture value

: Green Operation Mode (p.53),

: Portrait Operation Mode (p.54)

: Landscape Program Mode (p.55)

: Close-up Program Mode (p.56)

: Action Program Mode (p.57)

: Flash status information (p.37,39)


: In-Focus indicator (p.35)

: Exposure compensation (p.66)

: Bar graph (p.62,66)

#### **MULTI (6)-SEGMENT METERING**


This camera incorporates high-precision six-segment TTL metering system. Light values are measured in six segments within the image field, enabling an optional exposure to be made under a variety of lighting conditions. With conventional averaged metering systems, underexposure of the subject results from the brightness of the background affecting the overall metering. With multi(6)-segment metering, the camera records the brightness in six zones within the image field and will properly expose the subject. The multi (6)-segment metering system also calculates exposure values for a scene to automatically compensate for high-contrast and other difficult lighting conditions. Even a beginner can achieve results with ease.

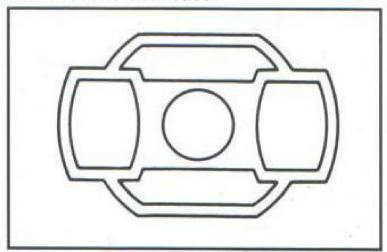

 When the format is switched to panorama, the viewfinder switches to the horizontal panorama format frame. For details on panorama format picture taking, see page 50.


## **EASY TO USE (For beginners)**

#### 1. Loading the batteries

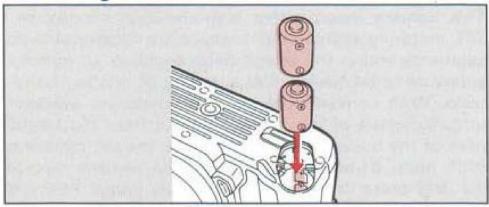


Open the battery chamber cover by using a coin. Load two batteries (CR2 type) according to the markings (+,-) on the battery chamber cover. (See page 14.)

#### 2. Attaching the lens

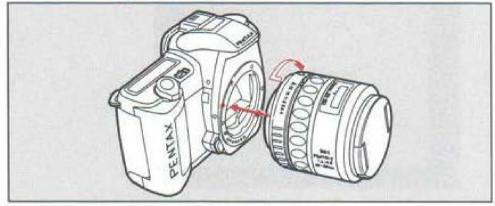


Align the red indexes on the lens and camera. Turn the lens to the right until it seats with a click. (See page 18.)

#### 3. Positioning the aperture ring




While holding down the aperture-A-lock button, turn the lens aperture ring to the [A] position. (See page 27.)

#### 4. Setting the mode dial




Set the mode dial to [PICT]. (See page 28.). The Smart Picture Mode will be set.

#### 5. Turning on the power



Slide the main switch to [ ON ]. (See page 20.)

#### 6. Loading film

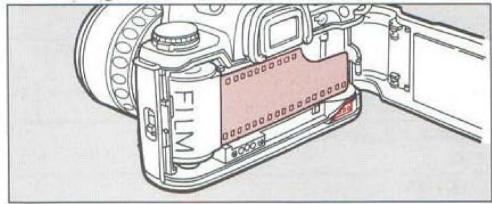


Open the back cover, insert a roll of film, align the end of the film leader with the red mark, and close the back cover. The film should advance to the first frame automatically. (See page 22.)

#### 8. Composing the scene with the zoom ring




While looking through the viewfinder, turn the zoom ring to the right or left until you obtain the desired composition. (See page 30.)


#### 7. Selecting the Autofocus Mode

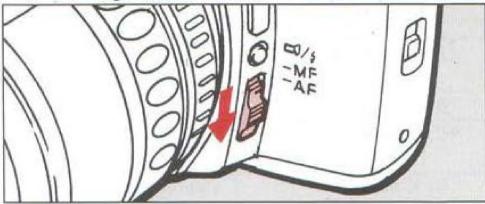

Set the focus mode switch to [ AF ]. (See page 34.)

#### 9. Focus on the subject and shoot





Focus [ ] on the subject. Depress the shutter release button fully to take a photo. (See page 35.)

## **CAMERAS AND LENS MOUNTS**

#### Lens Mount and Camera Body Compatibility Chart

Mount Type	Lens Type	Camera Model		
(A) K <sub>AF2</sub> -mount Pentax-FA lens		MZ-10/ZX-10,MZ-5/ZX-5,Z-1 <sub>P</sub> /PZ-1 <sub>P</sub> ,Z-1/PZ-1, Z-10/PZ-10,Z-20/PZ-20,Z-70/PZ-70		
(B) K <sub>AF</sub> -mount	Pentax-F lens	SFX <sub>N</sub> /SF1 <sub>N</sub> , SF7/SF10, SFX/SF-1		
(C) K <sub>A</sub> mount	Pentax-A lens	Super-A / Super Program, P30 <sub>N</sub> / P3 <sub>N</sub> , P30 <sub>T</sub>		
(D) K-mount	Pentax-M lens and Pentax lens	LX,K1000		
(E) Screw mount	SMC TAKUMAR lens	ESII,SP		

- (A) through (D): basic K-mount (bayonet) lenses.
- (A) and (B): autofocus lenses.
- (C) through (E): non-AF (manual-focus) lenses.
- (E): A screw mount lens can be fitted to the camera (A) through (D) with the optional Pentax "Mount Adapter K".
- (A) through (C): have "A" (auto) position on the lens aperture ring.

Pentax FA lenses incorporate new contacts to exchange information between the camera and lens for power zoom. Pentax FA lenses operate on existing K-mount cameras. Pentax FA lenses incorporate new contacts as follows:

- Power supply contacts
- AF coupler
- Lens-information contacts

#### KAF2-mount lens

- Power supply contacts
- · AF coupler
- Lens information contacts

#### Kar-mount lens

- AF coupler
- Lens-information contacts

#### Ka-mount lens

Lens-information contacts

K-mount lens

K-Mount Lens Compatibility

### CAMERA FUNCTIONS AVAILABLE WITH VARIOUS LENSES


Function Lens [Mount type]	FA lens [KAF2]	F lens [K <sub>AF</sub> ]	A lens	M lens [K]	S lens [Screw]
Autofocus (Lens only)	0	0	×	×	* ×
(Lens with AF Adapter 1.7X)	-	-	0 * 1	0 * 1	×
3-point autofocus	0	0	×	×	×
Manual focus (with FI) *2	○*3	○*3	○*3	- ()*3	×
(with Matte field)	0	0	0	0	0
Power zoom	○*4	×	×	×	×
Image size tracking	×	×	×	×	×
Zoom clip	×	×	×	×	×
Auto zoom effect	×	×	×	×	×
Picture Mode	○*5	○*5	0	X	X
Smart Picture Mode	0	0	×*6	X	×
Aperture-Priority AE	0	0	0	0	0
Shutter-Priority AE	○*5	○ * 5	0	×	×
Manual Exposure	0	0	0	0	0
Programmed TTL Auto Flash	0	0	0	×	×
TTL Auto Flash	0	0	0	0	0
Multi(6)-segment metering	0	0	0	×*7	×*7
Approx. f-stop indication	0	0	×	×	×

#### Notes:

- \* 1. Lenses with a maximum aperture of f/2.8 or larger. (See AF Adapter operating manual.)
- \* 2. Manual focusing using the focus indicator (FI) (O) in the viewfinder.
- \* 3. Lenses with a maximum aperture of f/5.6 or larger.
- \* 4. Pentax-FA zoom lenses with the power zoom contacts only
- \* 5. Exception of Pentax-F and FA Soft 85mm/f2.8.
- \* 6. Green Operation Mode only
- \* 7. The center-weighted metering

## HOW TO USE THIS OPERATING MANUAL

This manual is organized into the following sections, allowing you to optimize the use of the camera:

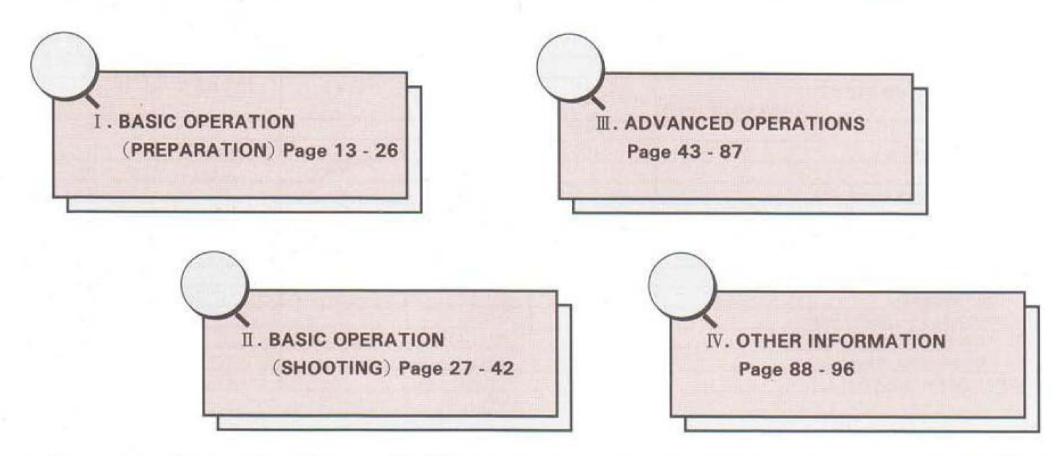

• If you want to begin taking pictures with this new camera as soon as possible, read section I and II, "BASIC OPERATION (PREPARATION)" and "BASIC OPERATION (SHOOTING)."

These sections introduce only the basic functions of this camera. More detailed information can be found in section III and section IV.

## I . BASIC OPERATION (PREPARATION)


# Desertax description of the second se

(1) ATTACHING THE CAMERA STRAP


Fit the strap on the camera as illustrated.

 There is a pocket on the strap so you can store the finder cap, release socket cover, hot shoe cover or any other small accessory as illustrated.

## (2) LOADING THE BATTERIES

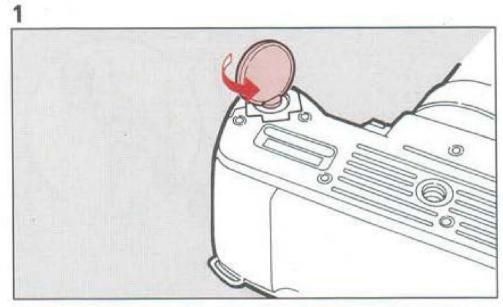


1. Open the battery chamber cover by using a coin, etc. as shown in the illustration.

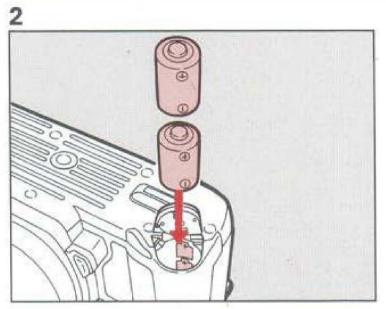


2. Load two 3V lithium batteries (CR2) or equivalent as shown in the illustration.



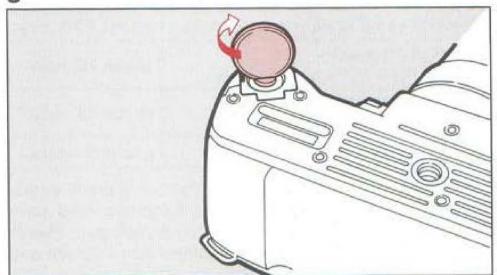

Turn the battery chamber cover screw in the direction of the arrow to lock it securely.

- When the batteries are replaced, all camera settings remain unchanged except the audible PCV signal switching, red-eye reduction flash function, exposure compensation and automatic flash function of the built-in flash.
- The optional "AA-Battery Pack F<sub>6</sub>" is also available for this camera instead of using the lithium batteries.

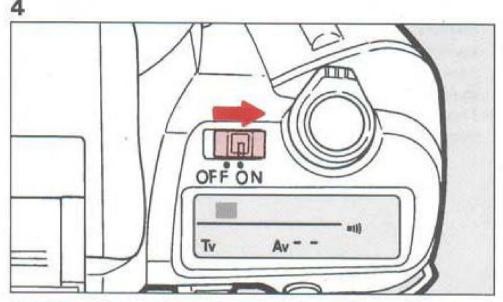


- Slide the main switch to the ON position and check that the LCD panel shows the information as shown above.
- The LCD display as shown above is given as an example and may be different if a lens is attached.

#### Battery Life (using 24-exposure film rolls)

General existing light photography	about 120 rolls
Flash photography (using flash 50% of the times)	about 20 rolls
Flash photography (using flash 100% of the times)	about 12 rolls
Bulb exposure time	about 8 hours

CR2 batteries were used under Pentax testing conditions. Actual battery life and performance may vary drastically depending on usage of Autofocus, Power zoom and external conditions such as temperature and freshness of the battery.



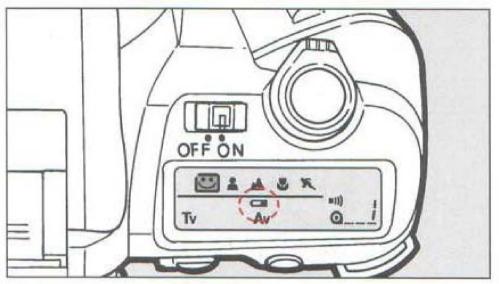


#### \* Low Battery Warning

When the batteries are nearly exhausted, the battery symbol [ appears on the LCD panel to warn you. Replace the batteries as soon as possible. See page 14 for replacing the batteries.

- When the low battery warning [ ] starts blinking, the shutter cannot be released and all indicators in the viewfinder disappear. Replace the battery as soon as possible. See page 14 for replacing the batteries.
- Replace two batteries at the same time. Do not mix battery brands, type or an old battery with a new one.
   It may cause explosion or overheating.

## (3) ATTACHING THE LENS

1

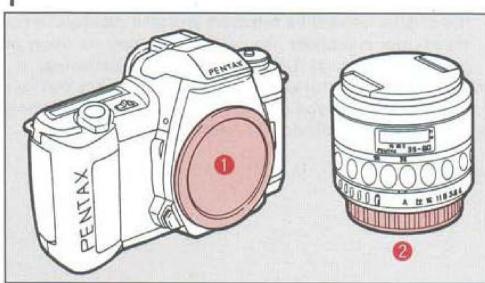


- 1. Remove the body mount cap 

  and rear lens cap 


  as shown in the illustration.
- The body mount cap is designed to protect the camera against scratches and dust at the factory. For storage, the optional accessory "Body Mount Cap K" is available.

2

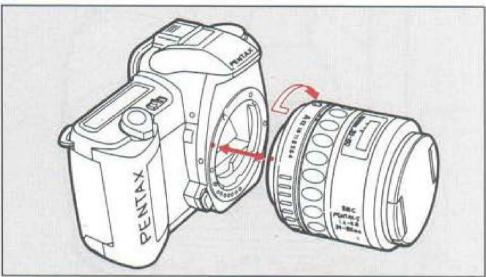


- Align the red dots on the camera and lens mount, attach the lens to the camera body, and turn it fully to the right until you hear a click.
- Ensure that the camera's main switch is in the [OFF] position before attaching an FA zoom lens to prevent unexpected operation of the lens.

3

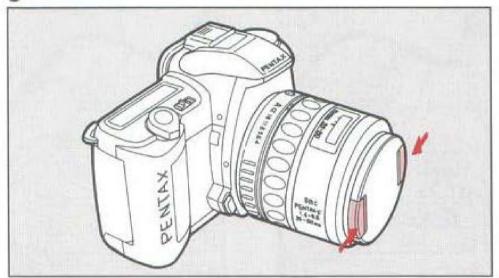

- To remove the front lens cap, squeeze the tabs on both sides in the direction of the arrow.
- We assume no responsibility nor liability for damages resulting from the use of lenses made by other manufacturers.
- The camera body and lens mount incorporate lens information contacts and an AF coupler. Dirt, dust, or corrosion may cause damage to the electrical system. Clean the contacts with a soft, dry cloth.

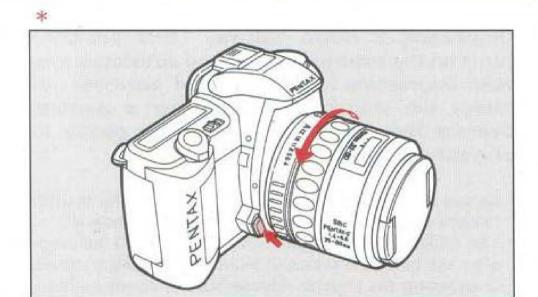



#### \* How to remove


To remove the lens, turn it to the left while depressing the lens-lock-release button.

 To protect the contacts and AF coupler of the lens against damage after removal, be sure to set the lens down with the mount side facing upward. The shutter release button has two positions. Depressing it down halfway (first position) turns on the exposure meter and autofocus system. Depressing it fully (second position) releases the shutter. When taking a picture, depress the shutter release button gently to prevent camera shake.

- Before loading a roll of film, slowly depress the shutter release button to learn where the first position is.
- The LCD indication stays on for about 10 seconds after the button is released from the halfway position.
   Depressing the shutter release button down halfway keeps the LCD indicator on.

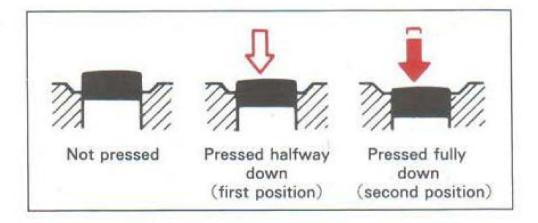





- The power is turned ON when the main switch is moved to the right.
- 2. The power is turned OFF when the main switch is moved to the left.
- When not in use, ensure that the main switch is set to the OFF position.


## (6) USING THE DATA BACK


If you purchased the DATE model, read this section.

The DATE model records data information on your photographs clearly on each frame that you expose. At each press of the DATE button as shown in the illustration, the mode on the LCD panel of the Data Back switches as indicated in the chart.

• [ M ] on the LCD indicates "Month".

 As shutter is released, the bar mark [-] in the display blinks for a few seconds that the data has been imprinted.

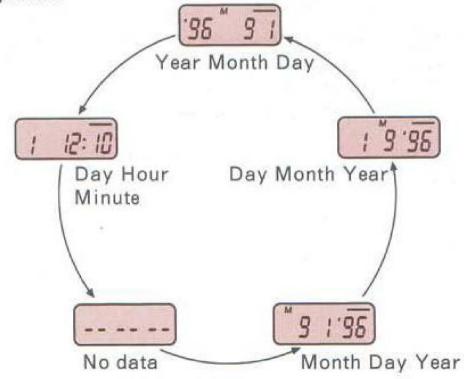

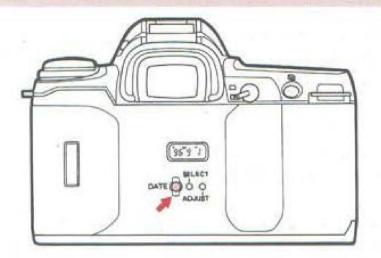

- [ -- -- ] indicates that no data will be imprinted.
- If there is a white or yellow object in the corner of the picture where the data is imprinting, the data may be difficult to read. When composing your photograph, try to avoid brightly-colored subject in that corner.
- To adjust the data, see page 73.
- The dating unit automatically switches the imprint mode between the standard and panorama according to the format selected.
- The data back operates on a 3V lithium battery. If the data imprinted on the picture or the data displayed on the LCD panel become weak or invisible, the battery may need replacing. To replace the battery see page 72.
- See page 73 for more details.


## (7) FILM LOADING


We suggest that you first operate the camera with no film loaded to become familiar with its operations.


#### Automatic film speed setting

This camera is designed to use DX-coded films with ISO ratings from 25 to 5000.

- When DX-coded film is used, the correct film speed is automatically set for the camera. If you use a non-DX coded film, you can set the film speed manually. See page 71.
- Before loading film for the first time after purchase, open the back cover and remove the protective card.
   DO NOT TOUCH THE SHUTTER CURTAINS.

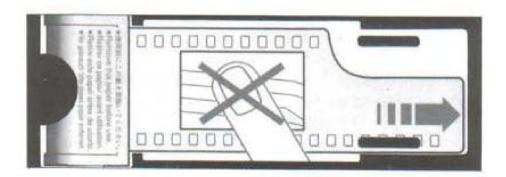






- To open the back cover, slide the back cover release lever in the direction of the arrow.
- 2. Place the film cartridge in the film chamber as shown in the illustration.
- Always load and unload film in the shade or by using your body to shade the camera.

3

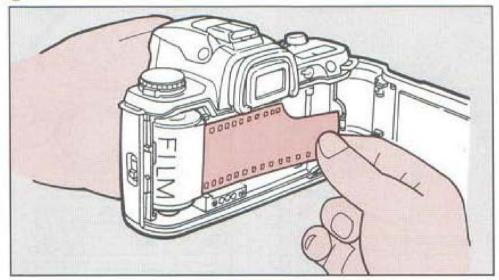


 As shown in the illustration, pull the film leader out only far enough to reach the take -up spool.

THE SHUTTER CURTAINS ARE FINE-PRECISION MATERIAL. DO NOT TOUCH THEM WITH YOUR FINGERS OR ANY OTHER OBJECT WHILE LOADING FILM.


- If you have pulled out too much film, push it back into the cartridge to reduce the slack.
- The DX information pins in the film chamber are used to read film speed. Keep them clean and free from scratches. To remove smudges, wipe them gently with a soft, dry cloth.


4

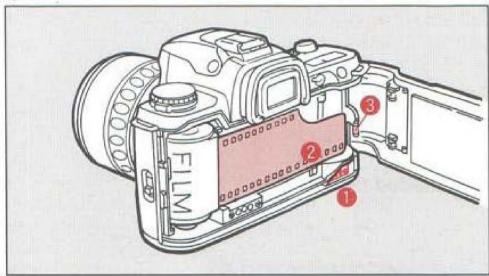


- Align the film leader with the film leader end mark 
   as shown.
- Make sure that the film leader is positioned under the film retainer 
   as shown in the illustration.
- Make sure that the film perforations properly engage on the sprocket tooth @.
- If the end of the film leader is extremely bent, straighten it or cut off the bent portion.


#### Film loaded with slack No!

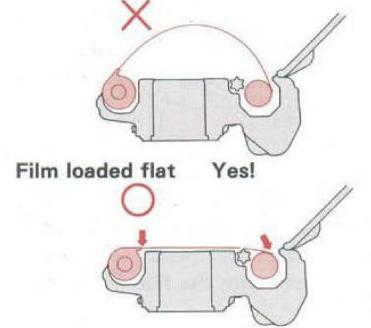




 If the film is not loaded properly, [Q\_\_\_E] on the LCD panel blinks, indicating that the film is not loaded properly.
 Open the back cover and load the film once again. 5






- Close the back cover and set the main switch to [ ON ]. The film automatically advances to the first frame.
- Check that [ ] and [ are displayed on the LCD panel.
- The film counter indication advances one each time the shutter is released.

## (8) UNLOADING FILM

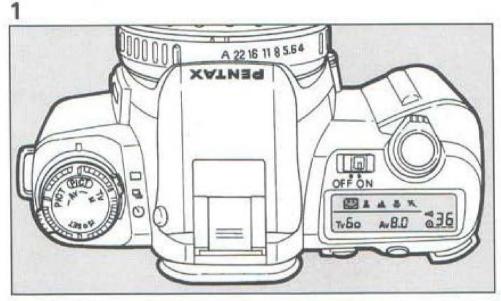


- 1. The film automatically rewinds at the end of the roll.
- During rewinding, [---] blinks on the LCD panel, indicating that the film is being rewound, the exposure counter counts frame numbers in reverse.
- Never open the back cover until the whole film roll is completely rewound.
- When removing the film from the camera, protect it from exposure to direct sun light.

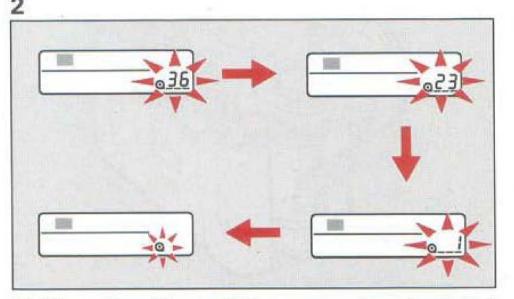

2. When the film is fully rewound, only [ a ] blinks on the LCD panel.


3

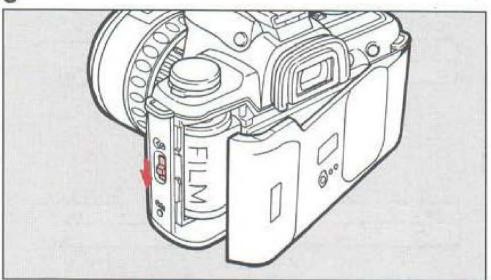

#### 3. Open the back cover and remove the film.

- A roll of 24-exposure film takes about 13 seconds to rewind.
- Before opening the back cover, check that [ Q ] is blinking.
- The shutter may be released a frame or more after the specified number of frames have been used as indicated by the number of frames on the film cartridge. However, those extra frames may be lost in processing. When you take important pictures, rewind the film when the film reaches the number of frames indicated on the film cartridge.



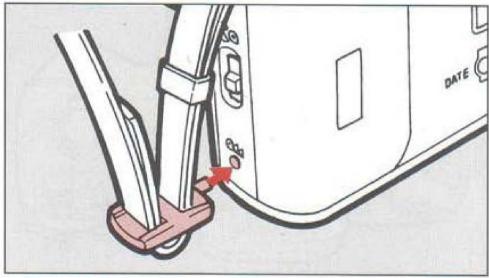

#### \* Rewinding a film in mid-roll


If you wish to unload the film before exposing all the frames, use this function.

Set the main switch to the ON position, and then depress the mid-roll rewind button by using the protruding part of the strap clamp.

- Do not depress the button with an object having a sharp tip.
- Before opening the back cover, check that [ a ] is blinking.

## (1) USING THE SMART PICTURE MODE

# II. BASIC OPERATION (SHOOTING)

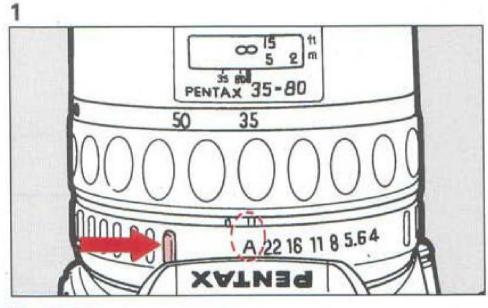


#### Purpose

This Smart Picture Mode allows you to take pictures by simply depressing the shutter release button. In this mode, the camera automatically analyzes the camerato-subject distance and the magnification of the image in the viewfinder, and it then selects one of 5 picture modes according to the requirement of the scene. See page 52 for the Picture Modes.

#### How to set


- 1. Turn the lens aperture ring to the [A] position as shown in the illustration.
- To move the lens aperture ring to the [A] position, turn the aperture ring while holding down the aperture-A lock button on the lens. The lens aperture ring can be released from the [A] position in the same manner.

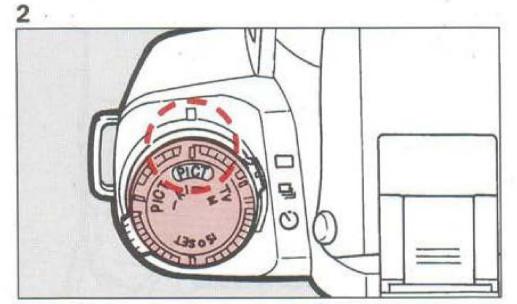

2. Set the mode dial to the [PICT] position.

- The selected picture mode is displayed in the viewfinder. [ ] is displayed on the LCD panel to indicate that the Smart Picture Mode is set.
- The Smart Picture Mode operates only when an FA or F lens is attached. The Green Operation Mode operates only with an A-lens attached.
- See page 60 to 65 for any other exposure mode.

## (2) SETTING THE SINGLE-FRAME DRIVE MODE

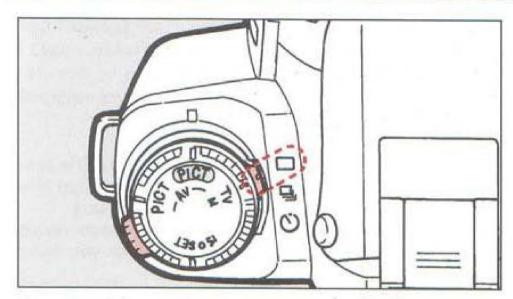

Set the drive mode switch to the [ ] position.

- One picture is taken each time the shutter release button is depressed.
- See page 43 for other available function.

## (3) USING ZOOM LENSES




Telephoto




Wide angle

Using the zoom function makes the subject appear larger (telephoto) or smaller (wide angle) in the viewfinder. Turn the zoom ring to the desired position and depress the shutter release button to take a picture.

- The smaller the number shown in the zoom scale window, the wider the angle. Conversely, the larger the number, the more magnified the image appears.
- In the Smart Picture Mode, the picture mode varies automatically according to the focal length you have set.

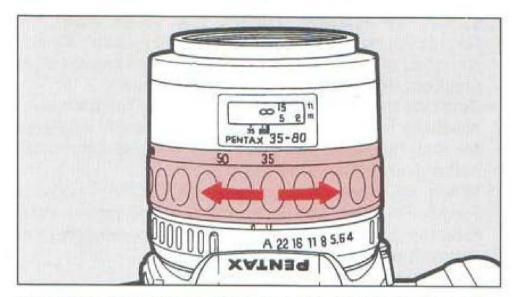



Turning the zoom ring to the right makes the subject appear larger (telephoto) and turning it to the left makes the subject appear smaller (wide angle).

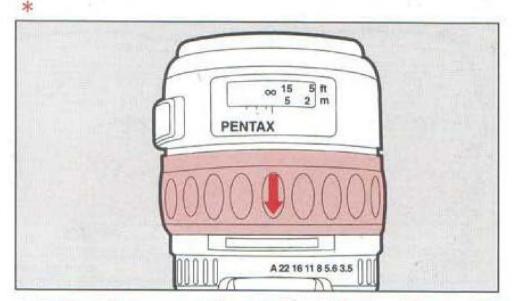

\* Using the manual zoom function with an FA zoom lens attached

Pull the power zoom ring toward the camera body until the wards [POWER ZOOM] are hidden.






- If a power zoom lens is attached, three zooming speeds are available. Turning the power zoom ring fully to the right or left zooms the lens quickly. Turning it slightly gives you slow operation. At an intermediate position, the lens zooms at medium speed.
- Zooming the lens with the power zoom function automatically focuses the lens on the subject. However, for final focusing, depress the shutter release button halfway down to focus the subject.
- When the main switch is set to [OFF] while a Pentax-FA zoom lens equipped with the power zoom function is in use, the lens automatically retracts to its shortest physical length.

#### Using the Power Zoom Function

- Push the power zoom ring forward until the words [POWER ZOOM] appear beneath the power zoom ring.
- Turning the power zoom ring to the right makes the subject larger (telephoto) and turning it to the left makes the subject smaller (wide angle). To stop zooming, release the power zoom ring.



An FA zoom lens without the power supply contacts are shown in the illustration does not have the power zoom function (ie: FA 28-70 zoom f/4 AL lens).

## (4) HOLDING THE CAMERA

Camera held horizontally




For best results, be sure to hold the camera correctly as shown in the illustrations.

Hold the camera firmly, with your left hand supporting the camera and lens as shown in the illustrations.


While taking a picture, hold your breath and gently depress the shutter release button. Sudden force on the shutter release button will cause camera shake, making the picture blurred.

#### Camera held vertically

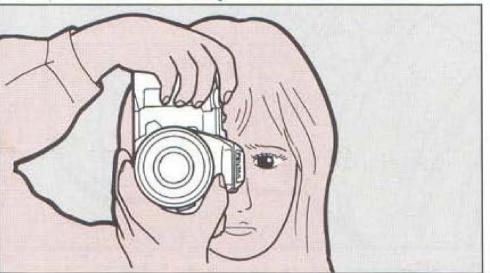

- To reduce camera shake, support your body or the camera on a solid object - a table, tree, or a wall for instance.
- When using an ultra-telephoto lens, a tripod that is heavier than the total weight of the camera and lens is recommended to avoid camera shake.
- Although there are individual differences among photographers, in general the shutter speed for a hand held camera is the inverse of the focal length. For example, 1/50 of second when the focal length is 50mm, and 1/100mm of second when it is 100mm. A tripod should be used for shutter speeds slower than this.


# (5) SELECTING THE AUTOFOCUS MODE

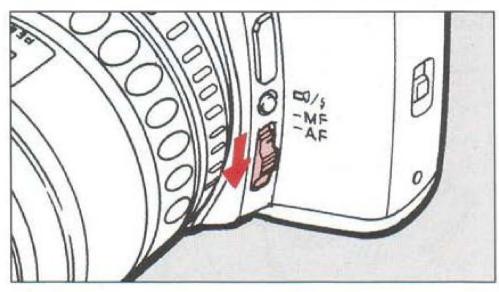

Set the focus mode switch to [ AF ].

- For autofocus operation, set the focus mode switch to [AF].
  - When you depress the shutter release button halfway down, the lens automatically focuses.
- · See page 46 for manual focusing.

# (6) TAKING A PICTURE

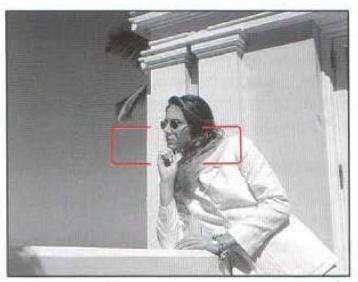



Set the focus mode switch to [ AF ].

- Focus on the subject with the AF frame
   [
   ] indicated in red in the photograph.
   When the shutter release button is depressed halfway down, the lens automatically focuses.
- When the subject is in focus, the focus indicator [○] lights up and an audible PCV beeping signal is emitted.

- As this camera incorporates the 3-point autofocus system, the subject will be focused properly even if the subject is slightly off the center of the AF frame.
- When the shutter release button is depressed halfway down, the shutter speed and aperture setting are displayed in the viewfinder and the LCD panel.
- When the Smart Picture Mode is set, the camera automatically selects one of 5 picture modes depending on the focal length you have set and the magnification of the image. The icon of the selected picture mode is displayed in the viewfinder.
- When [ ] blinks in the viewfinder and on the LCD panel, the use of the built-in flash is recommended.
   For more details on the built-in flash, see page 37.
- The audible PCV signal can be turned OFF. See details on page 67.
- During autofocus operation, the focusing ring should not be obstructed with your fingers, hands, or any other object.

The focus indicator [O] blinks when the camera is not able to obtain proper focus for one of the following reasons.

- The subject is too close. Adjust the camera-tosubject distance.
- The subject is difficult to autofocus. See "HARD-TO-AUTOFOCUS" subject on page 49.

# 3. To release the shutter, gently depress the shutter release button fully.


- The shutter cannot be released if the subject is out of focus.
- Depress the shutter release button halfway down.
   While [ ] is on, the camera-to-subject distance is fixed (focus lock). To refocus on another subject, lift your finger off the shutter release button.
- When using the SMC Pentax-F Soft 85mm f/2.8 lens, set the aperture between f/2.8 and f/4.5. See page 49 for more details.


## **Predictive Autofocus Mode**

When the camera senses subject movement during the autofocus operation, the camera will automatically switch the focus mode to the predictive autofocus mode to measure the speed of a moving subject, and predict where it will be at the moment of shutter release to maintain sharp focus on the subject.

 If the subject is moving too fast, the shutter may not be released.

# (7) BASIC OPERATION FOR THE BUILT-IN RETRACTABLE TTL FLASH (RTF)







# The Flash-Recommended Indicator

If the built-in flash is recommended, the flash-recommended indicator [ starts blinking in the view-finder and on the LCD panel when the shutter release button is depressed halfway down.

• In the Smart Picture Mode, Picture Mode and the Aperture-Priority AE Mode, the flash-recommended indicator [ \*] blinks when you attempt to photograph a subject in low light, or in a backlit situation. In the Shutter-Priority AE Mode and Metered Manual Mode, the flash-recommended indicator blinks only when attempting to photograph a subject in a backlit situation.






# Using the built-in flash

If [3A] is displayed on the LCD panel, it indicates that the automatic flash function is set. Delete it from the LCD panel. See page 42 for more details.

# 1. Push the flash pop-up button to activate the flash.

- The built-in flash starts charging automatically. When
  it is fully charged, [ \* ] appears on the LCD panel.
  When the shutter release button is depressed halfway
  down, [ \* ] also appears in the viewfinder.
- When the built-in flash is used, using a lens hood is NOT recommended as it may obstruct the path of the light coming from the flash, causing vignetting in the picture corners.

2

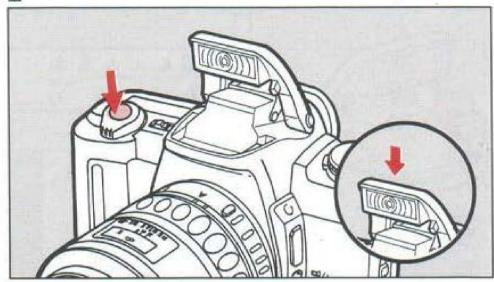

- Depress the shutter release button fully, and the flash unit discharges. After using the flash, retract the built-in flash by pressing it down into the camera body.
- The shutter cannot be released until the flash is fully charged.
- If the built in flash is used continuously, the battery may become warm, but it does not mean the battery is faulty; it is one of the battery's characteristics.
- With the built-in flash poppep-up, an external flash cannot be attached to the hot shoe. If you would like to use an external flash together with the built-in flash, see the flash connections on page 75.

# Flash effective range for the Smart Picture Mode and Picture Mode with ISO 100 (400) film used

Maximum Lens Aperture	Effective Range
f/1.4	approx. 0.8 - 3.9m (0.8- 5.6m) 2.6 - 12.8ft (2.6-18.4ft)
f/2	approx. 0.8 - 3.3m (0.8- 5.6m) 2.6 - 10.8ft (2.6-15.7ft)
f/2.8	approx. 0.7 - 2.8m (0.7- 4.0m) 2.3 - 9.2ft (2.3-13.1ft)
f/3.5,f/4.7	approx. 0.7 - 2.4m (0.7- 4.0m) 2.3 - 7.9ft (2.3-13.1ft)
f/5.6	approx. 0.7 - 2.0m (0.7- 4.0m) 2.3 - 6.6ft (2.3-13.1ft)

The effective range of the flash depends on the maximum aperture of the lens is in use.


A lens with a maximum aperture of f / 1.4 is marked as 1:1.4 on its barrel.

- This effective range table is only applicable when the exposure mode is set at the Smart Picture Mode or Picture Mode. When any other exposure mode is used, see page 69.
- The minimum effective range is always 0.7m (2.6ft) even if a lens with a maximum aperture f / 2.8 or smaller is in use. When a subject is shot at a distance closer than 0.7m (2.6ft), the correct exposure cannot be obtained, and you will see vignetting in the picture corners.

# Inappropriate lens warning when the built-in flash is used


When using an inappropriate F- or FA- lens, [ \$ ] will blink in the viewfinder and on the LCD panel when the shutter release button is depressed halfway down. For more details on COMPATIBILITY OF F AND FA LENSES WITH THE BUILT-IN FLASH, see page 70.

- Taking a picture while this warning is displayed may cause vignetting in the picture corners or semicircular vignetting at the bottom of the picture.
- When lenses other than an F or FA are used, this warning will not appear.




# Depress the multi-function button with the built-in flash popped up

At each press of the multi-function button, the flash mode on the LCD panel switches as shown in the chart.

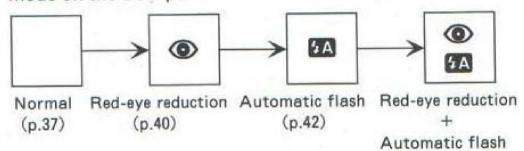


 When the built-in flash is retracted, depressing the multi-function button switches the audible PCV signal ON and OFF. 1

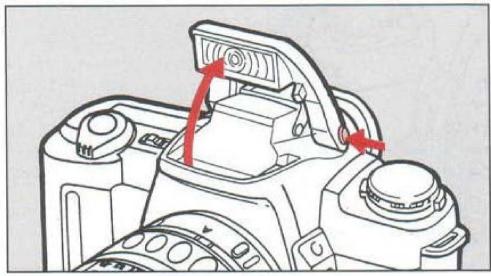


# Red-eye Reduction Flash Function

This camera includes a red-eye reduction flash function, which reduces the red-eye phenomenon utilizing preflash. In this mode, the preflash is discharged just before the shutter is released which reduces the diameter of the pupil of the eye. Then the main flash is discharged while the pupils are smaller, which in turn reduce the red-eye effect.







### How to set

- Push the flash pop-up button to activate the flash.
- 2. Depress the multi-function button until [ appears on the LCD panel.

### How to cancel


With the built-in flash popped up, depress the multifunction button until [ disappears on LCD panel.

- When the AF500FTZ is attached and the slave flash function is in use, the Red-eye reduction flash function cannot be used as the slave flash is discharged when the preflash of the built-in flash is discharged.
- When only a dedicated flash is in use and is discharged, the red-eye reduction display from the LCD panel is disregarded.

# About Red-eye Phenomenon

Shooting portraits with flash in a dark environment often causes a subject's eyes to turn out reddish in the print. This phenomenon, commonly known as "Red-Eye", is caused by the reflection of the electronic flash in the retina of your subjects eye. It can be reduced by taking the photo in a brighter light condition or by shooting with a wider angle lens at a closer distance, or by employing the red-eye reduction flash feature. When using a Pentax dedicated flash unit off the camera, it may also help to position the flash as far away from the camera as possible.

1

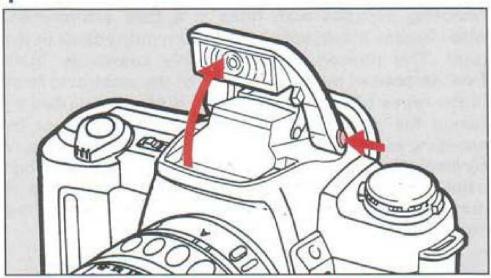


# **AUTOMATIC FLASH FUNCTION**


This is a convenient built-in flash mode that the flash discharges only when it is necessary even if the flash is in the popped-up position.

### How to set

- Push the flash pop-up button to activate the flash.
- 2. Depress the multi-function button until [A] appears on the LCD panel.







- In the Smart Picture Mode and Picture Mode, the flash will only discharge when the subject is in a low light or backlit condition.
- Depress the multi-function button with the built-in flash in its popped up position. If the button is depressed with the built-in flash in its retracted position, the PCV audible beep mode will be switched on.

## How to cancel

With the built-in flash in its popped up position, depress the multi-function button until [4A] disappears on the LCD panel.

# (1) SELECTING A DRIVE MODE 48

This camera has a total of three drive modes as shown.

# **Types of Drive Modes**

# Single-Frame Mode

[ ]: One picture is taken each time the shutter release button is depressed.


# Consecutive-Frame Mode

[ ]: Pictures can be taken consecutively while holding down the shutter release button. See page

# Self-timer Mode

[8]: A picture will be taken with a 12-second-delay. See page 44.

# III. ADVANCED OPERATIONS

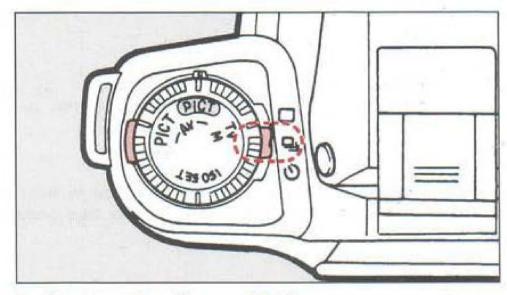


## 1. Consecutive-Frame Mode

Consecutive pictures can be taken by holding down the shutter release button.

### How to set

Set the drive mode switch to [4].

- The camera focuses on the subject frame by frame in this mode.
- The shutter cannot be released while the built-in flash is being charged.

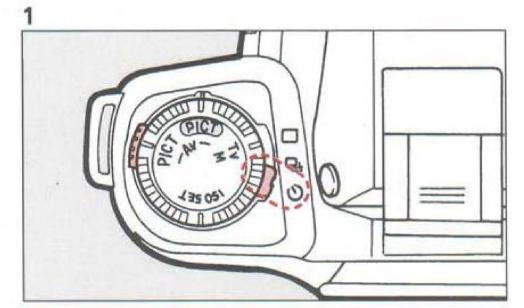


## 2. Self-Timer Mode

The self-timer mode delays the shutter release, and is useful for taking group shots that include the photographer. The shutter will be released about 12 seconds after the shutter release is depressed.

## How to set


1. Set the drive mode switch to [3].

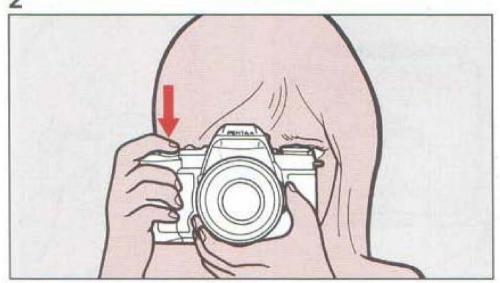


- Focus on the subject first using the autofocus frame and by depressing the shutter release button halfway down. Then depress the shutter release button fully.
- The shutter will be released about 12 seconds later.
- When the self-timer is in operation, the audible PCV signal is heard and the rate increases for the last two seconds.

### How to cancel


To cancel the self-timer operation after it has been activated, move the drive mode switch to a position other than [3].





- \* Underexposure may occur if light enters the viewfinder during self-timer operation. If you intend to move away from the viewfinder, attach the supplied finder cap as shown in the illustration.
- \* When using accessories such as the finder cap, remove the Eyecup F<sub>H</sub>. The Eyecup F<sub>H</sub> comes from the factory fitted to the camera's viewfinder accessory grooves.


# (2) MANUAL FOCUSING

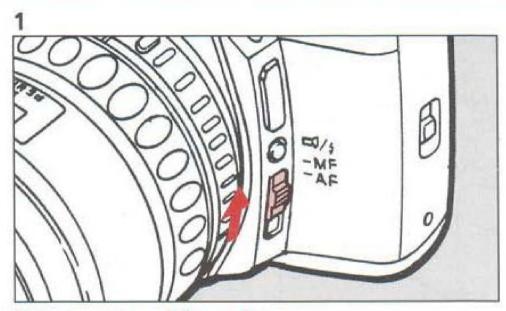


# Using a manual-focus lens

When mounting a non-autofous lens with a maximum aperture of f/5.6 or larger (f/1.2 to f/5.6), you can use the manual focus mode to focus the lens with the aid of the in-focus indicator  $[\ \ \ \ \ \ ]$  in the viewfinder.

When the subject comes into focus, the focus indicator [O] lights up in the viewfinder and an audible PCV signal is heard. The audible PCV signal can be canceled. See page 67.






## How to focus


- 1. Set the focus mode switch to [MF].
- While looking through the viewfinder, turn the focusing ring to the right or left while holding the shutter release button halfway down.
- 3. When the subject comes into focus, the infocus indicator [ ] lights up in the view-finder. Depress the shutter release button fully to take the photograph.
- If an old type screw-mount lens is used with an optional Mount Adapter K, the in-focus indicator in the viewfinder cannot be used.

# When the autofocus mode or the in-focus indicator is unsuitable for focusing

When the autofocus function or the viewfinder's infocus indicator [O] cannot be used for focus confirmation for the following reasons, focus on the subject in the manual focus mode with the aid of the matte field in the viewfinder as you would with a non-AF SLR camera.

- a) The in-focus indicator [O] blinks because the subject is difficult to autofocus.
- b) The maximum aperture of the lens in use is smaller than f / 5.6.
- c) A bellows 100mm f/4, Shift 28mm f/3.5 (shifted), or Reflex lens are in use.
- d) An old type screw-mount lens fitted with an optional "Mount Adapter K".





# How to focus on the subject

- 1. Set the focus mode switch to [MF].
- While looking through the viewfinder, turn the focusing ring to the right or left until the image in the viewfinder is clearest.

# Using the snap-in focus function

When the subject comes to the point where the lens was prefocused, the shutter is automatically released.

## How to use

- 1. Use a non-autofocus lens.
- 2. Set the focus mode switch to [AF].
- Focus at the point where you wish to capture the subject.
- Using the optional "Cable Switch F", keep the trigger release button depressed so that the autofocus and metering systems stay active.
- The camera releases the shutter automatically when the subject comes into focus at the point selected.

## HARD-TO-AUTOFOCUS SUBJECTS

The autofocus system is highly precise, but not perfect. Depending on the brightness, contrast, shape, and size of your subject, the autofocus system may not operate. In such a case, set the focus mode switch to [MF] and use the manual focus mode to focus the lens on the subject with the aid of the matte field in the viewfinder (see page 48).

Situations that may fool the autofocus system include:

- a) Extremely low-contrast subjects such as a white wall in the autofocus frame [ ].
- b) Subjects which don't reflect much light in the autofocus frame [ ].
- c) Subjects which are moving too fast.
- d) Multiple subjects in the foreground and background of the autofocus frame [□ □].
- e) Subjects positioned against reflected light or strong backlight or with extremely bright backgrounds.

# Using a Polarizing Filter

When using an ordinary polarizing filter; the half mirror incorporated into the autofocus system reduces the effectiveness of the autofocus function when used in combination with an ordinary polarizing filter. Use a CIRCULAR POLARIZING FILTER for proper autofocus operation.

## Notes on accessories

The following conditions do not allow autofocusing or manual focusing with the in-focus indicator in the view-finder. Use the manual focus mode to focus on the subject with the aid of the matte field surrounding the autofocus frame.


- a) When using special effect filters or "Magic Image Attachment" or "Stereo Adapter".
- b) When using Extension Tubes or an Auto Bellows for close-up photography.

# Note on the SMC Pentax F SOFT 85mm f / 2.8 lens

When shooting at a distance closer than approx. 1.5m (4.9ft), set the lens to a manual f-stop setting between f/2.8 and f/4.5. A smaller aperture (f/5.6 to f/32) may cause the autofocus system and the viewfinder's in-focus indicator to malfunction. To remedy this problem, temporarily set the lens to f/4.5. After focusing on the subject, lock focus, and set the lens to the required f-stop.

The FA Soft lens is not required above procedures.

# (3) TAKING PANORAMA FORMAT PICTURES

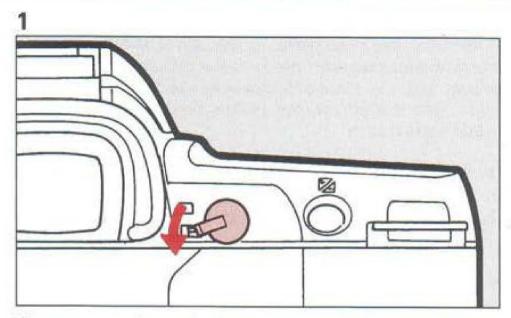

If you purchased the camera with the panorama function, read this section.

You can switch between the panorama format and standard format picture taking mode in the middle of the roll by moving the panorama lever. The panorama format picture allows dynamic pictures to be taken (the panorama format is approximately 13x36mm on the film).

- 1. Turn the panorama lever to [ 121] to select the panorama format mode.
- Compose the scene within the panorama format frame in the viewfinder.

2



- When the panorama lever is switched to panorama, the viewfinder switches to the horizontal panorama format frame.
- Ensure that the panorama lever is turned fully to the position you selected.
- What appears on the extreme edges of the panorama frame may be cut off in the development process.
   Compose your picture with a margin of safety.


# NOTES ON THE DEVELOPMENT OF PANORAMA FORMAT PICTURES

With panorama format pictures, only the middle area of the frame is exposed. The number of exposures available in the panorama format is equivalent to that of the standard photo size.




- When developing the film, if you have taken only panorama format pictures on the entire roll of film, tell the clerk at the processing lab to develop the film with only the panorama format. If there are both panorama and standard format pictures on the film, ask the clerk to develop the film with both standard and panorama format.
- The development of panorama format pictures is a more time-consuming and expensive process than that of standard pictures. Please consult the processing lab for more details.
- Panorama format processing facilities differ depending on the area and requirement. Your local film processor or camera dealers will advise you on all options available to you.
- When the panorama format pictures are printed with a standard size format, the black cropped areas will appear
  at the top and bottom of the picture.

# (4) USING THE PICTURE MODE

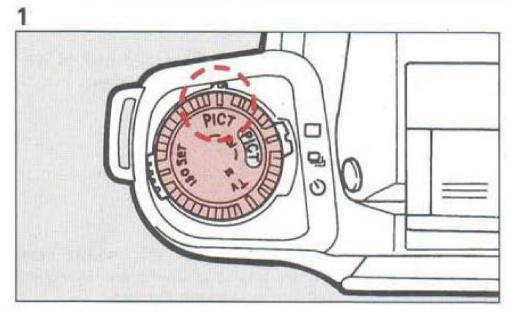

# Purpose


The camera incorporates the Smart Picture Mode function. In this mode, the camera automatically selects one of 5 picture modes depending on the focal length you have set and the image magnification. You can also select your desired Picture Mode manually. The picture mode has a total of 5 modes as follows. See details for each mode on page 53 - 57.

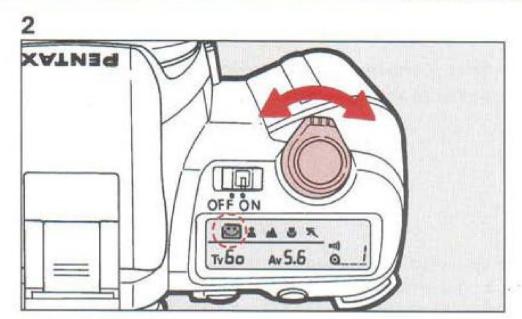

## How to set

Set the lens aperture ring to [ A ].

- 1. Set the mode dial to [ PICT ].
- To select the desired picture mode, move the select switch until [ ] superimposes on the picture mode displayed on the LCD panel.

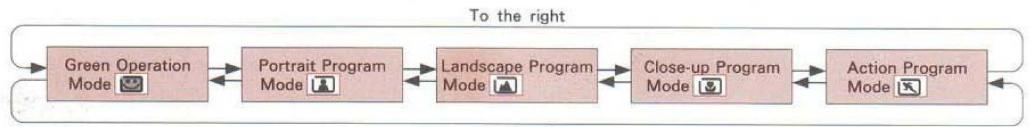


# \*


# \* Exposure Warning

If the subject is too bright or too dark, the shutter speed and aperture setting in the viewfinder will blink. If the subject is too bright, select a darker subject. Use a flash if the subject is too dark.

# Green Operation Mode



Av 5.6



For easy picture taking, use the Green Operation Mode. You simply depress the shutter release button. The camera selects the best combination of aperture and shutter speed setting.

## How to set:


TV60

Set the mode dial to [ PICT ].

Move the select switch until [ superimposes on [:].

 When the shutter release button is depressed halfway, [ ] will be displayed in the viewfinder. The shutter speed and aperture setting are also displayed in the viewfinder and on the LCD panel.

# Portrait Program Mode

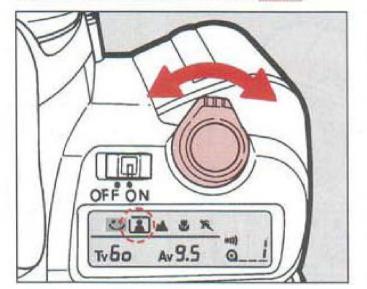





This mode is suitable for taking portrait photography.

## How to set


Set the mode dial to [ PICT ].

Move the select switch until [ superimposes on [ ].


 When the shutter release button is depressed halfway down, [ ] is displayed in the viewfinder. The shutter speed and aperture setting are also displayed in the viewfinder and on the LCD panel.

In this mode, the telephoto lens produces a portrait in crisp focus against the out-of-focus background, while the wide angle lens enables you to shoot group photography or snapshots in sharp and clear focus with the extended depth-of-field.

# Landscape Program Mode

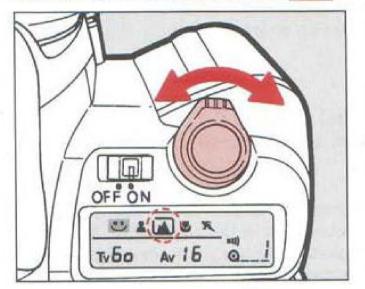



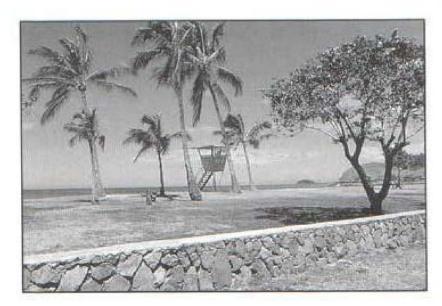

This mode is ideal for landscape photography and scenic snapshots.

## How to set


Set the mode dial to [ PICT ].

Move the select switch until [ superimposes on [ ].

 When the shutter release button is depressed halfway down, [ ] is displayed in the viewfinder. The shutter speed and aperture setting are also displayed in the viewfinder and on the LCD panel.

# Close-up Program Mode



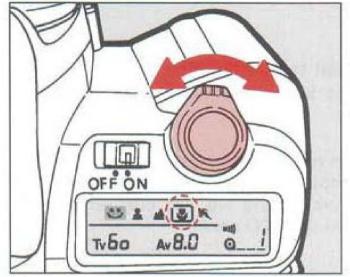





This mode is useful for close-up photography.


This mode favors smaller apertures to maximize the depth of field, ensuring sharp focus of a close-up subject.

### How to set

Set the mode dial to [ PICT ]. Move the select switch until [ ] superimposes on [ & ].

 When the shutter release button is depressed halfway down, [ ] is displayed in the viewfinder. The shutter speed and aperture setting are also displayed in the viewfinder and on the LCD panel.

# Action Program Mode

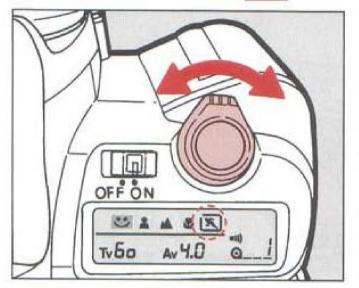





This mode selects a faster shutter speed to capture a moving subject.

## How to set


Set the mode dial to [ PICT ].

Move the select switch until [ ] superimposes on [ ].

 When the shutter release button is depressed halfway down, [S] is displayed in the viewfinder. The shutter speed and aperture setting are also displayed in the viewfinder and on the LCD panel.

This mode freezes the action and prevent blurred images. This mode is especially convenient for active photography. It is also suitable for portraits with blurred background.

# (5) SELECTING AN EXPOSURE MODE

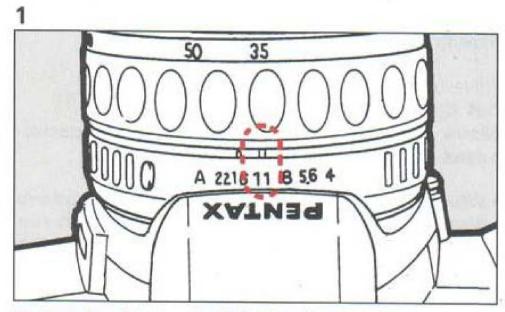

Using the Aperture-Priority AE Mode


# Purpose


When the desired aperture is selected, an appropriate shutter speed is automatically set by the camera for a proper exposure. This mode is ideal for shooting land-scapes with increased depth of field, or a portrait against a blurred background. For details on the effect of the aperture setting, see page 85.



## How to set

- 1. Set the lens aperture ring to the desired fstop other than [ A ].
- 2. Set the mode dial to [PICT] or [ PICT].

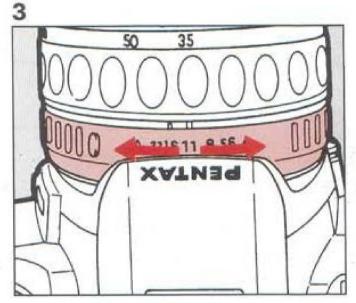




# 3. Set the desired f-stop.

- When an F or FA lens is used, an approximate aperture indication will appear in the viewfinder when the shutter release button is depressed halfway. When lenses other than an F or FA series are used, no approximate aperture indication will appear in the viewfinder.
- When the Pentax-A 50mm f/1.2 lens is in use with the lens aperture ring set at a position other than the [A] position, the center-weighted metering mode will be set instead of the multi-metering mode. As the exposure will come out about 1 stop overexposed, set the lens aperture ring to [A] or adjust the exposure deliberately 1 stop under.



\* Exposure Warning


If the subject is too bright or too dark, the selected shutter speed will blink in the viewfinder and on the LCD panel as a warning as shown. When the subject is too bright, choose a smaller aperture, if available; when it is too dark, choose a larger aperture, if available. When the shutter speed indication stops blinking, you can take the picture. If both shutter and aperture blink, it means that the exposure is out of metering range, unable to obtain a correct exposure even if the aperture is adjusted. Select a darker subject if it is too bright, or use a flash if it is too dark.

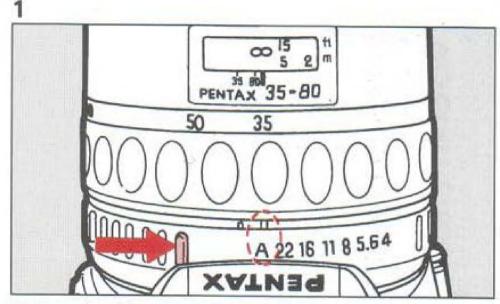

Using the Shutter-Priority AE Mode


# Purpose

When the desired shutter speed is selected, the appropriate aperture is automatically set by the camera for a proper exposure according to the brightness of the subject. This mode is suitable for freezing the action with a fast shutter speed or capturing a flowing dynamic image with a slow shutter speed. For details on the effect of the shutter speed, see page 84.

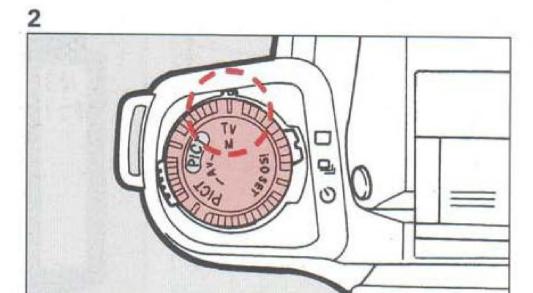

## How to set

- 1. Set the lens aperture ring to [ A ].
- 2. Set the mode dial to [ Tv ].

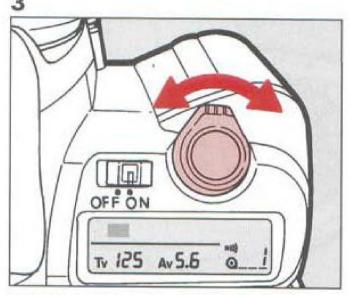




- 3. Select the desired shutter speed by moving the select switch.
- When the shutter release button is depressed halfway down, the shutter speed and aperture value will be displayed in the viewfinder and on the LCD panel.



# \* Exposure Warning

If the subject is too bright or too dark, the shutter speed and aperture setting in the viewfinder blink. When the subject is too bright, choose a faster shutter speed. If it is too dark, choose a slower shutter speed. When the shutter speed indication stops blinking, you can take the picture. If both selected shutter speed and aperture blink, it means that the exposure is out of metering range, unable to obtain a correct exposure even if the shutter speed is adjusted. Select a darker subject if the subject is too bright. Use a flash if it is too dark.

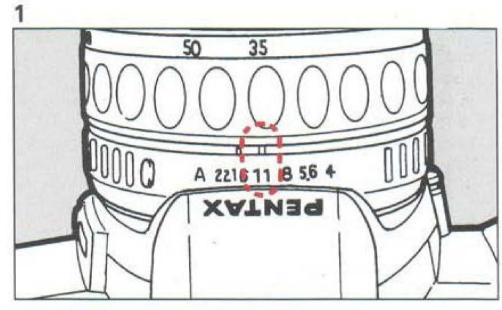

Using the Metered Manual Mode


# Purpose

The manual exposure mode is a convenient exposure mode for taking pictures using the same shutter speed and aperture setting combination, or taking creatively under or overexposured photographs.



## How to set

- Set the lens aperture ring other than the [A] position.
- 2. Set the mode dial to [ Tv ].
- [ M ] appears on the LCD panel to indicate that the Manual Exposure Mode is set.

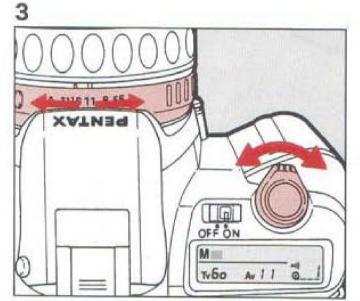





- To obtain the proper exposure, turn either the select switch or lens aperture ring until the dot is displayed in the center of the bar graph in the viewfinder.
- When the shutter release button is depressed halfway down, the shutter speed, approximate aperture and bar graph will be displayed in the viewfinder. When lenses other than an F or FA lens is used, no approximate aperture indication will appear in the viewfinder.
- Turn either the select switch or lens aperture ring until the dot is displayed in the center of the bar graph. When the dots are displayed to the [♥] side on the bar graph, it indicates overexposure and when the dots are displayed to the [♥] side, it indicates underexposure.


- Moving one dot on the bar graph indicates 0.5 step (0.5EV). However, when under or over exposure is set beyond + 2 or - 2 steps (2EV), [♠] or [♠] indicator will blink.
- When using a Pentax- A 50mm f/1.2 lens with the lens aperture ring set other than the A position, the center weighted metering mode will be set instead of the multi-metering mode. As the exposure will come out about 1 stop over, set the lens aperture ring to [ A ], or adjust the exposure deliberately 1 stop under.

# \* Exposure Warning

If the subject is too bright or too dark, both shutter speed and aperture setting will blink in the viewfinder as a warning as shown. It means that the exposure is out of metering range, unable to obtain a correct exposure even if the aperture is adjusted. Select a darker subject or use a flash if it is too dark.



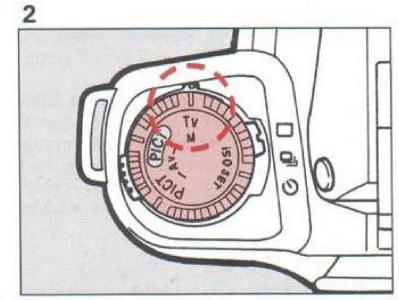





**Bulb Exposure Mode** 


Purpose

This mode is useful for the long exposures required for shooting night scenes and fireworks. The shutter remains open as long as the shutter release button is held down.


## How to set

- Set the lens aperture ring to the desired fstop other than [ A ].
- 2. Set the mode dial to [ Tv ].
- 3. Adjust the shutter speed to slower side by moving the select switch until [bu] appears on the LCD panel.

- [ M ] appears on the LCD panel and [ ] is displayed in the viewfinder to indicate that the Bulb Exposure Mode is set.
- When the shutter release button is depressed halfway down with an F and FA lens in use, the approximate aperture will be displayed in the viewfinder. When lenses other than an F or FA series are used, no aperture will appear.

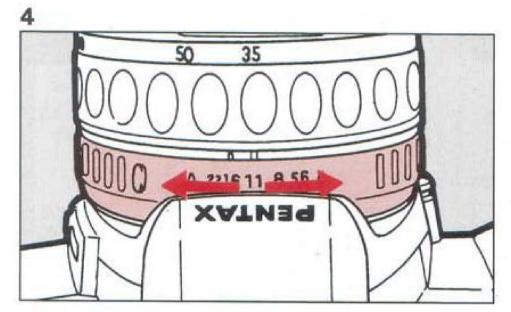


- Select the desired aperture by the lens aperture ring.
- Up to approx. 8 hours of time exposure are possible with a new lithium battery at room temperatures.

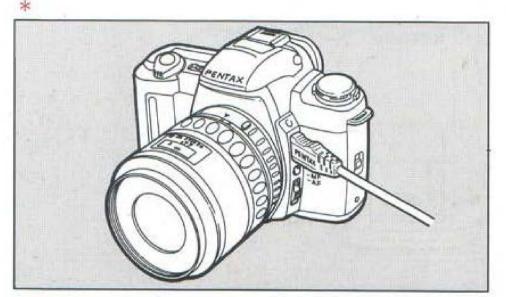

\* When using this mode, use a steady tripod to prevent camera shake and attach the optional "Cable Switch F" after removing the Release Socket Cap F.

# (6) ABOUT EXPOSURE COMPENSATION

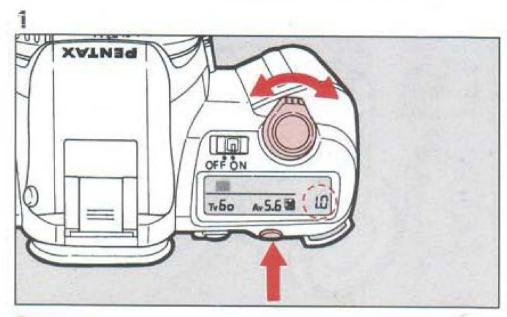


# Purpose

The exposure compensation allows you to deliberately overexposure (brighten) or underexposure(darken) a subject, or compensate for difficult lighting conditions which may fool the camera's built-in exposure meter.

### How to set

- While holding down the exposure compensation button, move the select switch to the desired compensation value.
- The bar graph which indicates the compensation value and [ ] appear in the viewfinder.
   is displayed on the LCD panel.

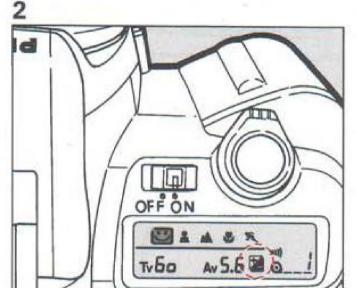




- Exposure compensation does not work in the Smart Picture Mode, Metered Manual Mode and Bulb Exposure Mode.
- The exposure compensation range is -3EV to +3EV in 0.5EV stops.
- Moving one dot on the bar graph indicates 0.5EV step.
   However, when under or over exposure is set beyond
   +2 or 2 steps (2EV), the dot will blink.

## How to cancel

Set the compensation value to [0]. The exposure compensation cannot be canceled even if the power is turned OFF or any other exposure mode is set.

# (7) TURNING OFF THE AUDIBLE PCV SIGNAL

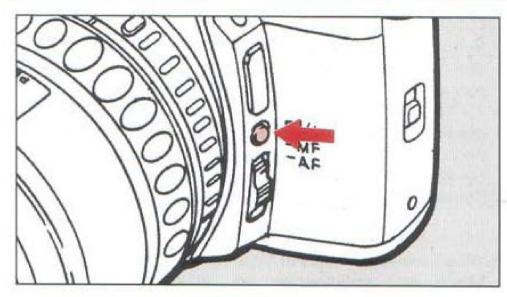

The audible In-Focus PCV signal can be turned off.

# How to cancel

Depress the multi-function button to erase [\*\*\*) ] from the LCD panel.

- Change the PCV Signal Mode only when the built-in flash is retracted. If the PCV Signal Mode is switched with the built-in flash popped up, the flash mode will be changed.
- The audible PCV signal is not turned off when the Self-Timer is in operation.
- To turn the audible PCV signal back on, depress the multi-function button to make the [=1) appear on the LCD panel.

# (8) ADVANCED OPERATION FOR THE BUILT-IN FLASH (RTF)

# When using the Smart Picture Mode or Picture Mode

- The camera automatically chooses an optimum combination of shutter speed and aperture according to the subject brightness, allowing you to take a flash photograph with ease.
- The shutter speed automatically changes to approximately 1/100 sec. or to a slower speed which does not cause camera shake. The slowest shutter speed depends on the focal length of the lens fitted to the camera. When a Pentax non-AF lens is used, the camera uses the shutter speed of 1/100 second.

# When using the Shutter-Priority AE Mode

- Shutter speeds slower than 1/100 of second can be set.
- In this mode, the aperture automatically changes according to the ambient brightness, making flash photography easy.

# When using the Aperture-Priority AE Mode

• In this mode, the shutter speed automatically changes with the ambient brightness, making flash photography easy. The shutter speed changes in the range of 1/100 sec. to a slower shutter speed which does not cause camera shake. The slowest shutter speed depends on the focal length of the lens in use. The shutter speed of 1/100 sec. is automatically set when a Pentax non-autofocus lens is in use.

## Metered Manual Mode

 When using the built-in flash in the Metered Manual Mode, any combination of aperture and shutter speed slower than 1/100 can be set. In this mode, the exposure of the background can be controlled by the manual exposure while the flash properly exposes the foreground subject.

# Calculating the flash effective distance according to the camera-to-subject distance.

Maximum flash distance = Guide Number ÷ Selected aperture

Minimum flash distance = Maximum flash distance  $\div$  5 \*

When the distance to the subject is less than 0.7m (2.3ft), the flash cannot be used. If the flash is used within that distance, it causes vignetting in the picture corners, light is distributed unevenly and the picture may be overexposed.

 The value 5 used in the formula above was obtained from the built-in flash.

The guide number (GN) depends upon the film speed used as shown below.

ISO25 → GN5.5	ISO200 → GN15.6
ISO50 → GN7.8	ISO400 → GN22
ISO100 → GN11	

If an ISO100 film is used at an aperture of f/2.8, the flash effective distance is obtained as follows:

Guide Number (11) 
$$\div$$
 f/2.8 = 3.9m  
3.9  $\div$  5 = 0.8m

Thus, the flash effective distance is from approx. 0.8m to 3.9m.

# Calculating the aperture according to the camera-to-subject distance

Aperture = Guide Number ÷ Camera-to-subject distance

If the calculated aperture value is different than an indicated f-stop on the aperture ring, for instance f/3, choose the next smallest aperture ring number (f/2.8 in this case).

# Calculating the camera-to-subject distance in the Shutter-Priority AE Mode

The camera-to-subject distance can be calculated using the above mentioned formula. However, in the Shutter-Priority AE Mode, the-camera-to-subject distance will change depending on what aperture is set.

#### COMPATIBILITY OF F AND FA LENSES WITH THE BUILT-IN FLASH


 $[\bigcirc = \text{compatible } \times = \text{incompatible because of vignetting}]$ 


Lens name	Compatibility
F Fish-Eye Zoom 17-28mm f/3.5-4.5	×
F Zoom 24-50mm f/4	△*1
FA Zoom 28-70mm f / 4	0
FA*Zoom 28-70mm f/2.8	×
FA Zoom 28-80mm f/3.5-4.7	0
F Zoom 28-80mm f / 3.5-4.5	△*2
FA Zoom 28-105mm f/4-5.6	△*3
F Zoom 35-70mm f/3.5-4.5	0
F Zoom 35-80mm f / 4-5.6	0
F Zoom 35-105mm f/4-5.6	0
F Zoom 35-135mm f/3.5-4.5	0
FA Zoom 70-200mm f / 4-5.6	0
F Zoom 70-210mm f/4-5.6	0
FA*Zoom 80-200mm f/2.8	△*4
F Zoom 80-200mm f / 4.7-5.6	0
F Zoom 100-300mm f / 4.5-5.6	0
FA Zoom 100-300mm f / 4.5-5.6	0
F or FA* Zoom 250-600mm f/5.6	×


Lens name	Compatibility
FA20mm f/2.8	×
FA*24mm f/2	×
F or FA 28mm f/2.8	0
F or FA 50mm f / 1.4	0
F or FA 50mm f / 1.7	0
FA*85mm f/1.4	0
F or FA 135mm f / 2.8	0
FA*200mm f/2.8	0
FA*300mm f/2.8	×
F or FA*300mm f / 4.5	×
F or FA*600mm f/4	- ×
F or FA MACRO 50mm f/2.8	0
F or FA MACRO 100mm f/2.8	0
F or FA Soft 85mm f/2.8	0

- \* 1 : Focal lengths between 28-50mm, vignetting will not occur But, inappropriate lens warning will appear at focal lengths between 24-35mm.
- \* 2 : Vignetting will occur at focal lengths between 28-35mm.
- \* 3 : Vignetting will occur at focal lengths between 28-35mm. With the focal length set at 35mm, it will occur when the camera-to-subject distance is closer than 1.5m.
- \* 4 : Vignetting will occur at focal lengths between 80-90mm.

# (9) SETTING THE FILM SPEED (ISO) MANUALLY








This camera automatically reads the film speed from the film's DX code. However, the film speed setting can be changed. If you use a non-DX coded film, set the film speed manually.

#### How to set

- Set the mode dial to [ISO SET].
- Move the select switch until the desired ISO is displayed on the LCD panel.

- 3. After the ISO is set, set the mode dial to any other position other than [ ISO SET].
- To change the ISO, turn the select switch to the left for a smaller number (lower film speed, or right for a larger number (higher film speed).
- The shutter cannot be released with the mode dial set at [ISO SET].
- [ ISO ] is displayed on the LCD panel when the film speed is set manually.

## (10) INSTALLING THE BATTERY IN THE DATA BACK

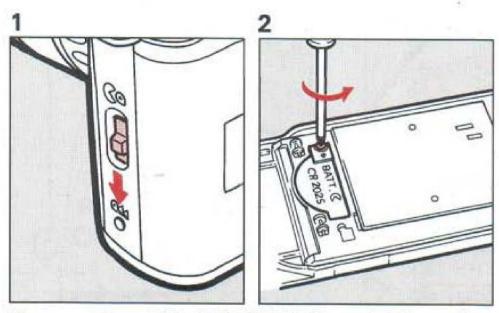


If you purchased the DATE MODEL, read this section.

Replace the battery when the data information on a picture or the LCD panel becomes weak or invisible.

The battery will last for approx. 3 years.


- Ensure that a film is not loaded, then open the back cover.
- Loosen the battery cover fixing screw with a phillips head screwdriver, and then remove the battery chamber cover.
- 3. Replace the old battery with a new battery with the + side facing up.
- 4. Reinstall the battery chamber cover, and tighten the battery chamber fixing screw.

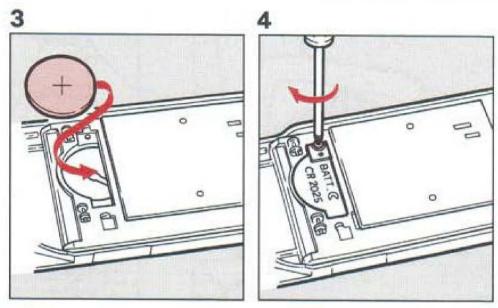

- If the data indication does not appear on the LCD panel, it means that the battery has not been installed properly or the battery voltage is too low.
- After the battery is replaced, adjust the data by the following adjustment procedures described on the next page.
- The data back uses one 3V lithium battery, type CR2025.

# ADVANCED OPERATIONS

## (11) ADJUSTING THE DATA

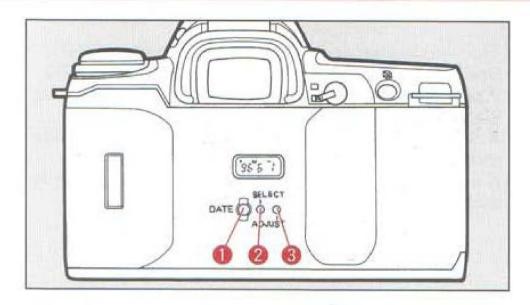



If you purchased the DATE MODEL, read this section.

- DATE button
- @ SELECT button
- **®** ADJUST button

#### Note:

Carefully press the button with the protrusion part of the camera's strap clamp.

Do not press the buttons with an object having have a sharp tip.

## Adjusting the year / month / day

- Press the SELECT button @ to make the year, month or day you want to change blink.
- 2. Change the date with the ADJUST button
- Press the SELECT button @ to stop the digit from blinking, after you have changed the date. The adjusted date has been entered.
- The digit increases by one each time the ADJUST button is depressed. Holding the button for about 2 to 3 seconds will change the digits continuously.

### Adjusting the hour/minute

- 1. Press the SELECT button @ to make the hour, minute or second (:) you want to change blink.
- 2. Change the data (hour or minute) with the ADJUST button 6.
- 3. To change the second (:), press the SELECT button @ until ": " will blink. And press the ADJUST button @ in sync with a time signal to set the second to zero.
- Press the SELECT button @ to stop the adjusted hour/minute from blinking.
- The digit increases one each time you press the ADJUST button. Holding the button for 2 to 3 seconds will change the digits continuously.

#### Operational precautions

- The working temperature for data printing is 0-50℃.
- Use DX-coded films with ISO rating from 25 1600.
- If high-speed film with an ISO rating of 1000 or faster is used, the imprinted characters may blur.
- If film with ISO rating of 50 or slower is used, the printed characters may be dark or dim.
- If you release the shutter while the blinking data is being corrected, the data cannot be imprinted.

## (12) USING A PENTAX DEDICATED EXTERNAL FLASH

If the built-in flash is not powerful enough, a Pentax dedicated external flash should be used.


### Using the TTL Auto Flash Mode

- Remove the hot shoe cover F<sub>c</sub> and attach a Pentax dedicated flash unit.
- 2. Turn ON the flash.
- 3. Set the flash unit to the TTL Auto Mode.
- 4. Ensure that the flash is fully charged.
- Proceed as if the built-in flash were being used.
- When the flash is fully charged, the ready lamp on the flash unit lights up. When the shutter release button is depressed halfway down, [ 4 ] appears in the viewfinder indicating the flash is ready.

## Using the built-in flash and the external flash simultaneously

An external flash cannot be used when the built-in flash is in its popped up position. When the built-in flash and the external flash are used simultaneously, use the following optional accessories.

- Hot Shoe Adapter F<sub>G</sub>
   To be attached to the hot shoe of the camera.
- Off-Camera Shoe Adapter F
   To be attached to the Hot Shoe Bracket of the External flash. A tripod can be installed at the bottom of the Off-Camera Shoe Adapter
- Extension Cord F5P
   Connection cord for the Hot Shoe Adapter F<sub>G</sub> and Off-Camera Shoe Adapter.

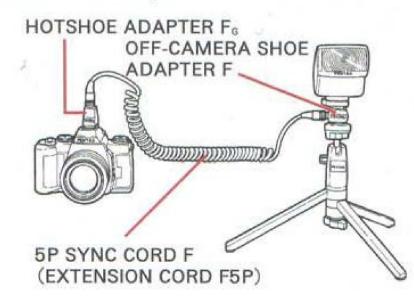

#### AF500FTZ and AF330FTZ

- These flash units feature a built-in infrared spotbeam to assist the autofocus system in dim light and lowcontrast conditions.
- The auto zoom function will automatically adjust the angle of discharge according to the lens focal length only when an F or FA lens is in use.
- The AF500FTZ features a wireless slave-sync flash function.
- The flash effective range appears on the LCD panel only when an A, F, or FA lens is in use.
- Multiple flash burst on a single frame is possible with the AF500FTZ.
- These flash units feature the contrast-control-sync flash. See page 77 for more details.
- In the Smart Picture Mode, Picture Mode, Shutter-Priority AE, or Aperture-Priority AE, the TTL Auto Flash Mode will be set automatically even if the flash is set to the Manual Mode.
- When the flash is charged and left unused for about 3 minutes, the power automatically switches off to save battery power. Depressing the shutter release button halfway down will restart charging of the flash units.

#### AF240FT, AF400FTZ

- These flash units feature a built-in infrared spotbeam to assist the autofocus system in dim light and lowcontrast conditions.
- In the Smart Picture Mode, Picture Mode, Shutter-Priority AE, or Aperture-Priority AE, the TTL Auto Flash Mode will be set automatically even if the flash unit is set to the Manual Mode.
- When the flash unit is charged and left unused for about 5 minutes, the power will automatically switch off to save battery power. Depressing the shutter release button halfway down will restart charging of the flash unit.

#### AF200T, AF280T, and AF400T

• If the TTL Auto Mode is selected, these flash units can be used for daylight-sync shooting, because the shutter speed is adjusted according to the ambient brightness. The slower shutter speed varies according to the lens focal length. The shutter speed varies within the shutter speed range of 1/100 second to a slower speed which does not cause camera shake. However, when a non-autofocus lens or the Action Program Mode is in use, the shutter speed is set to 1/100 second. The aperture value will also be fixed but will vary depending on what ISO film is loaded. • When using the Three-Level Auto (red, green, and yellow settings) Mode, the aperture value is fixed as shown in the table. When the flash is fully charged, the shutter speed varies within the shutter speed range of 1/100 of second to a slower speed which does not cause camera shake. The slowest shutter speed varies according to the lens focal length. When a non-autofocus lens is in use, the shutter speed will be set to 1/100 of second.

	AF200T	AF280T	AF400T
Red	f/2.8	f/4	f/4
Green	f/5.6	f/8	f/8
Yellow			f/11

with ISO 100

#### Notes on Pentax dedicated flash units

When the built-in flash is used in combination with a Pentax dedicated flash unit, if the trailing-shutter-curtain-sync flash mode is set for the dedicated flash unit, the built-in flash also operates in the trailing-shutter-curtain-sync flash mode. Ensure that both flash units are fully charged before releasing the shutter.

Contrast-Control Flash Photography

Using the AF330FTZ or AF500FTZ in combination with the built-in flash allows twin flash photography (contrast-control flash photography). This is based on the difference between the amount of light discharged from two units.

- Put the AF500FTZ or AF330FTZ in the Contrast-Control Flash Mode. See the flash connections on page 75.
- Ensure that both flash units are fully charged and then shoot.
- The ratio of the amount of flash light is 1 (built-in flash): 2 (dedicated flash unit).
- Do not combine an accessory with a different number of contacts such as a "Hot Shoe Grip" as a malfunction may occur.
- In the Contrast-Control-Sync Flash Mode, the top flash sync speed is 1/60 of second.

## Multi-burst flash with the Pentax dedicated flash

When discharging more than 2 Pentax dedicated flashes, make sure that they are of the same type, combine the Type B with Type C or Type D with Type E. Refer to the overview of Flash Function on page 78. The Built-in flash can be operated with any type of Pentax TTL dedicated flash unit.

#### Overview of Flash Function

CAMERA FUNCTION	TYPE A	TYPE B	TYPE C	TYPE D	TYPE E
After the flash is charged, the camera automatically switches to the flash-sync speed.	0	0	0		
Automatic aperture setting in the Smart Picture Mode, Picture Mode or Shutter-Priority AE Mode	0	0	0	○*1	O*1
Flash confirmation in the viewfinder		0	0		
TTL auto flash	0	0	0	○*2	
Slow-speed sync in the Shutter-Priority AE Mode or Metered Manual Mode	0	0	0	0	○*3
AF spotbeam	10	0	0		
Trailing-shutter-curtain sync flash ( * 4)	*5	0	0		
Contrast-control flash mode ( * 4)		0			

TYPE A: Built-in flash

TYPE B: AF500FTZ(\*6), AF330FTZ

TYPE C: AF400FTZ, AF240FT

TYPE D: AF400T, AF280T, AF200T, AF080C,

AF140C, AF200S,

TYPE E : AF200S, AF160, AF140,

#### Notes:

\*1. When using a Type D flash (except AF200S<sub>A</sub>) in the MS (Manual Sync) or M (Manual) Mode or when using a Type E flash, set the camera's exposure mode to the Aperture-Priority AE Mode, Metered Manual or Bulb. The Smart Picture Mode, Picture Mode and Aperture-Priority AE Modes cannot be used because the actual required aperture value may change.

- \* 2. Only the AF200S, flash does not operate.
- \* 3. Only the Metered Manual Mode can be used.
- \* 4. The shutter speed is 1/60 of second or slower.
- \* 5. Trailing-shutter-curtain sync flash combined with TYPE B or TYPE C flash.
- \* 6. Multi-burst and slave-sync flash are possible.

### Using other type of a flash

Use of non-Pentax flash units may damage the camera. For the best results, use a Pentax dedicated flash unit.

# ADVANCED OPERATIONS

## (13) DAYLIGHT-SYNC SHOOTING



Without Daylight-Sync



With Daylight-Sync

#### Purpose

In daylight conditions, when a portrait picture is taken with a person's face cast in shadow, discharging the flash will eliminate the shadow.

Daylight-sync photography is obtained in the same manner as the normal flash photography, so you simply depress the shutter release button.

- If the background is too bright, it may be overexposed.

## (14) SLOW-SPEED-SYNC SHOOTING



#### Purpose

It is possible to balance the exposure of a foreground subject against a dimly-lit background by using the flash to properly expose the foreground subject and a slow-shutter-speed to expose the low light background.

#### How to set

With the Metered Manual Mode set

- Depress the flash pop-up button to activate the built-in flash.
- 2. Set the camera's exposure mode to the Metered Manual Mode.
- Select an appropriate shutter speed(slower than 1/100 of second) and aperture combination for a correct exposure.
- 4. Release the shutter.

#### How to set

With the Shutter-Priority AE Mode set

- 1. Set the camera's exposure mode to the Shutter-Priority AE Mode.
- 2. Set the desired shutter speed.
- If the aperture in the viewfinder and the LCD panel blink, a correct exposure will not be obtained for the background. Adjust the shutter speed until the blinking stops.
- Depress the flash-pop up button to activate the built-in flash.
- 4. Release the shutter.
- In the slow-speed-sync shooting, use of a tripod is recommended to prevent camera shake.

# (15) ACCESSORIES (OPTION)

A number of dedicated accessories are available for this camera.

#### Cable Switch F

A shutter release cord designed for use with the MZ-10/ZX-10, MZ-5/ZX-5, Z-70/PZ-70, Z-1/PZ-1, Z-20/PZ-20, Z-10/PZ-10.

Magnifier F<sub>B</sub>

A viewfinder accessory for magnifying the central area of the viewfinder.

#### AF500FTZ

A TTL Auto Zoom flash with a built-in AF spotbeam and large guide number of 50 in meters (ISO 100). It features the slave sync flash function, multiple flash burst, contrast-control-sync flash, leading/trailing-curtain flash mode.

#### AF330FTZ

A TTL Auto Zoom flash with a built-in AF spotbeam and guide number of 33 in meters (ISO 100). It features the contrast-control flash, leading/trailing-curtain sync flash mode.

 Hot Shoe Adapter F<sub>G</sub>, Extension Cord F5P and Off-Camera-Shoe Adapter.

The adapters and cord which allow the AF240FT, AF330FTZ, AF400FTZ and AF500FTZ to be used off the camera, while maintaining full electronic coupling to the camera.

AF Adapter 1.7X

An adapter for autofocus photography using a non-autofocus lens with a maximum aperture of f/2.8 or larger.

Macro Flash AF140C

A TTL macro flash unit with the guide numbers 14 in meters (ISO 100).

Refconverter A

Right angle finder which attaches to the grooves on both sides of the viewfinder. The viewfinder magnification is able to switch from 1X to 2X.

• Filters

Skylight, Cloudy, UV, Y2, O2, R2, and Circular Polarizing Filter are available. Each filter is available in sizes of 49mm, 52mm, 67mm and 77mm.

AA-Battery Pack F<sub>G</sub>


The battery pack which takes four AA batteries can attach at the bottom of the camera, instead of using the lithium batteries.


#### Notes on accessories


- "Auto Bellows A" cannot be used in combination with the double cable release. When taking a vertical photograph, position the camera with the grip facing upward.
- When attaching the "ADAPTER K FOR 645 LENS" to the camera body, the camera shift lock screw of the lens may hit the camera body. To avoid this, change the position of the fixing screw.

# ADVANCED OPERATIONS

## (16) CAMERA CASE







The soft case is available as an option and consists of a front and a back cover.

- Open the front case and place the camera body in the back case.
- Fasten the back case to the camera body by tightening the fitting screw in the tripod socket.
- 3. Attach the front case.
- Choose one of the front cases in accordance with the table to the right.
- The back case F<sub>G</sub> is the same back case indicated with the Soft case S,M and L.

#### Front case comes in three sizes, S, M and L

Case	Applicable F, FA-lens
F <sub>G</sub> S	20mm, 28mm, 50mm f/1.4, f/1.7, Fish- Eye Zoom 17-28mm, Zoom 35-80mm
F <sub>G</sub> M	24mm, Macro 50mm, 135mm, Zoom 28- 70mm f / 4, Soft 85mm
F <sub>G</sub> L	85mm f / 1.4, Macro 100mm, Zoom 28- 80mm, Zoom 28-105mm, Zoom 70-200mm, F Zoom 80-200mm

# (17) EFFECT OF APERTURE AND SHUTTER SPEED



High shutter speed



Slow shutter speed


A correct exposure is established by a combination of shutter speed and aperture setting according to the subject brightness. There are many correct combinations of shutter speed and aperture for a particular subject brightness. Different shutter speed and aperture settings produce different effects.

### Effect of Shutter Speed

The shutter speed determines the film exposure time, or the length of time that light is allowed to strike the film. If the subject is moving the image will be blurred when a slow shutter speed is used. It is possible to enhance the effect of motion, (The movement of a wave or waterfall) by intentionally using a slower speed. Choosing a higher shutter speed will allow the image of a moving subject to be frozen. A higher shutter speed also helps prevent camera shake.



Closed-down aperture

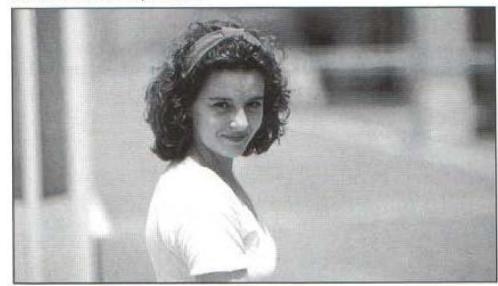


Open aperture

#### **Effect of Aperture**

The aperture increases or reduces the amount of reflected light from an object which passes through the lens, controlling how much light strikes the film. If the aperture is opened up to increase the amount of light, objects in front of and behind an in-focus subject will not be focused. That is, the range of focus (depth of field) becomes small. If the aperture is closed down to reduce the amount of light, the depth of field increases. For instance, if you shoot a person against a landscape with the aperture open, the landscape in front of and behind the person will be blurred, making the person appear to rise out of the landscape. By contrast, closing down the aperture increases the in-focus range.

# (18) DEPTH OF FIELD

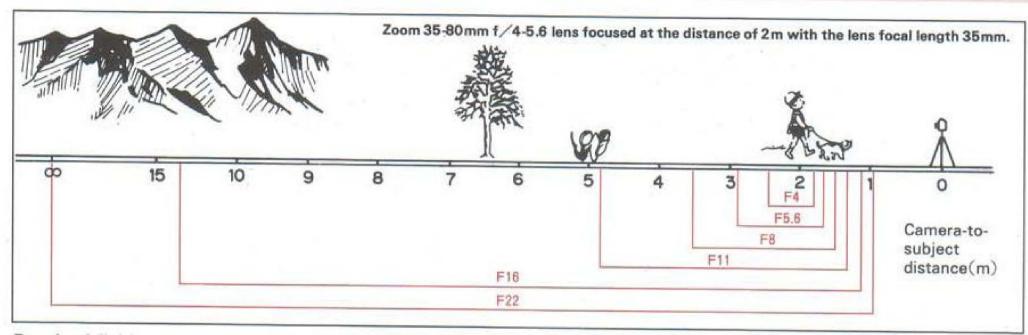


Depth of field refers to the range around the optimum focusing point of the subject in which the elements at different distances are in focus. The depth of field increases as the aperture is closed down, the focal length of the lens becomes shorter, or the subject is positioned farther away.

## The Range Allowed for Focusing

The in-focus range varies depending on the aperture in use. Zoom lenses do not have a depth-of-field scale for mechanical considerations.

# ADVANCED OPERATIONS


## (19) INFRARED INDEX

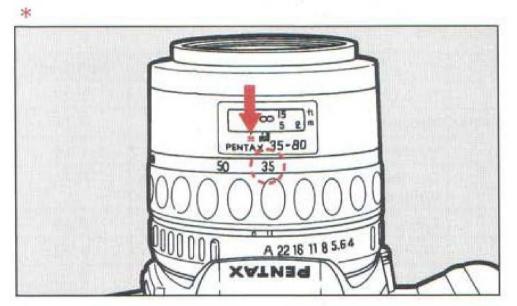

When infrared film and an "R2" or "O2" filter are used, the focal point is different from that of ordinary film exposed in visible light. The autofocus system cannot compensate for this difference automatically.

1. Focus on a subject as usual.

 Set the focus mode switch to [MF] and turn the focusing ring to the left by the distance indicated on the infrared index.

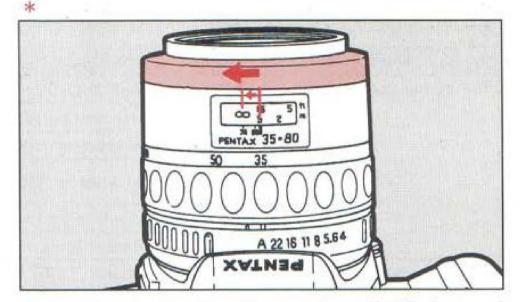

- \* As shown in the illustration, if 35 is read from the zoom scale, adjust the distance scale to 35 on the infrared index (red line).
- In the autofocus mode, the focus cannot compensate for infrared pictures.
- To set the proper exposure level for infrared pictures, refer to the instructions accompanying the film. The Auto Exposure Mode does not give a correct exposure. Use the Metered Manual Mode.

Symptoms	Causes	Remedies	Reference
The shutter does not release.	The main switch is [OFF]	Turn ON the main switch.	P.20
	The low battery warning [ appears.	Replace the battery.	P.14
	The battery is improperly installed.	Install the battery properly.	P.14
	The mode dial is set at [ISO SET].	Set the exposure compesation dial to the another position.	P.71
	Self-timer mode is being set.	Cancel the self-timer mode.	P.44
	The built-in flash is being charged.	Wait until the flash is fully charged.	P.38
Indicators do not appear on the LCD panel.	The main switch is [OFF].	Turn ON the main switch.	P.20
	No battery has been installed.	Install the battery.	P.14
	The battery is improperly installed.	Install the battery properly.	P.14
	The battery is dead.	Replace the battery.	P.14
The camera does not focus.	AF frame is not placed over the subject.	Move the camera until the AF frame [ ] covers the subject.	P.35
	The subject is too close.	Increase the camera-to-subject distance.	P.35
	The focus mode is set to [MF].	Set the focus mode switch to [AF].	P.34
	The subject is difficult to autofocus.	Focus manually by using the matte field.	P.48



-	
-	2-
-	T
	-
	$\mathbf{C}$
	-
	T
	-
	-
	-2.5

Symptoms	Causes	Remedies	Reference
[O] blinks in the viewfinder.	The subject is too close or difficult to autofocus.	Focus manually by using the matte field.	P.48
The built-in flash does not charge.	The battery is dead.	Replace the battery.	P.14
The power zoom system does not function.	The lens is in the manual zoom mode.	Push the power zoom ring forward until the words [POWER ZOOM] appear.	P.32
The lens focuses when zooming.	The camera focuses automatically when the power zoom operated.		

# SPECIFICATIONS

Туре	TTL autofocus, auto-exposure 35mm SLR with built-in TTL auto flash (RTF)
Format	24x36mm (approx. 13x36 in panorama format)
Usable Film	35mm perforated cartridge film. DX-coded film with ISO 25-5000; ISO 6-6400 when manually set
Exposure Modes	Smart Picture Mode, Picture Mode (Green Operation Mode, Portrait Program Mode, Landscape Program Mode, Close-up Program Mode, Action Program Mode), Shutter-Priority AE Mode, Aperture-Priority AE Mode, Metered Manual Mode, Bulb Mode, TTL Flash Mode
Shutter	Electronically controlled vertical-run focal-plane shutter, Electromagnetic release, Speed range: (1) Auto 1/2000-30 sec. (stepless), (2) Manual 1/2000-30 sec. (3) Bulb, Shutter lock by setting Main switch in OFF position.
Lens Mount	Pentax KAF2 bayonet mount (K-mount with AF coupler, lens information contacts and power contacts)
Compatible Lens	Pentax KAF2-, KAF-, KA-, and K-mount lenses are usable. Autofocus is possible using AF Adapter with KA-mount lenses.
Autofocus System	TTL phase-matching multi(3-point) autofocus system, AF operational brightness range: EV-1 to 18(at ISO 100 with f / 1.4 lens), Focus lock available using shutter release button, Focus Mode: AF (predictive AF provided), Manual [ MF ]
Power Zoom	3-Speed Intelligent Power Zoom lens with built-in motor with FA zoom lens
Viewfinder	Pentamirror finder, Natural-Bright-Matte focusing screen, Field of view:92%, Magnification:0.77X(with 50mm lens at ∞), Diopter: -1 diopter, Panorama format frame
Viewfinder Indication	Focus Information: In-focus (Green lamp [ ] is lit), front or back focus signals and unable-to-focus indicator (Green lamp blinks), Shutter speed indication, Aperture indication, Flash ready indication [ ] is lit, Bar graph(exposure compensation), Over or Under exposure indication in Metered Manual Mode, [ ] exposure compensation indication, Green Operation Mode [ ], Portrait Program Mode [ ], Landscape Program Mode [ ], Close-up Program Mode [ ], Action Program Mode [ ]
External LCD panel Indication	— [M] = Metered Manual Mode, [☑] = Green Operation Mode, [☑] = Portrait Program Mode, [☑] = Landscape Program Mode, [☑] = Close-up Program Mode, [☑] = Action Program Mode, Shutter speed indication, Aperture indication, [☑] = Built-in flash ready indication, [☑] = blinking slowly flash recommended warning, [☑] = blinks rapidly Inappropriate lens warning, [☑] = Red-eye reduction flash mode, [☑] = Automatic flash function, ISO indication, [☑] = Film status information, [☑] = Battery exhaustion warning, Exposure counter, [□]] = PCV signal indication, [☑] = Exposure compensation, Exposure compensation, exposure compensation, exposure compensation, exposure compensation, exposure compensation value

Self-timer	Electronically-controlled type with delay time of 12 sec. Start by depressing of shutter release button, Operation confirmation: By PCV beep tone. Cancelable after operation
Mirror	Instant-return mirror with AF secondary mirror
Film Loading	Film advances automatically to 1st frame after back cover is closed, Film information window is provided
Film Wind & Rewind —	Auto wind/rewind by built-in motor, Consecutive or Single advance mode, Approx.2 frames/sec.(consecutive mode), Auto rewinding starts at end of roll, Film rewind/completion of rewinding is displayed on the LCD panel, Mid-roll rewind button will rewind film in mid-roll
Exposure Meter -	TTL multi(6)-segment metering, Metering range from EV0 to EV21 at ISO100 with 50mm f / 1.4 lens
<b>Exposure Compensatio</b>	n: ± 3EV in 0.5EV step increments
Flash —————	Series-control, Retractable TTL Auto Flash (RTF), Guide number:11 (ISO100/m), Illumination angle covers 28mm lens angle of view, Flash-sync-speed in the range from 1/100 sec. to a slower speed, Day-light-sync flash, Slow-speed-sync flash, Contrast-control flash (ISO range = 25 - 400), Automatic flash function, Red-eye reduction flash function
Flash sync	-Hot shoe with X-contact with couples with Pentax dedicated auto flashes, ISO range = 25-800 -Two 3V lithium batteries (CR2 or equivalent)
Battery Exhaustion Warning	Battery exhaustion symbol [ is lit (blinking when the shutter is locked; no indication on the right-hand edge of the viewfinder.)
	-135.0mm(W)x90.5mm(H)x62.5mm(D) (5.3"x3.6"x2.5") 350g(12.3 oz) body only without batteries
Date Model	
Date mechanism	-Crystal quartz controlled LCD with digital clock, auto calendar up to 2019. Possible to print both standard and panorama format picture. 7-segment, 6-digit liquid crystal digital display
Imprinting mode Power source	year/month/day, day/month/year, month/day/year, day/hour/minute, and "" (blank)  3V lithium battery (CR 2025 or equivalent)

SPECIFICATIONS ARE SUBJECT TO CHANGE AT ANY TIME WITHOUT NOTIFICATION OR ANY OBLIGATION ON THE PART OF THE MANUFACTURER.


Dimention and Weight -135,00mm(W)x90.5mm(H)x62.5mm(D) (5.3"x3.6"x25")365g(12.9oz)body only with out batteries.

Supplied Accessories Hot Shoe Cover Fc, Release Socket Cap F, Camera Strap Fc, Eye Cup FH, Finder Cap

Number of prints — Approx. 5000


# **PROGRAM LINE**

## **Green Operation Mode**

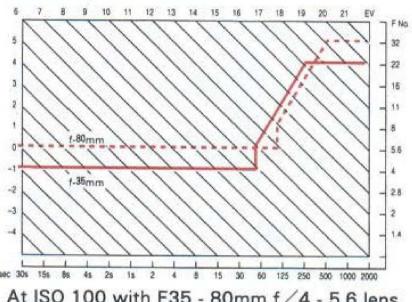


At ISO 100 with F35 - 80mm f / 4 - 5.6 lens

#### Landscape Program Mode

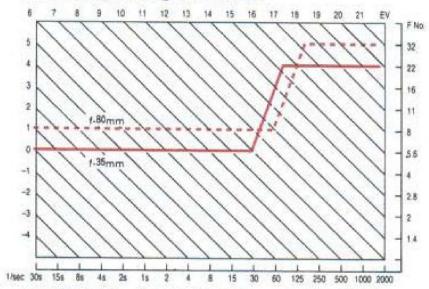


At ISO 100 with F35 - 80mm f / 4 - 5.6 lens



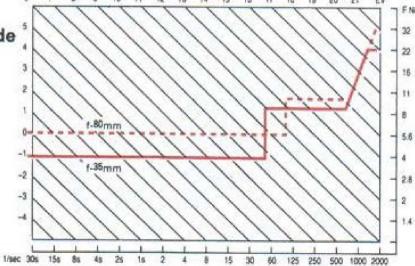


At ISO 100 with F35 - 80mm f / 4 - 5.6 lens

## **Action Program Mode**

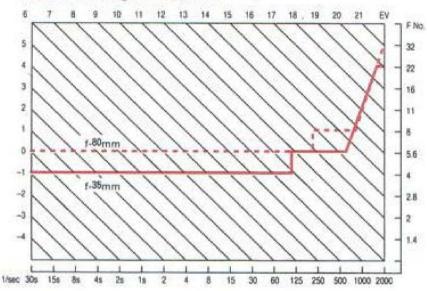

At ISO 100 with F35 - 80mm f / 4 - 5.6 lens

#### Close-up Program Mode

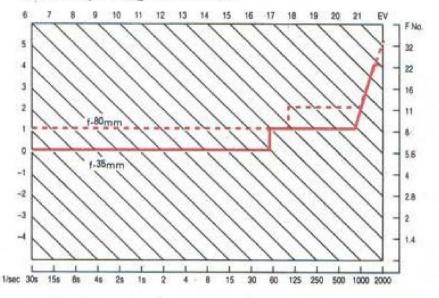

At ISO 100 with F35 - 80mm f / 4 - 5.6 lens

## WARRANTY POLICY

All Pentax cameras purchased through authorized bona fide photographic distribution channels are guaranteed against defects of material or workmanship for a period of twelve months from date of purchase. Service will be rendered, and defective parts will be replaced without cost to you within that period, provided the equipment does not show evidence of impact, sand or liquid damage, mishandling, tampering, battery or chemical corrosion, operation contrary to operating instructions, or modification by an unauthorized repair shop. The manufacturer or its authorized representatives shall not be liable for any repair or alterations except those made with its written consent and shall not be liable for damages from delay or loss of use or from other indirect or consequential damages of any kind, whether caused by defective material or workmanship or otherwise; and it is expressly agreed that the liability of the manufacturer or its representatives under all guarantees or warranties, whether expressed or implied, is strictly limited to the replacement of parts as hereinbefore provided. No refunds will be made on repairs by non-authorized Pentax service facilities.


Procedure During 12-month Warranty Period

Any Pentax which proves defective during the 12month warranty period should be returned to the dealer from whom you purchased the equipment or to the manufacturer. If there is no representatives of the manufacturer in your country, send the equipment to the manufacturer, with postage prepaid. In this case, it will take a considerable length of time before the equipment can be returned to you owing to the complicated customs procedures required. If the equipment is covered by warranty, repairs will be made and parts replaced free of charge, and the equipment will be returned to you upon completion of servicing. If the equipment is not covered by warranty, regular charges of the manufacturer or of its representatives will apply. Shipping charges are to be borne by the owner. If your Pentax was purchased outside of the country where you wish to have it serviced during the warranty period, regular handling and servicing fees may be charged by the manufacturer's representatives in that country. Notwithstanding this, your Pentax returned to the manufacturer will be serviced free of charge according to this procedure and warranty policy.

In any case, however, shipping charges and customs clearance fees to be borne by the sender. To prove the date of your purchase when required, please keep the receipt or bills covering the purchase of your equipment for at least a year. Before sending your equipment for servicing, please make sure that you are sending it to the manufacturer's authorized representatives or their approved repair shops, unless you are sending it directly to the manufacturer. Always obtain a quotation for the service charge, and only after you accept the quoted service charge, instruct the service station to proceed with the servicing.

The local warranty policies available from Pentax distributors in some countries can supersede this warranty policy. Therefore, we recommend that you review the warranty card supplied with your product at the time of purchase, or contact the PENTAX distributor in your country for more information and to receive a copy of the warranty policy.

## NAMES OF WORKING PARTS II

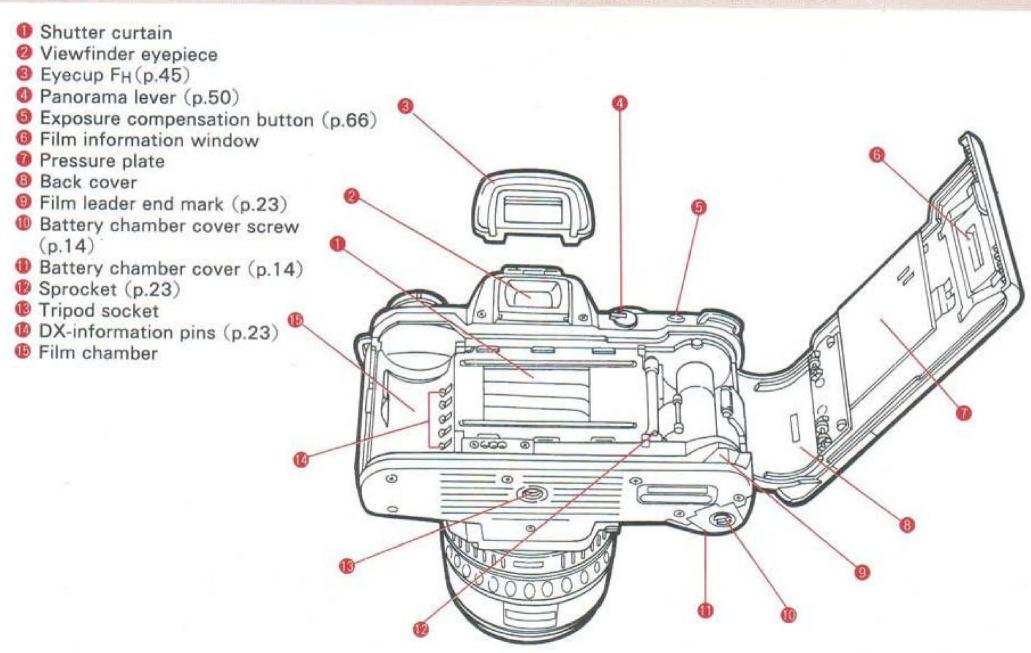



Asahi Optical Co., Ltd. 11-1, Nagata-cho 1-chome, Chiyoda-Ku, Tokyo 100, JAPAN

Pentax Europe n.v. Weiveldlaan 3-5, 1930 Zaventem, BELGIUM

Pentax GmbH Julius-Vosseler-Straße 104, D-22527 Hamburg, GERMANY

Pentax U.K. Limited Pentax House, Heron Drive, Langley, Slough SL3 8PN, U.K.

Pentax France 12-14, rue Jean Poulmarch, 95106 Argenteuil, FRANCE

Pentax Benelux B.V. (for the Netherlands) Spinveld 25, 4815 HR Breda, NETHERLANDS

(for Belgium & Luxemburg) Weiveldlaan 3-5, 1930 Zaventem, BELGIUM

Pentax (Schweiz) AG Industriestraße 2, 8305 Dietlikon, SWITZERLAND

Pentax Scandinavia AB Box 650, 75127 Uppsala, SWEDEN

Pentax Corporation 35 Inverness Drive East, Englewood, Colorado 80112, U.S.A.

Pentax Canada Inc. 3131 Universal Drive, Mississauga, Ontario L4X 2E5, CANADA

PENTAX (E

The CE marking assures that this product complies with the requirements of the EC directive for safety.

Copyright © Asahi Optical Co., Ltd. 1996. 7/96 Printed in Belgium